

Cluster Active Archive: Interface Control Document for STAFF

	Name	Date	Signature
Prepared by:	Véronique BOUZID Corinne BURLAUD Nicole CORNILLEAU-WEHRLIN Milan MAKSIMOVIC Laurent MIRIONI Rodrigue PIBERNE Patrick ROBERT Ralph KATRA	2017-04-14	
Reviewed by:	Rodrigue PIBERNE Ralph KATRA	2017-04-26	
Approved by:	STAFF Team	2017-05-15	
Accepted by:			

Document Status Sheet

Issue	Date	Details
1.0	2005-05-04	Draft (no release)
2.0	2006-11-30	First release
3.0	2009-01-08	Second release
4.0	2010-05- ^{**}	Third release
4.1	2011-05- ^{**}	Fourth release
5.0	2012-05-10	Fifth release
5.1	2013-04-30	Sixth release
5.2	2014-05-15	Seventh release
5.3	2015-10-30	Eighth release
5.4	2016-05-09	Ninth release
5.5	2017-04-26	Tenth release

Document Change Record

Issue	RID/ Ref	Details
1.0		First draft
2.0		DWF, AGC, SM, PSD products definition
3.0		General update DWF definition update New product CS definition
4.0		General update Dataset headers definition New product: PSD/SM caveats New product PPP definition
4.1		General Update
5.0		Update document according to CAA progress meeting remarks New product: CWF definition
5.1		General update, in particular DWF and CWF format; HK plots
5.2		General update. Modify DWF description according to the new products and add CWF in ISR2 description and add Calibration caveats description
5.3		General update. Modify SM, PSD, AGC and PPP description according to new products

5.4		§3.1 update (DWF description).
5.5		General update. Addition of the UNDEFINED_MFA and PROBEFAIL caveats descriptions.

Table of Contents

Purpose	8
Points of Contact	8
1 Instrument Description	9
1.1 Science Objectives.....	9
1.2 Hardware Overview.....	9
1.2.1 The search coil sensors and the preamplifier	10
1.2.2 The magnetic waveform unit.....	12
1.2.3 The spectrum analyser	13
1.2.4 In flight calibration	13
1.2.5 Operational modes	14
1.2.6 Status word.....	17
1.2.7 Data compression.....	20
1.3 Data Processing Chain	21
1.3.1 On board data processing	21
1.3.2 Ground processing	23
1.3.3 Science processing.....	24
2 Data Provision – General Conventions.....	27
2.1 Formats	27
2.2 Standards.....	27
2.2.1 Time standards	27
2.2.2 Coordinate systems	27
2.2.3 Units.....	28
2.3 Production Procedures.....	28
2.3.1 STAFF-SC	28
2.3.2 STAFF-SA.....	28
2.4 Quality Control Procedures	29
2.4.1 STAFF-SC	29
2.4.2 STAFF-SA.....	29
2.5 Delivery Procedures	29
3 Data Provision – Specific Descriptions	30
3.1 Level 1 Data – SC - Decommutated Wave Form (DWF).....	30
3.1.1 Format: CEF	30
3.1.2 Standard: cf 2.2.	30
3.1.3 Production Procedure: cf 2.3.1.	30
3.1.4 Quality Control Procedure: cf 2.4.1.....	30
3.1.5 Delivery Procedure	30
3.1.6 Product Specification	30
3.1.7 Dataset metadata description	30
3.1.8 File Metadata Specification.....	39
3.1.9 Dataset header example.....	40
3.1.10 Dataset file example	46
3.2 Level 2 data – SC – Calibrated WaveForm (CWF).....	48
3.2.1 Format: CEF	48
3.2.2 Standard: cf 2.2.	48
3.2.3 Production Procedure: cf 2.3.1.	48
3.2.4 Quality Control Procedure: cf 2.4.1.....	48
3.2.5 Delivery Procedure	48
3.2.6 Product Specification	48
3.2.7 Dataset metadata description	48
3.2.8 File Metadata Specification.....	56
3.2.9 Dataset header example.....	57
3.2.10 Dataset file example	61
3.3 Level 2 data - SC - Complex Spectra (CS)	64
3.3.1 Format: CEF	64
3.3.2 Standard: cf 2.2.	64
3.3.3 Production Procedure: cf 2.3.1.	64

3.3.4	Quality Control Procedure: cf 2.4.1.....	64
3.3.5	Delivery Procedure	64
3.3.6	Product Specification	64
3.3.7	Dataset metadata description	64
3.3.8	File Metadata Specification.....	70
3.3.9	Dataset header example.....	71
3.3.10	Dataset file example	76
3.4	Level 2 data – SA- Automatic Gain Control (AGC).....	80
3.4.1	Format: CEF	80
3.4.2	Standard: cf 2.2.	80
3.4.3	Production Procedure: cf 2.3.1.	80
3.4.4	Quality Control Procedure: cf 2.4.1.....	80
3.4.5	Delivery Procedure	80
3.4.6	Product Specification	80
3.4.7	Dataset metadata description	81
3.4.8	File Metadata Specification.....	84
3.4.9	Dataset header example.....	85
3.4.10	Dataset file example	87
3.5	Level 2 data - SA - Power Spectral Density Files (PSD)	89
3.5.1	Format: CEF	89
3.5.2	Standard: cf 2.2.	89
3.5.3	Production Procedure: cf 2.3.2.	89
3.5.4	Quality Control Procedure: cf 2.4.2.....	89
3.5.5	Delivery Procedure	89
3.5.6	Product Specification	89
3.5.7	Dataset metadata description	90
3.5.8	File Metadata Specification.....	94
3.5.9	Dataset header example.....	94
3.5.10	Dataset file example	97
3.6	Level 2 data – SA- Spectral Matrices Files (SM)	100
3.6.1	Format: CEF	100
3.6.2	Standard: cf 2.2.	100
3.6.3	Production Procedure: cf 2.3.2.	100
3.6.4	Quality Control Procedure: cf 2.4.2.....	100
3.6.5	Delivery Procedure	100
3.6.6	Product Specification	100
3.6.7	Dataset metadata description	101
3.6.8	File Metadata Specification.....	105
3.6.9	Dataset header example.....	106
3.6.10	Dataset file example:	109
3.7	Level 3 data - Graphical Data (Plots).....	113
3.7.1	Format: binary.....	113
3.7.2	Standard: N.A.	113
3.7.3	Production Procedure: N.A.	113
3.7.4	Quality Control Procedure: N.A.	113
3.7.5	Delivery Procedure	113
3.7.6	Product Specification	113
3.7.7	File Metadata Specification.....	115
3.8	Level 3 data - SA – Polarization and Propagation Parameters (PPP).....	116
3.8.1	Format: CEF	116
3.8.2	Standard: cf 2.2.	116
3.8.3	Production Procedure: cf 2.3.2.	116
3.8.4	Quality Control Procedure: cf 2.4.2.....	116
3.8.5	Delivery Procedure	116
3.8.6	Product Specification	116
3.8.7	Dataset metadata description:	117
3.8.8	File Metadata Specification.....	122
3.8.9	Dataset header example.....	123

3.8.10	Dataset file example	127
3.9	Auxilliary data –CAVEAT file for SM/PPP STAFF-SA – PSDNEG	129
3.9.1	Format: CEF	129
3.9.2	Standard: cf 2.2.	129
3.9.3	Production Procedure: cf 2.3.2.	129
3.9.4	Quality Control Procedure: cf 2.4.2.	129
3.9.5	Delivery Procedure	129
3.9.6	Product Specification	129
3.9.7	Dataset metadata description	129
3.9.8	File Metadata Specification	130
3.9.9	Dataset header example	131
3.9.10	Dataset file example	132
3.10	Auxilliary data – CAVEAT file for PPP STAFF-SA – UNDEFINED MFA CAVEATS	133
3.10.1	Format: CEF	133
3.10.2	Standard: cf 2.2.	133
3.10.3	Production Procedure: cf 2.3.2.	133
3.10.4	Quality Control Procedure: cf 2.4.2.	133
3.10.5	Delivery Procedure	133
3.10.6	Product Specification	133
3.10.7	Dataset metadata description	133
3.10.8	File Metadata Specification	135
3.10.9	Dataset header example	135
3.10.10	Dataset file example	136
3.11	Auxilliary data – CAVEAT file for PSD/SM/PPP STAFF-SA – PROBEFAIL_CAVEATS ..	138
3.11.1	Format: CEF	138
3.11.2	Standard: cf 2.2.	138
3.11.3	Production Procedure: cf 2.3.2.	138
3.11.4	Quality Control Procedure: cf 2.4.2.	138
3.11.5	Delivery Procedure	138
3.11.6	Product Specification	138
3.11.7	Dataset metadata description	138
3.11.8	File Metadata Specification	139
3.11.9	Dataset header example	139
3.11.10	Dataset file example	141
3.12	Auxilliary data –CAVEAT file for STAFF data – NOTSRP	142
3.12.1	Format: CEF	142
3.12.2	Standard: cf 2.2.	142
3.12.3	Production Procedure: cf 2.3.2.	142
3.12.4	Quality Control Procedure: cf 2.4.2.	142
3.12.5	Delivery Procedure	142
3.12.6	Product Specification	142
3.12.7	Dataset metadata description	143
3.12.8	File Metadata Specification	143
3.12.9	Dataset header example	144
3.12.10	Dataset file example	145
3.13	Auxilliary data –CAVEAT file for STAFF data – CALIBRATION	146
3.13.1	Format: CEF	146
3.13.2	Standard: cf 2.2.	146
3.13.3	Production Procedure: cf 2.3.2.	146
3.13.4	Quality Control Procedure: cf 2.4.2.	146
3.13.5	Delivery Procedure	146
3.13.6	Product Specification	146
3.13.7	Dataset metadata description	146
3.13.8	File Metadata Specification	147
3.13.9	Dataset header example	148
3.13.10	Dataset file example	149
APPENDIX A - References for STAFF description		151
APPENDIX B – List of acronyms.....		152



PURPOSE

The purpose of this document is to provide a broad outline of the archiving of the data from the STAFF instrument on Cluster in the ESA Cluster Active Archive (CAA) and to define the agreement of the CAA and PI of STAFF on this broad outline.

The scientific rationale underpinning the CAA activities is as follows:

- Maximise the scientific return from the mission by making all Cluster data available to the worldwide scientific community.
- Ensure that the unique data set returned by the Cluster mission is preserved in a stable, long-term archive for scientific analysis beyond the end of the mission.
- Provide this archive as a major contribution by ESA and the Cluster science community to the International Living With a Star programme.

In the case of STAFF the main responsibilities will be:

- Deliver to CAA high resolution STAFF data in an agreed format at the best possible quality level, as far as possible in physical units (Level 2 data). When not in physical units (possible case of the waveform data) the calibration files and the relevant software to calibrate the data will be delivered with the adequate documentation. Additional value added products will be delivered too, on the best effort basis, as well as graphical displays. All needed caveat regarding data quality and necessary documentation will be delivered.

POINTS OF CONTACT

For the operation of archiving the high-resolution data from STAFF the following contacts have been agreed:

- as scientific correspondents, C. P. Escoubet/H. Laakso for the CAA and P. Canu and N. Cornilleau-Wehrin for STAFF-SC/ O. Alexandrova for STAFF-SA.
- as technical correspondents, C. Perry and H. Laakso for the CAA and R. Piberne for STAFF-SC/ Q. N. Nguyen for STAFF-SA.
- as managerial correspondents, H. Laakso for the CAA and P. Canu for STAFF.

1 INSTRUMENT DESCRIPTION

1.1 Science Objectives

The Cluster mission has been designed to study the thin layers of the interaction regions between the solar wind and the Earth's magnetosphere. The very existence of these regions, with their different plasma bulk properties, is largely due to wave-particle interactions which, in a collisionless plasma, provide the only means of modifying the bulk properties of plasma crossing the frontier. Within these regions, waves again provide the only effective coupling between particles of the same and of different species, and give rise to anomalous transport effects; the basic physics of these regions requires an understanding of the wave-particle interactions present.

Thus it is important to characterise the waves and turbulence: this is the objective of the Cluster STAFF measurements. Four point measurements will allow, for the first time, a clear separation of spatial and temporal effects. A major consideration for wave observations in a fast-flowing medium is the Doppler effect. Waveform data from four spacecraft in a tetrahedral configuration allow correction for this effect when the wavelength is comparable with the inter-spacecraft separation. On the other hand, when the wavelength is small compared to the inter-spacecraft separation, the determination of the wave normals on the four separate spacecraft may yield information about the source location. To understand turbulence it is important to measure over a frequency range wide enough to determine any cut-off frequency; instrumentation has sometimes been inadequate for this purpose on earlier missions. Earlier missions have been even less adapted to investigate spatial wavenumber spectra. Furthermore, some geophysically important regions have been rather neglected: for example, the high altitude cusp has been visited only by the HEOS spacecraft.

1.2 Hardware Overview

The STAFF experiment comprises a boom-mounted three-axis search coil magnetometer to measure magnetic fluctuations in the frequency range 0.1 Hz - 4 kHz, a preamplifier and an electronics box that houses the two complementary data-analysis packages: a digital Spectrum Analyser, and an on-board waveform unit.

STAFF is one of the five experiments of the Wave Experiment Consortium (WEC). The STAFF team includes scientific and hardware contributions from a number of institutes, as shown in Table 1.

LPP (previously CETP)	STAFF co-ordination (PI + technical manager) manufacturing and testing of: search coil, magnetic waveform unit, calibration check-out software support to integration and testing data analysis
LESIA- Meudon	manufacturing and testing of the spectrum analyser check-out software support to integration and testing data analysis
LPCE-Orléans	design, calibration and tests of the filters data analysis, development of dedicated scientific tools
SSD-ESTEC	manufacturing of the filters
Charles University, Prague, Czech Republic	Development of dedicated scientific tools (PRASSADCO), data analysis
LPG-Grenoble	theoretical support for data analysis relationship with ground-based measurements
Co-Is from other institutes: LPCE, Orléans, France Sussex University, UK University of Iowa, USA IRF, Uppsala, Sweden Sheffield University, UK	link between STAFF and the other WEC experiments P.M.E. Décréau M.P. Gough D.A. Gurnett, J. Pickett G. Gustafsson, M. André H.St.C. Alleyne

Table 1: Share of tasks

1.2.1 The search coil sensors and the preamplifier

Three orthogonal sensors are mounted on a rigid boom away from the spacecraft body. Two sensors, B_y and B_z , are in the spin plane, while the third one, B_x , is parallel to the spacecraft spin axis (note that the science data products have different definition for axes). Each sensor consists of a high permeability core embedded inside two solenoids. The main winding has a very large number of turns, its resonant frequency is within the expected 3 dB bandwidth. The frequency response of the main winding is flattened by a secondary winding through a flux feedback effect, in the frequency range 40-4000 Hz. Furthermore, the secondary winding is used as a calibration loop on which an external AC signal is applied through a calibration network included in the pre-amplifiers. Example of the transfer function and the experiment sensitivity are given in Figure 1 below.

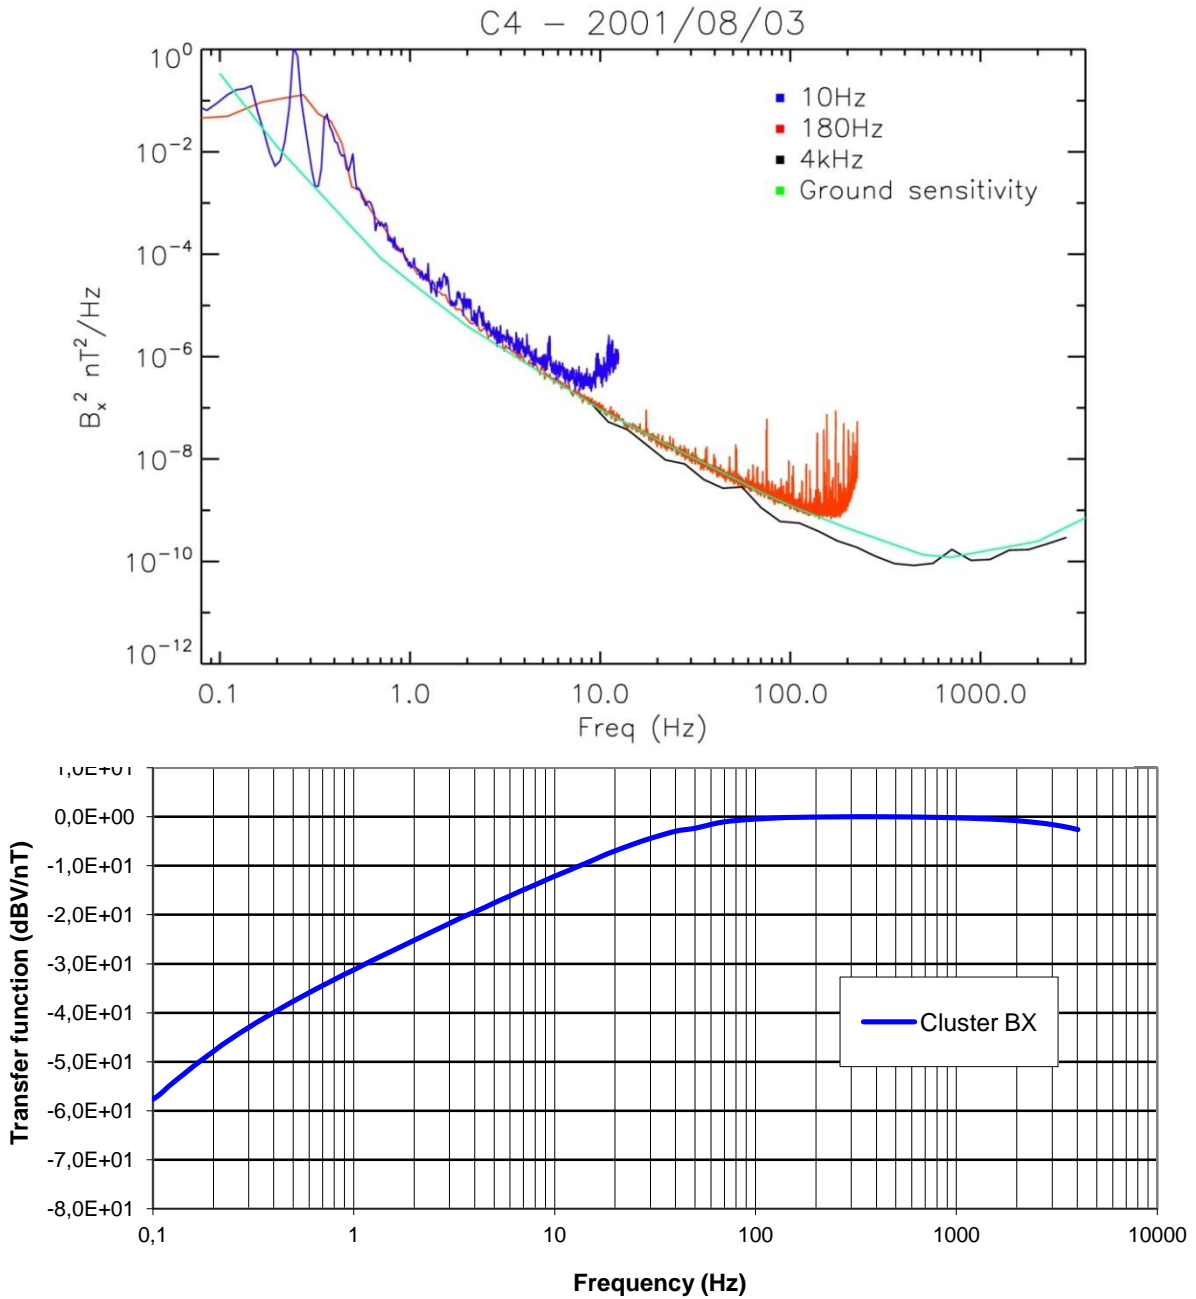


Figure 1: Top : STAFF sensitivity : comparison between ground measurements in a quiet site (green) and in flight measurements (blue/red), when no natural signal was detected

Bottom : STAFF transfer function for one component.

The 3 channels pre-amplifier unit is located on the spacecraft deck. The low-power-consumption pre-amplifiers have a low-noise input stage and high input impedance

since they are connected to the magnetic sensors which are characterised by a low DC resistance and a very high impedance in the vicinity of the resonant frequency. The dynamic range of the pre-amplifiers is about 100 dB, which allows to withstand the large voltage signals induced by the rotation of the spacecraft in the DC magnetic field, as well as the weak signals to be measured. A new pre-amplifier using hybrid technology has been developed that has been flown successfully for the first time on CASSINI (first launched on Cluster I). This technique has the advantages to include protection against radiation, together with the possibility of a thermal control of the pre-amplifier (when located outside the spacecraft body, which is not the case of Cluster II). Moreover, these pre-amplifiers are lighter than the traditional ones.

The output signals of the magnetic preamplifiers are sent to:

- (i) the magnetic waveform unit for analysis up to either 10 or 180 Hz,
- (ii) the spectrum analyser up to 4 kHz,
- (iii) the Wide Band Data unit, also up to 4 kHz,
- (iv) the EFW experiment for use in one of the EFW internal burst memory modes,
- (v) the Electron Drift Experiment (EDI).

1.2.2 The magnetic waveform unit

The magnetic waveform unit consists of three sections to fulfil different filtering and wave form digitalisation, data output interface and on-board calibration.

The three magnetic components B_x , B_y , B_z , at the output of the search coil pre-amplifier are filtered simultaneously either in 0-10 Hz or in 0-180 Hz bandwidth.

The low-pass filters are seventh order. They are specified with an accuracy of 1% in amplitude and 1° in absolute phase. The sampling frequency is 2.5 times the 3dB point frequency of the filters. So, the rejection of the aliasing components is at least 40 dB. The filters are the same as those used in the E-field experiment to optimise the E/B waveforms correlation.

The filtered signals are applied, after the selection of the bandwidth, to three sampling and hold devices synchronised by DWP, then digitized and sent to the DWP experiment. The same synchronisation signal is sent to EFW. The selection between the two bandwidths is made by the DWP DPU according to the telemetry rate. The filtered signals are simultaneously sampled in a large dynamic range within a very short sampling time of about 10 μ s in order to guarantee a relative error of less than one degree at 180 Hz between the three components. The sampling signal, provided by DWP, is common between STAFF and EFW experiments to allow the best simultaneous analysis of the five available components of the electromagnetic waves.

Then the samples are digitized by a real 16-bit analogue-to-digital converter and transmitted to the DWP experiment through one parallel interface.

The 16-bits digitization advantage is a simultaneous analysis of natural waves of a few $\text{pT}\cdot\text{Hz}^{-1/2}$ and the large signal induced by the rotation of the spacecraft in the

environmental DC field, up to 100 nT at 0.25 Hz. With such a dynamic range, there is no trouble shoot to expect at the inversion of the DC magnetic field at the magnetopause.

Due to the telemetry limitation, a reduction of the dynamic data range from 16 to 12 bits is performed inside DWP (see §1.3).

1.2.3 The spectrum analyser

The spectrum analyser is designed to perform the complete auto and cross correlation matrix of 5 sensor channels over a frequency range of 8-4000 Hz at a high rate.

The "front-end" of the analyser is analogue. It consists of 15 variable-gain amplifiers and 15 anti-aliasing filters. The analysis band of 8-4000 Hz is divided into three logarithmically distributed frequency sub-bands, each with a maximum frequency eight times the minimum frequency. Distinct band pass filters are applied to each 3 sub-bands and each 5 sensor channels. For each sub-band there are 3 controlled-gain amplifiers (AGC): one for Bx channel (parallel to the spin axis) and one for each couple of spinning components (By, Bz and Ey, Ez respectively). The AGC amplifiers normalise the output signals to an optimum level for digitization. For spin-plane sensors (Ey, Ez, By, Bz) the total power from the 2 sensors is used for the normalisation because the sensor outputs will have to be "de-spun" later (see below).

The dynamic range of the normalisation is 80 dB, which, combined with the 45-50 dB dynamic range of the digital processing, gives a total instrument dynamic range order of 120 dB. Separate high-pass and low-pass filters ensure that the gain normalisation is only performed for signal components with frequencies within the sub-band. It will be further analysed digitally, and more important, will prevent "aliasing", i.e. unwanted contribution from frequency components above the Nyquist frequency (sample frequency/2).

The 15 amplifier outputs are multiplexed together to a single 8-bit flash A/D converter. They are digitized in a rapid-fire mode by groups of 5 or 10, as needed at a 16 kHz rate. The 9 AGC gain-control signals are digitized separately to be included in the telemetry packets, as a multiplicative factor for the results of the subsequent digital filtering.

1.2.4 In flight calibration

One sequence of calibration can be commanded by the DWP to calibrate in flight the STAFF experiment (the magnetic wave sensors, the waveform unit and the spectrum analyser), either at normal bit rate or at high bit rate.

STAFF calibrations take place, once per orbit close to a so called BM3 period (dump of experiments internal burst memories).

The calibration sequence duration is about 6 minutes at normal bit rate and 2 minutes at high bit rate.

Two kinds of calibration signals are generated in the magnetic waveform unit: either two simultaneous sinusoidal signals at around 7 Hz and 100 Hz, or a pseudo-random noise signal covering 4 kHz bandwidth. Eight different steps in amplitude are available to cover an 80 dB dynamic range. The calibration signal called REF is transmitted in the telemetry packets, together with the signals coming from the output of the STAFF analysers. It is used as a reference signal for the phase measurements between the different channels. It allows to identify the origin of an anomaly and thus to recalibrate the experiment. The Calibration mode is indicated by a status CAL ON (see 1.2.6).

1.2.5 Operational modes

Different operational modes are applied, mainly depending on the bit rate. A short description of these modes, for both the waveform and the spectrum analyser is given below. The STAFF modes are part of the WEC modes that are commanded and monitored by DWP.

Modes

The principle is to cover the full STAFF frequency range in all modes, but the methods are different depending on the bit rate. In Normal bit rate, the waveform data covers the 0.1 - 10 Hz frequency range, whereas the Spectrum Analyser covers the frequency range 8 Hz - 4 kHz, working in its 3 frequency bands. In High bit rate, the waveform data covers the 0.1 - 180 Hz frequency range, then in order to spare telemetry, the Spectrum Analyser only operates in its two upper frequency bands, from 64 Hz to 4 kHz.

For the waveform data, two combinations of commands can be sent, one is the sampling frequency rate which is a STAFF command, the other is whether a data compression is applied or not. This is an application software in the DWP experiment. The sampling frequency is either 25 Hz, with the 10 Hz low pass filter, in normal bit rate, or, 450 Hz, with the 180 Hz filter in high bit rate. One constraint is that STAFF and EFW must use the same sampling frequency as they are synchronised by DWP. The sampling rate is a sub multiple of the DWP clock the frequency of which is ~900 Hz, but slightly different. Its value is constant with time, but S/C dependant.

Cluster WEC (DWP) exact sampling frequency (Hz) derived from the DWP clock:

NBR:

(SC1)	25.0005833
(SC2)	25.0003611
(SC3)	25.0001667
(SC4)	25.0001667

HBR :

(SC1)	450.0105
(SC2)	450.0065
(SC3)	450.0030
(SC4)	450.0030

The STAFF waveform words are 16 bits (including status). Normally, due to telemetry limitations, DWP applies a compression algorithm to get 12 bits words (giving 912 bits per second). In emergency mode the 16 bit words are telemetered (see tables above). The principle is the same in high bit rate; with compression the needed telemetry is then 16320 bps.

Mode	Bit rate	Low pass filter	Compression	b/s
NM	Normal	10 Hz	Yes (12 bits)	928
BM	High Bit Rate	180 Hz	Yes (12 bits)	16480
EM NBR	Normal	10 Hz	No (16 bits)	1216
EMHBR	High Bit Rate	180 Hz	No (16 bits)	21760

Table 2 - STAFF Wave Form data Modes

For the Spectrum Analyser, the different modes are the combination of three parameters: the time resolution, the number of frequencies computed, and the number of wave components considered. Then each mode is a combination of these different parameters. The modes are defined to fulfil different scientific objectives, in the framework of two constraints, first the telemetry limitation, second the total WEC power limitation.

The "Normal Mode 1" is the basic mode in normal bit rate. The auto-spectra are averaged over 1s and the complete matrix over 4s for five components (25 coefficients). The other modes are variations of this.

In Normal Mode 1', the calculation is performed for only three components, either 3 x B (NM1'b) or Bx and 2x E (NM1'e). Only nine elements of the spectral matrix are computed (instead of 25). The mode NM1'b is used in time-sharing with NM1, during active Whisper modes. It allows saving telemetry.

In the Normal Modes 2, three of the five wave components are selected. The time resolution is 0.5 or 1s for the auto spectra and 1s for the cross spectra. Modes NM2b and NM2e are used in time-sharing.

In the Special Mode the time resolution is improved.

In the Emergency Mode, the five components are taken into account, with a lower time resolution, 2 and 4 seconds for the auto- and cross- spectra respectively. This reduction in time resolution, and thus in telemetry is intended to compensate for the increase due to the non compression of the wave form data.

In high bit rate, only the two highest frequency bands are analysed. In the Fast Modes the time resolution is 1s for the cross spectra and either 0.125 s or 0.25s for the auto-spectra. Here again five or three components can be considered. The different constraints, telemetry, Whisper active and low power are considered in the choice of the modes.

The STAFF SA modes are given in the tables below:

NORMAL MODE 1: NM1 (3 x B + 2 x E), secondary power = 1.75 W

Band	AUTO resolution	b/s	CROSS resolution	b/s	AGC resolution	b/s
A: 8-64 Hz	1.s	360	4.s	180	1.s	24
B: 64-512 Hz	1.s	360	4.s	180	1.s	24
C: 512-4096 Hz	1.s	360	4.s	180	1.s	24

Table 3.1 Total: 1696 bps (including status)

NORMAL MODES 1': NM1'b (3 x B) or NM1'e (2 x E + Bx)

Band	AUTO resolution	b/s	CROSS resolution	b/s	AGC resolution	b/s
A: 8-64 Hz	1.s	216	4.s	54	1.s	16
B: 64-512 Hz	1.s	216	4.s	54	1.s	16
C: 512-4096 Hz	1.s	216	4.s	54	1.s	16

Table 3.2 Total: 864 bps (including status)

NORMAL MODES 2: NM2 b (3 x B) or NM2 e (2 x E + Bx)

Band	AUTO resolution	b/s	CROSS resolution	b/s	AGC resolution	b/s
A: 8-64 Hz	1.s	216	1.s	216	1.s	16
B: 64-512 Hz	0.5s	432	1.s	216	0.5s	32
C: 512-4096 Hz	0.5s	432	1.s	216	0.5s	32

Table 3.3 In NM1 the Total data rate is always 1840 bps (including status)

SPECIAL MODE: SM (3 x B + 2 x E)

Band	AUTO resolution	b/s	CROSS resolution	b/s	AGC resolution	b/s
A: 8-64 Hz	1.s	360	2.s	360	1.s	24
B: 64-512 Hz	0.5s	720	2.s	360	0.5s	48
C: 512-4096 Hz	0.5s	720	2.s	360	0.5s	48

Table 3.4 Total: 3032 bps (including status)

EMERGENCY MODE: EM (3 x B + 2 x E)

Band	AUTO resolution	b/s	CROSS resolution	b/s	AGC resolution	b/s
A: 8-64 Hz	2.s	180	4.s	180	2.s	12
B: 64-512 Hz	2.s	180	4.s	180	2.s	12
C: 512-4096 Hz	2.s	180	4.s	180	2.s	12

Table 3.5 Total: 1120 bps (including status)

FAST MODE 1: FM1 (3 x B + 2 x E)

Band	AUTO resolution	b/s	CROSS resolution	b/s	AGC resolution	b/s
B: 64-512 Hz	0.125s	2880	1.s	720	0.125s	192
C: 512-4096 Hz	0.125s	2880	1.s	720	0.125s	192

Table 3.6 Total: 7600 bps (including status)

FAST MODE 2: FM2 (3 x B + 2 x E)

Band	AUTO resolution	b/s	CROSS resolution	b/s	AGC resolution	b/s
B: 64-512 Hz	0.25s	1440	1.s	720	0.25s	96
C: 512-4096 Hz	0.25s	1440	1.s	720	0.25s	96

Table 3.7 Total: 4528 bps (including status)

FAST MODES 3: FM3 b (3 x B) or FM3 e (2 x E + Bx)

Band	AUTO resolution	b/s	CROSS resolution	b/s	AGC resolution	b/s
B: 64-512 Hz	0.125s	1728	1.s	216	0.125s	128
C: 512-4096 Hz	0.125s	1728	1.s	216	0.125s	128

Table 3.8 Total: 4160 bps (including status) - STAFF Spectrum Analyser Normal Bit Rate Operation

In flight, the most often used modes are:

- in Normal Bit Rate, NM1 alternatively with NM'1b when Whisper is active.
- in Burst mode :FM1 or FM2, depending on the priority given to STAFF within WEC (one BM over 3 in average), again alternated with FM3b when Whisper is active.

The calibration mode calibrates both parts of the experiment. The different SA modes are tested during this sequence. The calibration mode operation is operated by remote control once per orbit and preferentially at the beginning of a data acquisition sequence, in connection with the S/C Burst Mode 3.

WHISPER MODE	STAFF-SA components	STAFF SA Mode Names
active	3 x B	NM1; FM1; FM3
passive	3 x B + 2 x E	NM1'b; FM3b

Table 4: Main STAFF SA modes as a function of Whisper experiment mode, active or passive.


1.2.6 Status word

The Status word provides information about the onboard operations and some key parameters needed in the STAFF ground data processing. There is in fact two status word in STAFF data :

- STAFF-SA status word : 1 to 9 characters described below.
- STAFF-SC status word : 1 to 14 characters described below.

STAFF-SC status word is present in DWF and CWF data files. It is not in CS files because it can change during the spectrum integration duration. STAFF-SA status word is present in AGC, SM, PSD and PPP data.

The status word is composed as follows:

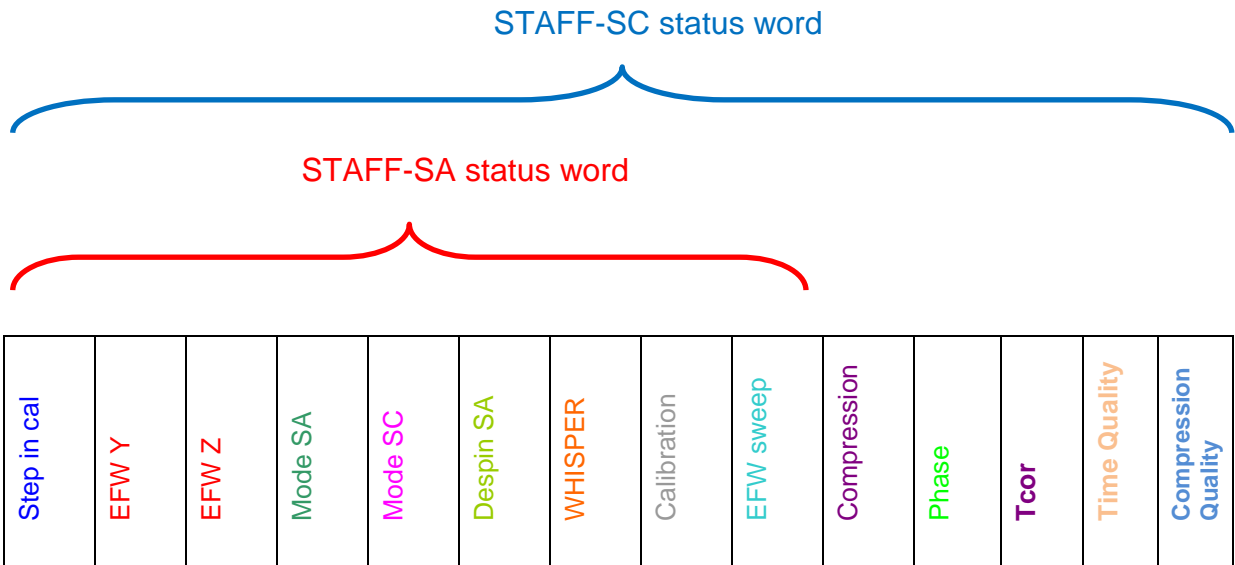

The value of each character is explained in the following table:

Description	Values	
	Min-max	Meanings

Step in cal	0-0	0: science mode		
		Step	Mode	
		Attenuation (dB)		
		1	CAL4	0
		2	CAL4	0
		3	CAL4	0
		4	CAL4	0
		5	CAL4	-13
		6	CAL4	-26
		7	CAL4	-39
		8	CAL4	-52
		9	CAL4	-65
		a	CAL4	-78
		b	CAL4	Gnd
		c	CAL3	0
		d	CAL3	-26
		e	CAL1	0
f	CAL2	0		
g	CAL1	-26		
h	CAL2	-26		
i	CAL1	-52		
j	CAL2	-52		
k	CAL2	Gnd		
l	CAL OFF redundant			
m	CAL2	-26		
n	CAL Off/On satellite			
o: after calibration, till reset or new calibration				
EFW Y boom pair	0-1	0: density mode off 1: density mode on		
EFW Z boom pair	0-1	0: density mode off 1: density mode on		
STAFF-SA mode description	0-f	Value	Mode	
		0	NM1	
		1	NM2e	
		2	NM2b	
		3	Illegal	
		4	Emergency	
		5	Special	
		6	NM1'e	
		7	NM1'b	
		8	FM1	
		9	FM3e	
		a	FM3b	
		b	Illegal	
		c	FM2	
		d	Illegal	
		e	Illegal	
		f	Passive	
STAFF-SC mode	0-1	0 : SC bandwidth 10 Hz 1 : SC bandwidth 180 Hz		
On-board despin (STAFF-SA)	0-1	0 : despin off 1 : despin on		

WHISPER transmitter	0-1	0: off 1: active
Calibration	0-1	0: off 1: active
EFW sweep progress	0-2	0: no scanning 1: scanning 2: non synchronised block
Compression	0-2	0: nominal 1: backup 2: no compression
Phase	0-Z	0: True sun pulse used in phase calculation. 1: Interpolated sun pulse used in phase calculation. 2: Suspect sun pulse used in phase calculation. N: Phase = -500. due to invalid sun pulse status or unable to find satisfactory sun pulse. R: Recovered phase value (Phase with 'N' status in DWF but recovered by interpolation by the calibration software. Used in CWF and CS but only seen in CWF). Z: Phase = -500. (Can't open the interpolated sun pulses' file). In all cases, if the reference phase is not found in SATT, a default mean value is used.
Tcor	0-1	0:no (no Tcor correction) 1:yes (Tcor correction)
Time Quality	0-1	0:interpolated time 1:block time
Compression Error		0 = no compression error 1 – 7 = error on 1 to 3 components in instrument frame: 1 error on Bx 2 error on By 3 error on Bx and By 4 error on Bz 5 error on Bx and Bz 6 error on By and Bz 7 error on Bx, By and Bz

Table 5: Status word description

E.g. A status values of 000f0100020100, means: science mode, density mode off for EFW Y and Z, SA mode = Passive, SC bandwidth = 10 Hz, SA despin off, Whisper transmitter off, Cal off, EFW not scanning, Sc compression = no compression, Phase calculation done with a True Sun Pulse, Tcor is applied, the time is interpolated and no compression error.

1.2.7 Data compression

Data are sampled into 16bits for the first record of each block, but for other records only the difference is kept, coded in 12bits. If the difference between two records is

too big, we may encounter compression errors. Fortunately we know on which bit the error occurs, which allows us to maximise it.

Three compression modes are available (see Status word character #10), and may lead to one or another bit to be wrong. The maximum error is then known, see the following table (where Delta is the difference between the current record and the previous one):

	Delta (16 bits)	Maximum Compression Error (TM counts)	Maximum Error (mV)
No Compression	0-65535	0	0
Normal Compression	0-2015	0	0
	2016-65535	1024	150
Backup compression	0-511	0	0
	512-1535	1	0.15
	1536-3587	2	0.3
	3588-7447	4	0.6
	7448-65535	1024	150

Table 6 : Data compression

The normal and backup compression are used respectively when we expect to measure “low” and “high” amplitude signals including large spin signals.

1.3 Data Processing Chain

1.3.1 On board data processing

1.3.1.1 STAFF wave form data processing (STAFF-SC)

DWP has an internal clock running at a fixed 900 Hz frequency. Pulses of this clock are counted by software which derives either a 25 Hz or a 450 Hz signal known as the WEC Sample Sync (WECSS). This controls STAFF Magnetic Waveform Analyser (SC) and EFW electric field sampling and ensures that sample taking is synchronised to this clock in order to facilitate further STAFF/EFW comparison.

DWP also performs the waveform compression for STAFF-SC from 16 bits to 12 bits words, in order to reduce the telemetry rate. The principle is to transmit at the beginning of each telemetry packet (1 packet = 1 second or 25 samples in NBR, 0.1 s or 45 samples in HBR) the full 16 bits word, and then the difference between the successive samples, coded on 12 bits in such a way that the dynamic of the experiment should be preserved even at boundary crossings. There are three possible modes selected by remote control: no compression, normal compression and backup compression. (see § 5.1.7 for modes and possible compression errors)

1.3.1.2 STAFF Spectrum Analyser data processing (STAFF-SA)

The digital processing of the sampled inputs is performed in three distinct steps:

- 1/ de-spin of the spin-plane sensor outputs,
- 2/ determination of the complex Fourier coefficients,
- 3/ calculation of the correlation matrices (see Fig. 6 in [1]).

Despin system:

The de-spinning operation involves processing of the two signals received by a pair of spinning dipole or search coils to make them appear as signals received by non-rotating sensors. This transformation is necessary because the spacecraft spin period is generally not long compared to the measurement times.

Each time samples are taken of the spinning sensor outputs; they will undergo the following calculations:

$$\begin{aligned}V_a &= V_y \cdot \cos(m) + V_z \cdot \sin(m) \\V_b &= V_z \cdot \cos(m) - V_y \cdot \sin(m)\end{aligned}$$

where V_y and V_z are the spinning outputs, m the instantaneous angular position of the V_y sensor, and V_a and V_b the expected outputs for non-spinning antennas at $m=0^\circ$ and $m=90^\circ$. It is foreseen that the reference for m will be the sun pulse and that m will be derived from the spin rate signals, both spacecraft-supplied on board.

Fourier Coefficients:

The Fourier coefficients are determined using appropriate algorithms which are extensions of the Remez exchange algorithm. Each of the three-octave bands is divided into 9 logarithmically-spaced channels. The relative (3 dB) bandwidth is 26 % of its central frequency.

The required analysis times are variable, depending on the frequency sub-bands, ranging from 0.016 to 1.0 s.

Correlation matrices:

The auto- and cross-spectra are calculated by complex multiplication of the complex Fourier coefficients and accumulation of the products. The analyser stores all of the results during one measurement cycle of 4 s (in normal operating mode). 540 auto-spectral coefficients are stored. This corresponds to 5 real sensor amplitudes per frequency, 27 frequencies, and 4 sub-cycles of 1s each. The number of stored cross-spectral coefficients is 540, i.e., 20 off-diagonal matrix elements and 27 frequencies. Only one set of cross-correlation components are transmitted each 4 s in the normal mode.

All of these numbers are stored in the analyser as 40-bit numbers, representing power. Out of these 40 bits, 24 are significant in the final results of the auto-

spectrum calculations. They represent a dynamic range of $10 \cdot \log_{10}(2^{24}) = 72 \text{ dB}$. To optimise use of allocated telemetry and to simplify interfaces with the DWP, the 24-bit amplitudes N are logarithmically compressed in the wave analyser before the transfer to the DWP. The result of this compression for an amplitude N_{in} is

$$N_{in} = 2^{(E-3)}(8+M)$$

where 5 bits are used to represent the exponent E and 3 bits for the mantissa M . The total possible dynamic range for this data presentation is 96 dB, while the average relative amplitude resolution is 0.38 dB.

The cross-spectral coefficients are sent to the DWP with the same compression technique. But only 4 bits will be put into the telemetry bit stream.

1.3.2 Ground processing


TED software produced by DWP team is applied to WEC raw data provided by ESOC in order to get level 0 files. At this level, STAFF science data are extracted in two separated datasets (STAFF-SC and STAFF-SA) and time tagged thanks to the WEC House Keeping data and TED.

The TED version 2.5 is run to extract STAFF SC data files, in order to get the best time accuracy by activating the option that uses TCOR files in order to reach a time accuracy of the order of some microseconds, which is important mainly for wave data in high bit rate for inter spacecraft comparisons.

The comments which follow only concern a future utilisation of STAFF waveform data: In the case of simultaneous utilisation of EFW waveform, the user should verify that the same option has been chosen for those concerned data set production by EFW team. As there are some gaps in TCOR files, all data are not time-corrected. The twelfth character of the STAFF status word indicates if TCOR files are applied or not.

For STAFF SA one uses TED version 2.4.3 (an accuracy of some μs is not needed as the best time resolution of STAFF SA in HBR is 125 ms).


The decommutation, to go from level 0 to level 1, is done by software written in LPP, previously CETP. Data are transcribed to files of 16 bits words with regard to the compression. See documents [2] and [3] for details.

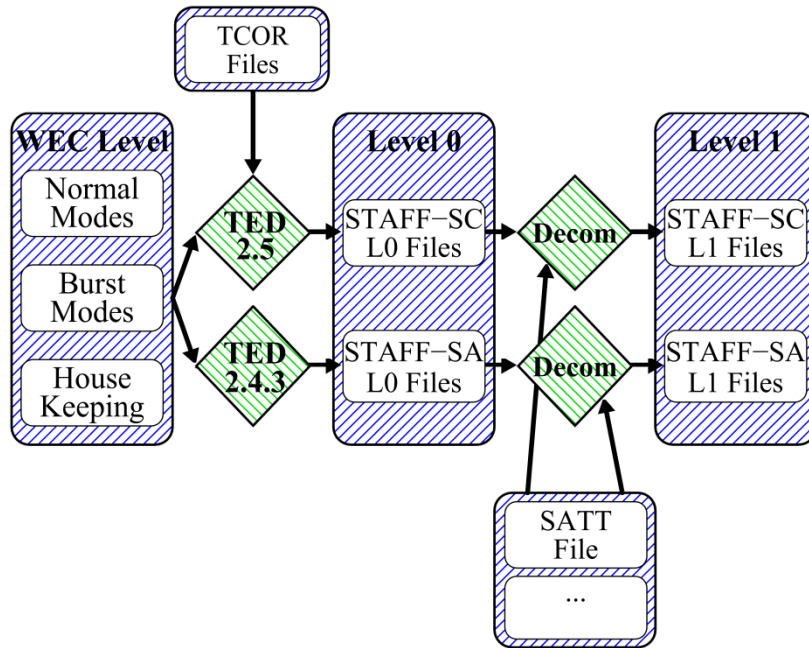

For STAFF-SC data, the spin phase is computed from the Sun Reference Pulse (see Annex 1 document [4]) and added in the Level 1 file.

The spin phase is the rotation angle of the half-plane defined by the $+Z_{SR}$ and $+X_{SR}$ Spin Reference System axes around the maximum principal axis of inertia ($+Z_{SR}$) from the time when the Sun direction was contained in this plane.

1.3.3 Science processing

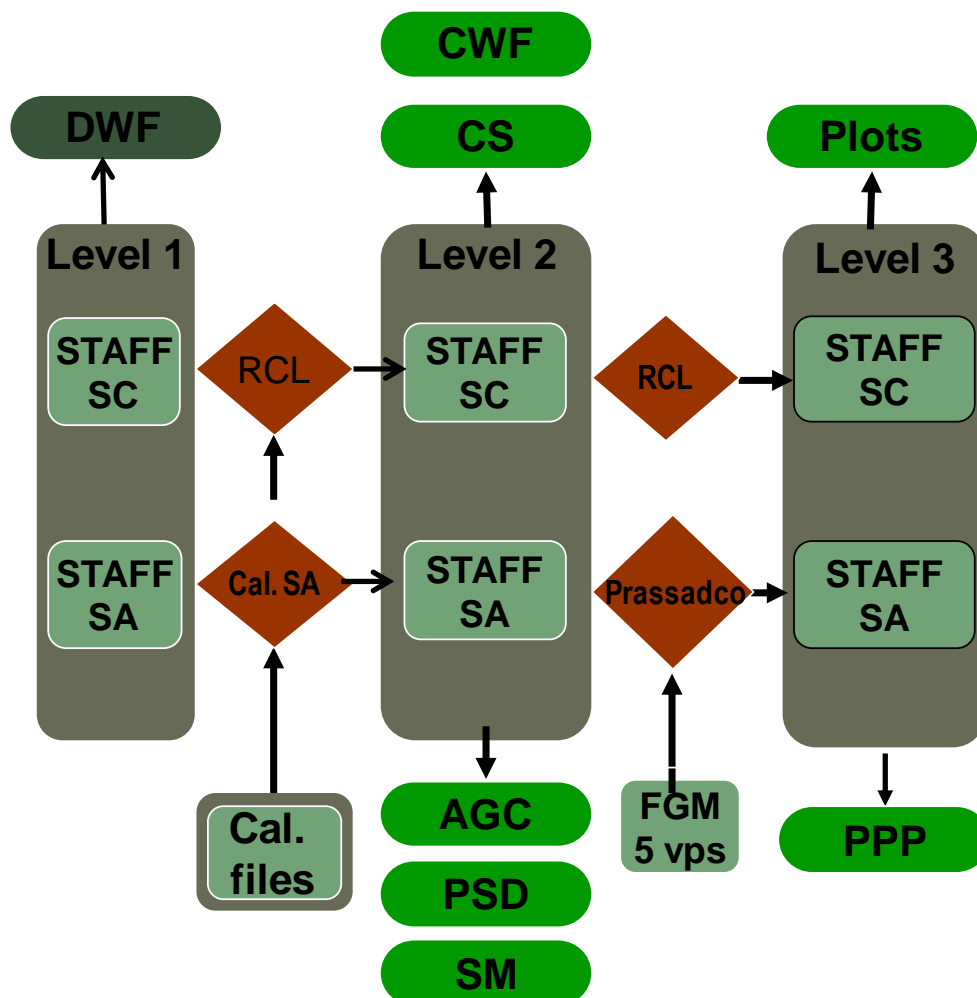

The data processing routines and the related science data products (those delivered to the CAA are indicated in red).

1.3.3.1 STAFF-SC

STAFF-SC data are calibrated with the FORTRAN code developed by Patrick Robert. These routines are part of the Roproc Command Language (RCL) (see [5]) that calibrates, computes and plots different types of products. The output data are formatted into a proprietary format called Roproc File Format (RFF) and graphical products are formatted into Postscript, that can be further transformed into png format.

RCL takes L1 files and converts them into RFF files. These files are self-documented files which include metadata. From this step, it is possible with RCL to perform calibration, filtering, coordinate system transformations, time checking and other processing operations whose results (L2 files) can be translated into CEF.

Value added products are computed from L2 files: spectrograms and polarisation files (L3 files) which are displayed in Postscript files and accessible via a web interface (<http://cluster.lpp.polytechnique.fr/accueil/framepa.html>).

1.3.3.2 STAFF-SA

The calibration procedure for the STAFF-SA is fully described in [6]. This procedure is performed by the C-code n1toN2sa, version 2002-01-25, developed by Y. de Conchy and L. Sitruk at LESIA. The calibrated STAFF-SA data are then processed by the IDL code PRASSADCO (PRopagation Analysis of STAFF-SA Data with COherency tests) developed by O.Santolik (see [7]), in order to get the polarisation parameters.

2 DATA PROVISION – GENERAL CONVENTIONS

2.1 Formats

There are two types of products:

- ASCII data files are delivered in CEF-2.0 format as described in the CEF document [8].
- Binary graphical products are delivered as PNG files.

2.2 Standards

2.2.1 Time standards

Both STAFF-SC and STAFF-SA products are time series data, every event is tagged by a time given in ISO format i.e. CCSDS ASCII time standard tag (yyyy-mm-ddThh:mm:ss.mmmZ).

2.2.2 Coordinate systems


Level 1 STAFF-SC products are delivered in the STAFF Sensor WEC6 Reference Frame (SSW6RF).

Level 2 STAFF-SC products are delivered in GSE coordinate system.

Level 2 STAFF-SA products are delivered in SR2 system.

Level 3 STAFF-SA PPP products are delivered in the MFA reference frame.

STAFF antenna reference frame are represented on figure below.

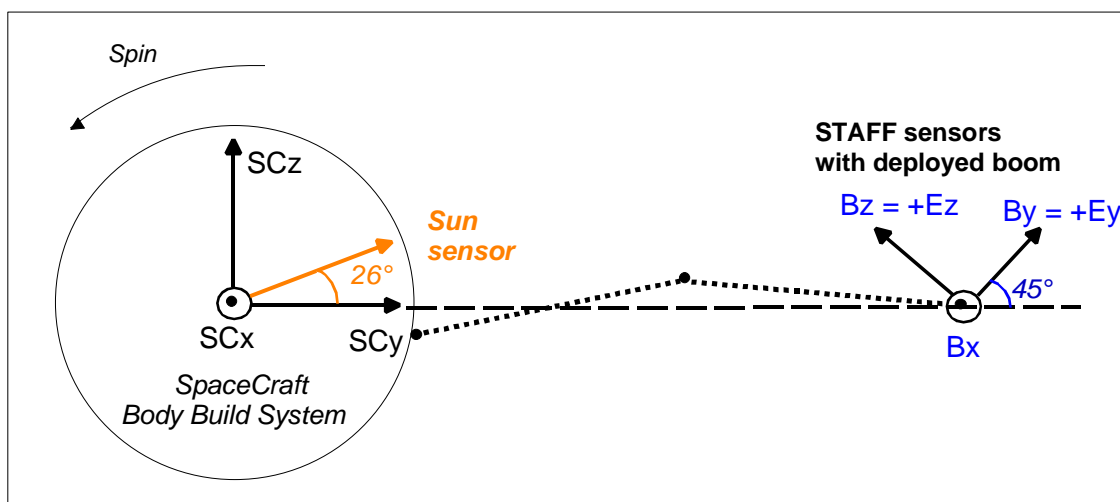

2.2.3 Units

Level 1 STAFF-SC DWF waveform is given in telemetry counts.

STAFF-SC CWF (calibrated waveform) are given in nT.

STAFF-SC CS (calibrated complex spectra) are given in nT.

STAFF-SA PSD (Power Spectral Density) parameters are given in $\text{nT}^2\text{Hz}^{-1}$ for the magnetic components (B_x^2, B_y^2 and B_z^2) and in $\text{mV}^2\text{m}^{-2}\text{Hz}^{-1}$ for the electric components (E_x^2 and E_y^2).

STAFF-SA SM (Spectral Matrix) parameters are given in $\text{mV}^2\text{m}^{-2}\text{Hz}^{-1}$ units.

$\text{nT}^2\text{Hz}^{-1}$ for the magnetic components, in $\text{mV}^2\text{m}^{-2}\text{Hz}^{-1}$ for all components for the electric components as for PSD and in $\text{nTmVm}^{-1}\text{Hz}^{-1}$ for the cross products components B, E.

STAFF-SA AGC (Automatic Gain Control) parameters are given in $\text{nT}^2\text{Hz}^{-1}$ for the magnetic AGC (B_z, B_{xy}) and in $\text{mV}^2\text{m}^{-2}\text{Hz}^{-1}$ the Electric AGC (E_{xy}).

In addition, the factor of conversion for all components in SI units is given.

7 parameters are given for STAFF-SA PPP (Polarization and Propagation Parameters). Polar and azimuthal angles of the direction of propagation are given in degrees. Ellipticity of the polarization and the degree of polarization in the polarization plane are unitless. The sum of the three magnetic auto-power spectra is given in $\text{nT}^2\text{Hz}^{-1}$. The parallel component of the Poynting vector normalized by its standard deviation is unitless. Finally the sum of the two electric auto-power spectra is given in $\text{mV}^2\text{m}^{-2}\text{Hz}^{-1}$.

2.3 Production Procedures

2.3.1 STAFF-SC

The STAFF-SC products (waveform, calibrated complex spectra and plots) are created from the L1 database (see 3.3) which is updated every time WEC data are provided by ESA. A filter is applied that converts level 1 and level 2 products to CEF.

2.3.2 STAFF-SA

SM and PSD data are extracted from the L2 database which is updated every time WEC data are provided by ESA. These data are calibrated into physical units once by our calibration software and stored in an IDL database by PRASSADCO.

IDL stored data are then formatted into CEF.

PRASSADCO transfers the SM data into MFA coordinate system with help of attitude and FGM 5VPS data extracted from CAA database. Then PRASSADCO calculates the polarization and propagation parameters and stores them in an IDL database. IDL stored data are then formatted into CEF.

2.4 Quality Control Procedures

Every CEF file produced is checked by the CAA tool CEFpass to satisfy the CEF requirements. The filters to generate products in CEF include the check by CEFpass.

The procedure to generate CEF produces a matrix that indicates, for a month of processed data, the number of files generated. It is compared with the input data files. In case of problem, a visual investigation is performed.

The procedure permits also to create empty files.

Before any version update, the amount of data produced by the new version is compared to the latest version. It should correspond at last to the same set of data.

2.4.1 STAFF-SC

With regard to the quality of data calibration, we started a comparison work between STAFF-SC data and FGM data. This will continue and is part of the cross-calibration activities

2.4.2 STAFF-SA

We intend to develop an IDL code which will read both the original STAFF-SA data and the CEF STAFF-SA data (the routines to read the CEF STAFF-SA data are being developed by CAA) and compare them. Then, using the appropriate CEF routines, we will also compare the STAFF-SA data with the STAFF-SC, EFW and WHISPER data, in the frequency ranges where those experiments overlap. This is the purpose of cross-calibration activities.

2.5 Delivery Procedures

For both STAFF-SC and STAFF-SA products, a dedicated Linux PC has been installed (*lantana.lpp.polytechnique.fr*). This machine runs routinely the described processing chain and opens a secured connection to ESTEC each time a set of products is ready. Data are transferred to ESTEC via secured FTP (SFTP) to the dedicated machine (*caa.estec.esa.int*).

3 DATA PROVISION – SPECIFIC DESCRIPTIONS

3.1 Level 1 Data – SC - Decommutated Wave Form (DWF)

3.1.1 Format: CEF

3.1.2 Standard: cf 2.2.

3.1.3 Production Procedure: cf 2.3.1.

3.1.4 Quality Control Procedure: cf 2.4.1

3.1.5 Delivery Procedure

Secured ftp from LPP (lantana.lpp.polytechnique.fr) to ESTEC (caa.estec.esa.int).

3.1.6 Product Specification

One CEF file per day, per satellite and per mode (NBR or HBR) is produced. This CEF file contains the Decommutated Wave Form of the Magnetic Field (level 1) and other variables or constant data (constant for one given file) described below. Data are given in the instrument coordinate system 'SSW6RF', standing for "STAFF Sensor WEC6 Reference Frame".

3.1.7 Dataset metadata description

3.1.7.1 NBR mode

The detached dataset header is called: **C1/C2/C3/C4_CH_STA_DWF_NBR.ceh**.

In this header, only the static parameters (global metadata, support data and data themselves description) are included.

Example of the **global metadata** keywords for C1_CP_STA_DWF_NBR are:

- DATASET_ID= C1_CP_STA_DWF_NBR
- DATA_TYPE= "CP"
- DATASET_TITLE = "Magnetic Field Waveform – uncalibrated (25 Hz sampling)"
- CONTACT_COORDINATES =
"Patrick CANU>PI>Patrick.Canu@lpp.polytechnique.fr"
"Nicole CORNILLEAU-WEHRLIN>Deputy-PI>
nicole.cornilleau@lpp.polytechnique.fr"

- "Rodrigue Piberne>Archive Manager>rodrigue.piberne@lpp.polytechnique.fr"DATASET_DESCRIPTION = "This dataset contains 3.99990667E-02s resolution measurements of the magnetic field Decommutated WaveForm (DWF) from the STAFF-SC instrument in NBR mode on the Cluster C1 spacecraft. This product is given in the STAFF Sensor WEC6 Reference Frame (SSW6RF)."
- PROCESSING_LEVEL = "Uncalibrated"
- TIME_RESOLUTION = "3.99990667E-02"
- MIN_TIME_RESOLUTION, same as TIME_RESOLUTION.
- MAX_TIME_RESOLUTION, same as TIME_RESOLUTION.

Note: The time resolution values given in the headers are more precise and satellite dependent.

- DATASET_CAVEATS = "*C1_CQ_STA_DWF_NBR_CAVEATS. DATASET VERSION HISTORY. All versions: Use the TED software, provided by the Sheffield DWP group, with TCOR option used for a maximum UT time precision every second. S/C HK used to calculate the phase are not corrected by TCOR. The maximum error induced is 0.2 degree, including time around the leap second. Version 03 : All the headers have been updated (laboratory name and email). Introduction of a new header file (Dataset). For each data point time inside a on-second data block, each sample has been interpolated to insure a continuous sampling rate. The phase has been re-calculated for each point inside each one-second block. Version 04 : Addition of data necessary for CWF data. Correction of the time interpolation and of the backward time problem. The Maximum Compression Error information has been removed from the variables (MaxCompError_xyz_Instrument__C[n]_CP_STA_DWF_NBR) and added to the status (cf. User Guide). Version 05 : Some support data fields were moved to the FILE_CAVEATS section."

Then, the metadata for the **Support variables** are

&Time which is the time index. Its properties are:

- CATDESC = "Interval centred time tag"
- DELTA_MINUS = "1.9999533E-02"
- DELTA_PLUS = "1.9999533E-02"
- FIELDNAM = "UT Time"
- FILLVAL = 9999-12-31T23:59:59.999999Z
- LABLAXIS = "UT"
- PARAMETER_TYPE = "Support Data"
- SI_CONVERSION = "1.0>s"
- SIGNIFICANT_DIGITS = 27
- SIZES = "1"
- UNITS = "s"
- VALUE_TYPE = ISO_TIME

Originally, the Waveform data are separated in blocks or windows. Each block composed of several measurements (25 in Normal Bit Rate) covers 1s of

measurement. The block is time tagged by TED and then split into individual measurements.

&Status which is a word of ASCII characters, each depending on one different factor

- CATDESC = "STAFF-SC Status"
- DEPEND_0 = Time__C1_CP_STA_DWF_NBR
- FIELDNAM = "STAFF-SC Status"
- FILLVAL = ZZZZZZZZZZZZZZ
- LABEL_1 = "Status"
- LABLAXIS = "Status"
- PARAMETER_TYPE = "Support_Data"
- PARAMETER_CAVEATS = "We cannot certify the 9th character (EFW)"
- QUALITY = 1
- SIGNIFICANT_DIGITS = 14
- SIZES = 1
- UNITS = "unitless"
- VALUE_TYPE = CHAR

&Phase_Angle_SC_C1_STA_DWF_NBR:

- CATDESC = "Phase Angle"
- COORDINATE_SYSTEM = "SC"
- DEPEND_0 = Time__C1_CP_STA_DWF_NBR
- FIELDNAM = "Phase Angle"
- FILLVAL = -500.00
- LABEL_1 = "Phase Angle"
- LABLAXIS = "Phase Angle"
- PARAMETER_TYPE = "Support_Data"
- PARAMETER_CAVEATS = "Phase derived from Sun Pulse measurement: can be interpolated, see STATUS"
- QUALITY = 3
- SI_CONVERSION = "1.0>degree"
- SIGNIFICANT_DIGITS = 6
- SIZES = 1
- UNITS = "degree"
- VALUE_TYPE = FLOAT
-

&Misalignment_Matrix_C1_CP_STA_DWF_NBR

- CATDESC = "C1 transformation from STAFF real instrument frame to the theoretic orthogonal frame linked to the instrument."
- COORDINATE_SYSTEM = "Instrument"
- DATA = 1.0000, 0.0000, 0.0000, 0.0000, 1.0000, 0.0000, 0.0000, 0.0000, 1.0000
- ENTITY = "Transformation"
- FIELDNAM = "Misalignment_Matrix"

- FILLVAL = 1.E30
- FRAME = "Instrument"
- LABEL_1 = "L*_C1","L*_C2","L*_C3"
- PARAMETER_TYPE = "Support_Data"
- PROPERTY = "Coordinate_rotation"
- QUALITY = 0
- REPRESENTATION_1 = "x","y","z"
- REPRESENTATION_2 = "x","y","z"
- SI_CONVERSION = "1>unitless"
- SIGNIFICANT_DIGITS = 5
- SIZES = 3, 3
- TENSOR_ORDER = 2
- UNITS = "unitless"
- VALUE_TYPE = FLOAT

&Minimum_volt_range__C1_CP_STA_DWF_NBR

- CATDESC = "Minimum Volt range"
- DATA = -5.00
- FIELDNAM = "Minimum_volt_range"
- FILLVAL = -9.99
- PARAMETER_TYPE = "Support_Data"
- SI_CONVERSION = "1>V"
- SIGNIFICANT_DIGITS = 3
- UNITS = "V"
- VALUE_TYPE = FLOAT

&Maximum_volt_range__C1_CP_STA_DWF_NBR

- CATDESC = "Maximum Volt range"
- DATA = 5.00
- FIELDNAM = "Maximum_volt_range"
- FILLVAL = -9.99
- PARAMETER_TYPE = "Support_Data"
- SI_CONVERSION = "1>V"
- SIGNIFICANT_DIGITS = 3
- UNITS = "V"
- VALUE_TYPE = FLOAT

&TM_range_min__C1_CP_STA_DWF_NBR

- CATDESC = "Minimum telemetry range in TM counts"
- DATA = 0
- FIELDNAM = "TM_range_min"
- FILLVAL = -1
- PARAMETER_TYPE = "Support_Data"
- SI_CONVERSION = "1.52590218967E-4>V"
- SIGNIFICANT_DIGITS = 1

- UNITS = "TM counts"
- VALUE_TYPE = INT

&TM_range_max__C1_CP_STA_DWF_NBR

- CATDESC = "Maximum telemetry range in TM counts"
- DATA = 65535
- FIELDNAM = "TM_range_max"
- FILLVAL = -99999
- PARAMETER_TYPE = "Support_Data"
- SI_CONVERSION = "1.52590218967E-4>V"
- SIGNIFICANT_DIGITS = 5
- UNITS = "TM counts"
- VALUE_TYPE = INT

Data themselves:

&The Magnetic Field Decommutated WaveForm:

B_vec_xyz_Instrument__C1_CP_STA_DWF_NBR:

- CATDESC = "Cluster C1, NBR Magnetic Field Decommutated WaveForm"
- COMPONENT_DESC = "Cartesian xyz"
- COORDINATE_SYSTEM = "Instrument"
- DEPEND_0 = Time__C1_CP_STA_DWF_NBR
- ENTITY = "Magnetic_Field"
- FIELDNAM = "Cluster C1, NBR Magnetic Field Decommutated WaveForm"
- FILLVAL = -999
- FLUCTUATIONS = "Waveform"
- FRAME = "Instrument>xyz "
- LABEL_1 = "Bx","By","Bz"
- LABLAXIS = "Decommutated Magnetic Field Waveform"
- PARAMETER_TYPE = "Data"
- PARENT_DATASET_ID = C1_CP_STA_DWF_NBR
- PROPERTY = "Vector"
- QUALITY = 3
- REPRESENTATION_1 = "x","y","z"
- SI_CONVERSION = "1.52590218967E-4>V"
- SIGNIFICANT_DIGITS = 5
- SIZES = 3
- TENSOR_ORDER = "1"
- UNITS = "TM counts"
- VALUE_TYPE = INT

3.1.7.2 HBR mode

The detached dataset header is called: **C1/C2/C3/C4_CH_STA_DWF_HBR.ceh.**

In this header, only the static parameters (global metadata, support data and data themselves description) are included.

Example of the **global metadata** keywords for C1_CP_STA_DWF_HBR are:

- DATASET_ID= C1_CP_STA_DWF_HBR
- DATA_TYPE= "CP"
- DATASET_TITLE = "Magnetic Field Waveform – uncalibrated (burst; 450 Hz sampling)"
- CONTACT_COORDINATES =
"Patrick CANU>PI>patrick.canu@lpp.polytechnique.fr"
"Nicole CORNILLEAU-WEHRLIN>Deputy-PI>
nicole.cornilleau@lpp.polytechnique.fr"
"Rodrigue Piberne>Archive Manager>rodrigue.piberne@lpp.polytechnique.fr"
- DATASET_DESCRIPTION = "This dataset contains 0.22221704E-02s resolution measurements of the magnetic field Decommutated WaveForm (DWF) from the STAFF-SC instrument in HBR mode on the Cluster C1 spacecraft. This product is given in the STAFF Sensor WEC6 Reference Frame (SSW6RF)."
- PROCESSING_LEVEL = "Uncalibrated"
- TIME_RESOLUTION = "0.22221704E-02s"
- MIN_TIME_RESOLUTION, same as TIME_RESOLUTION.
- MAX_TIME_RESOLUTION, same as TIME_RESOLUTION.

Note: The time resolution values given in the headers are more precise and satellite dependent.

- DATASET_CAVEATS = "*C1_CQ_STA_DWF_HBR_CAVEATS. DATASET VERSION HISTORY. All versions: Use the TED software, provided by the Sheffield DWP group, with TCOR option used for a maximum UT time precision every second. S/C HK used to calculate the phase are not corrected by TCOR. The maximum error induced is 0.2 degree, including time around the leap second. Version 03 : All the headers have been updated (laboratory name and email). Introduction of a new header file (Dataset). For each data point time inside a 0.1s data block, each sample has been interpolated to insure a continuous sampling rate. The phase has been re-calculated for each point inside each 0.1s block. Version 04 : Addition of data necessary for CWF data. Correction of the time interpolation and of the backward time problem. The Maximum Compression Error information has been removed from the variables (MaxCompError_xyz_Instrument__C[n]_CP_STA_DWF_HBR) and added to the status (cf. User Guide). Version 05 : Some support data fields were moved to the FILE_CAVEATS section." "

Then, the metadata for the **Support variables** are

&Time which is the time index. Its properties are:

- CATDESC = "Interval centred time tag"
- DELTA_MINUS = "0.1111085E-02"
- DELTA_PLUS = "0.1111085E-02"
- FIELDNAM = "UT Time"
- FILLVAL = 9999-12-31T23:59:59.999999Z
- LABLAXIS = "UT"

- PARAMETER_TYPE = "Support Data"
- SI_CONVERSION = "1.0>s"
- SIGNIFICANT_DIGITS = 27
- SIZES = 1
- UNITS = "s"
- VALUE_TYPE = ISO_TIME

Originally, the Waveform data are separated in blocks (also called windows). Each block composed of several measurements (45 in High Bit Rate) covers 100ms of measurement. The block is time tagged by TED and then split into individual measurements.

&Status which is a word of ASCII characters, each depending on one different factor

- CATDESC = "STAFF-SC Status"
- DEPEND_0 = Time__C1_CP_STA_DWF_HBR
- FIELDNAM = "STAFF-SC Status"
- FILLVAL = ZZZZZZZZZZZZZZ
- LABEL_1 = "Status"
- LABLAXIS = "Status"
- PARAMETER_TYPE = "Support_Data"
- PARAMETER_CAVEATS = "We cannot certify the 9th character (EFW)"
- QUALITY = 1
- SIGNIFICANT_DIGITS = 14
- SIZES = 1
- UNITS = "unitless"
- VALUE_TYPE = CHAR

&Phase_Angle_SC_C1_STA_DWF_HBR:

- CATDESC = "Phase Angle"
- COORDINATE_SYSTEM = "SC"
- DEPEND_0 = Time__C1_CP_STA_DWF_HBR
- FIELDNAM = "Phase Angle"
- FILLVAL = -500.00
- LABEL_1 = "Phase Angle"
- LABLAXIS = "Phase Angle"
- PARAMETER_TYPE = "Support_Data"
- PARAMETER_CAVEATS = "Phase derived from Sun Pulse measurement: can be interpolated, see STATUS"
- QUALITY = 3
- SI_CONVERSION = "1.0>degree"
- SIGNIFICANT_DIGITS = 6
- SIZES = 1
- UNITS = "degree"
- VALUE_TYPE = FLOAT

&Misalignment_Matrix_C1_CP_STA_DWF_HBR

- CATDESC = "C1 transformation from STAFF real instrument frame to the theoretic orthogonal frame linked to the instrument."
- COORDINATE_SYSTEM = "Instrument"
- DATA = 1.0000, 0.0000, 0.0000, 0.0000, 1.0000, 0.0000, 0.0000, 0.0000, 1.0000
- ENTITY = "Transformation"
- FIELDNAM = "Misalignment_Matrix"
- FILLVAL = 1.E30
- FRAME = "Instrument"
- LABEL_1 = "L*_C1","L*_C2","L*_C3"
- PARAMETER_TYPE = "Support_Data"
- PROPERTY = "Coordinate_rotation"
- QUALITY = 0
- REPRESENTATION_1 = "x","y","z"
- REPRESENTATION_2 = "x","y","z"
- SI_CONVERSION = "1>unitless"
- SIGNIFICANT_DIGITS = 5
- SIZES = 3, 3
- TENSOR_ORDER = 2
- UNITS = "unitless"
- VALUE_TYPE = FLOAT

&Minimum_volt_range__C1_CP_STA_DWF_HBR

- CATDESC = "Minimum Volt range"
- DATA = -5.00
- FIELDNAM = "Minimum_volt_range"
- FILLVAL = -9.99
- PARAMETER_TYPE = "Support_Data"
- SI_CONVERSION = "1>V"
- SIGNIFICANT_DIGITS = 3
- UNITS = "V"
- VALUE_TYPE = FLOAT

&Maximum_volt_range__C1_CP_STA_DWF_HBR

- CATDESC = "Maximum Volt range"
- DATA = 5.00
- FIELDNAM = "Maximum_volt_range"
- FILLVAL = -9.99
- PARAMETER_TYPE = "Support_Data"
- SI_CONVERSION = "1>V"
- SIGNIFICANT_DIGITS = 3
- UNITS = "V"
- VALUE_TYPE = FLOAT

&TM_range_min__C1_CP_STA_DWF_HBR

- CATDESC = "Minimum telemetry range in TM counts"

- DATA = 0
- FIELDNAM = "TM_range_min"
- FILLVAL = -1
- PARAMETER_TYPE = "Support_Data"
- SI_CONVERSION = "1.52590218967E-4>V"
- SIGNIFICANT_DIGITS = 1
- UNITS = "TM counts"
- VALUE_TYPE = INT

&TM_range_max__C1_CP_STA_DWF_HBR

- CATDESC = "Maximum telemetry range in TM counts"
- DATA = 65535
- FIELDNAM = "TM_range_max"
- FILLVAL = -99999
- PARAMETER_TYPE = "Support_Data"
- SI_CONVERSION = "1.52590218967E-4>V"
- SIGNIFICANT_DIGITS = 5
- UNITS = "TM counts"
- VALUE_TYPE = INT

Data themselves:

&The Magnetic Field Decommutated WaveForm:

B_vec_xyz_Instrument__C1_CP_STA_DWF_HBR:

- CATDESC = "Cluster C1, HBR Magnetic Field Decommutated WaveForm"
- COMPONENT_DESC = "Cartesian xyz"
- COORDINATE_SYSTEM = "Instrument"
- DEPEND_0 = Time__C1_CP_STA_DWF_HBR
- ENTITY = "Magnetic_Field"
- FIELDNAM = "Cluster C1, HBR Magnetic Field Decommutated WaveForm"
- FILLVAL = -999
- FLUCTUATIONS = "Waveform"
- FRAME = "Instrument>xyz "
- LABEL_1 = "Bx","By","Bz"
- LABLAXIS = "Decommutated Magnetic Field Waveform"
- PARAMETER_TYPE = "Data"
- PARENT_DATASET_ID = C1_CP_STA_DWF_HBR
- PROPERTY = "Vector"
- QUALITY = 3
- REPRESENTATION_1 = "x","y","z"
- SI_CONVERSION = "1.52590218967E-4>V"
- SIGNIFICANT_DIGITS = 5
- SIZES = 3
- TENSOR_ORDER = "1"
- UNITS = "TM counts"
- VALUE_TYPE = INT

3.1.8 File Metadata Specification

3.1.8.1 NBR Mode

Each file contains the following **file metadata** keywords (example is shown for a full day file on 1 October 2001):

- FILE_NAME = C1_CP_STA_DWF_NBR__20011001_V05.cef
- FILE_FORMAT_VERSION = "CEF-2.0"
- FILE_TYPE = "cef"
- DATASET_VERSION = "05"
- LOGICAL_FILE_ID = "C1_CP_STA_DWF_NBR__20011001_V05"
- VERSION_NUMBER = "05"
- METADATA_TYPE = "CAA"
- METADATA_VERSION = "2.0"
- FILE_TIME_SPAN = "2001-10-01T00:00:00.000000Z/2001-10-01T23:59:59.999999Z"
- GENERATION_DATE = "2014-04-25T17:44:21.000Z"
- FILE_CAVEATS = "Produced using software RCL V2.1"
"TED version 2.5.0.109"
"TCOR option yes"
"Measurement time : 2001-10-01T21:45:38Z"
"Spin axis direction in GEI : 1.0, -67.09, 74.54"
"Spin period : 4.0234250"
"Mass center : 0.0001, 0.7609, -0.0001"
"Euler angles (degree): 0.00, 0.06"

3.1.8.2 HBR mode

Each file contains the following **file metadata** keywords (example is shown for a full day file on 1 October 2001):

- FILE_NAME = C1_CP_STA_DWF_HBR__20011001_V05.cef
- FILE_FORMAT_VERSION = "CEF-2.0"
- FILE_TYPE = "cef"
- DATASET_VERSION = "05"
- LOGICAL_FILE_ID = "C1_CP_STA_DWF_HBR__20011001_V05"
- VERSION_NUMBER = "05"
- METADATA_TYPE = "CAA"
- METADATA_VERSION = "2.0"
- FILE_TIME_SPAN = "2001-10-01T00:00:00.000000Z/2001-10-01T23:59:59.999999Z"
- GENERATION_DATE = "2014-04-25T17:59:11.000Z"
- FILE_CAVEATS = "Produced using software RCL V2.1"
"TED version 2.5.0.109"
"TCOR option yes"
"Measurement time : 2001-10-01T21:45:38Z"
"Spin axis direction in GEI : 1.0, -67.09, 74.54"
"Spin period : 4.0234250"
"Mass center : 0.0001, 0.7609, -0.0001"
"Euler angles (degree): 0.00, 0.06"

3.1.9 Dataset header example

3.1.9.1 NBR mode

Example: C1_CH_STA_DWF_NBR.ceh

```
! CEH VALIDATION 11 May 2016 by LPP, V05 (RP/PC/NC/RK)
!
START META = DATASET ID
  ENTRY = "C1 CP STA DWF NBR"
END META = DATASET ID
!
START META = DATA TYPE
  ENTRY = "CP"
END META = DATA TYPE
!
START META = DATASET TITLE
  ENTRY = "Magnetic Field Waveform - uncalibrated (25 Hz sampling)"
END META = DATASET TITLE
!
START META = CONTACT COORDINATES
  ENTRY = "Patrick Canu>PI>patrick.canu@lpp.polytechnique.fr"
  ENTRY = "Nicole Cornilleau-Wehrlin>Deputy-PI>nicole.cornilleau@lpp.polytechnique.fr"
  ENTRY = "Rodrigue Piberne>Archive Manager>rodrigue.piberne@lpp.polytechnique.fr"
END META = CONTACT COORDINATES
!
START META = DATASET DESCRIPTION
  ENTRY = "This dataset contains 3.99990667E-02s resolution measurements"
  ENTRY = "of the magnetic field Decommutated WaveForm (DWF)"
  ENTRY = "from the STAFF-SC instrument in NBR mode on the"
  ENTRY = "Cluster C1 spacecraft. This product is given in the STAFF"
  ENTRY = "Sensor WEC6 Reference Frame (SSW6RF)."
```

```
END META = DATASET DESCRIPTION
!
START META = PROCESSING LEVEL
  ENTRY = "Uncalibrated"
END META = PROCESSING LEVEL
!
START META = TIME RESOLUTION
  VALUE TYPE = FLOAT
  ENTRY = 3.99990667E-02
END META = TIME RESOLUTION
!
START META = MIN TIME RESOLUTION
  VALUE TYPE = FLOAT
  ENTRY = 3.99990667E-02
END META = MIN TIME RESOLUTION
!
START META = MAX TIME RESOLUTION
  VALUE TYPE = FLOAT
  ENTRY = 3.99990667E-02
END META = MAX TIME RESOLUTION
!
START META = DATASET CAVEATS
  ENTRY = "*C1 CQ STA DWF NBR CAVEATS"
  ENTRY = "DATASET VERSION HISTORY"
  ENTRY = "All versions:"
  ENTRY = "Use the TED software, provided by the Sheffield DWP group,"
  ENTRY = "with TCOR option used for a maximum UT time precision every second."
  ENTRY = "S/C HK used to calculate the phase are not corrected by TCOR."
  ENTRY = "The maximum error induced is 0.2 degree, including time around the leap second."
  ENTRY = "Version 03 : All the headers have been updated (laboratory name"
  ENTRY = "and email). Introduction of a new header file (Dataset)."
```

```
ENTRY = "For each data point time inside a one-second data block,"
ENTRY = "each sample has been interpolated to insure a continuous sampling rate."
ENTRY = "The phase has been re-calculated for each point inside each one-second block."
ENTRY = "Version 04 : Addition of data necessary for CWF data."
ENTRY = "Correction of the time interpolation and of the backward time problem."
ENTRY = "The Maximum Compression Error information has been removed from the"
ENTRY = "variables (MaxCompError xyz Instrument C[n] CP STA DWF NBR) and added "
```

```
ENTRY = "to the status (cf. User Guide)."
```

```
ENTRY = "Version 05 : Some support data fields were moved to the FILE CAVEATS section."
```



```
ENTITY = "Transformation"
FIELDNAM = "Misalignment Matrix"
FILLVAL = 1.E30
FRAME = "Instrument"
LABEL 1 = "L* C1","L* C2","L* C3"
PARAMETER TYPE = "Support Data"
PROPERTY = "Coordinate rotation"
QUALITY = 0
REPRESENTATION 1 = "x","y","z"
REPRESENTATION 2 = "x","y","z"
SI CONVERSION = "1>unitless"
SIGNIFICANT DIGITS = 5
SIZES = 3, 3
TENSOR ORDER = 2
UNITS = "unitless"
VALUE TYPE = FLOAT
END VARIABLE = Misalignment Matrix C1 CP STA DWF NBR
!
START VARIABLE = Minimum volt range C1 CP STA DWF NBR
CATDESC = "Minimum Volt range"
DATA = -5.00
FIELDNAM = "Minimum volt range"
FILLVAL = -9.99
PARAMETER TYPE = "Support Data"
SI CONVERSION = "1>V"
SIGNIFICANT DIGITS = 3
UNITS = "V"
VALUE TYPE = FLOAT
END VARIABLE = Minimum volt range C1 CP STA DWF NBR
!
START VARIABLE = Maximum volt range C1 CP STA DWF NBR
CATDESC = "Maximum Volt range"
DATA = 5.00
FIELDNAM = "Maximum volt range"
FILLVAL = -9.99
PARAMETER TYPE = "Support Data"
SI CONVERSION = "1>V"
SIGNIFICANT DIGITS = 3
UNITS = "V"
VALUE TYPE = FLOAT
END VARIABLE = Maximum volt range C1 CP STA DWF NBR
!
START VARIABLE = TM range min C1 CP STA DWF NBR
CATDESC = "Minimum telemetry range in TM counts"
DATA = 0
FIELDNAM = "TM range min"
FILLVAL = -1
PARAMETER TYPE = "Support Data"
SI CONVERSION = "1.52590218967E-4>V"
SIGNIFICANT DIGITS = 1
UNITS = "TM counts"
VALUE TYPE = INT
END VARIABLE = TM range min C1 CP STA DWF NBR
!
START VARIABLE = TM range max C1 CP STA DWF NBR
CATDESC = "Maximum telemetry range in TM counts"
DATA = 65535
FIELDNAM = "TM range max"
FILLVAL = -99999
PARAMETER TYPE = "Support Data"
SI CONVERSION = "1.52590218967E-4>V"
SIGNIFICANT DIGITS = 5
UNITS = "TM counts"
VALUE TYPE = INT
END VARIABLE = TM range max C1 CP STA DWF NBR
!
```



```

DELTA MINUS      = 0.1111085E-02
DELTA PLUS      = 0.1111085E-02
FIELDNAM        = "UT Time"
FILLVAL         = 9999-12-31T23:59:59.999999Z
LABLAXIS        = "UT"
PARAMETER TYPE  = "Support Data"
SI CONVERSION   = "1.0>s"
SIGNIFICANT DIGITS = 27
SIZES          = 1
UNITS          = "s"
VALUE TYPE     = ISO TIME
END VARIABLE = Time C1 CP STA DWF HBR
!
START VARIABLE = Status C1 CP STA DWF HBR
CATDESC       = "STAFF-SC Status"
DEPEND 0      = Time C1 CP STA DWF HBR
FIELDNAM      = "STAFF-SC Status"
FILLVAL       = ZZZZZZZZZZZZZZ
LABEL 1       = "Status"
LABLAXIS      = "Status"
PARAMETER CAVEATS = "We cannot certify the 9th character (EFW)"
PARAMETER TYPE  = "Support Data"
QUALITY        = 1
SIGNIFICANT DIGITS = 14
SIZES          = 1
UNITS          = "unitless"
VALUE TYPE     = CHAR
END VARIABLE = Status C1 CP STA DWF HBR
!
START VARIABLE = Phase Angle C1 CP STA DWF HBR
CATDESC       = "Phase Angle"
COORDINATE SYSTEM = "SC"
DEPEND 0      = Time C1 CP STA DWF HBR
FIELDNAM      = "Phase Angle"
FILLVAL       = -500.00
LABEL 1       = "Phase Angle"
LABLAXIS      = "Phase Angle"
PARAMETER CAVEATS = "Phase derived from Sun Pulse measurement: can be interpolated, see
STATUS"
PARAMETER TYPE  = "Support Data"
QUALITY        = 3
SI CONVERSION   = "3.141593/180>rad"
SIGNIFICANT DIGITS = 6
SIZES          = 1
UNITS          = "degree"
VALUE TYPE     = FLOAT
END VARIABLE = Phase Angle C1 CP STA DWF HBR
!
START VARIABLE = B vec xyz Instrument C1 CP STA DWF HBR
CATDESC       = "Cluster C1, HBR Magnetic Field Decommutated WaveForm"
COORDINATE SYSTEM = "Instrument"
DEPEND 0      = Time C1 CP STA DWF HBR
ENTITY        = "Magnetic Field"
FIELDNAM      = "Cluster C1, HBR Magnetic Field Decommutated WaveForm"
FILLVAL       = -999
FLUCTUATIONS  = "Waveform"
LABEL 1       = "Bx", "By", "Bz"
LABLAXIS      = "Decommutated Magnetic Field Waveform"
PARAMETER TYPE  = "Data"
PROPERTY      = "Vector"
QUALITY        = 3
REPRESENTATION 1 = "x", "y", "z"
SI CONVERSION   = "1.52590218967E-4>V"
SIGNIFICANT DIGITS = 5
SIZES          = 3
TENSOR ORDER  = 1
UNITS          = "TM counts"
VALUE TYPE     = INT
END VARIABLE = B vec xyz Instrument C1 CP STA DWF HBR
!
START VARIABLE = Misalignment Matrix C1 CP STA DWF HBR
CATDESC       = "C1 transformation from STAFF real instrument frame to the theoretic
orthogonal frame linked to the instrument."
COORDINATE SYSTEM = "Instrument"
DATA          = 1.0000, 0.0000, 0.0000, 0.0000, 1.0000, 0.0000, 0.0000, 0.0000, 1.0000
ENTITY        = "Transformation"
FIELDNAM      = "Misalignment Matrix"
FILLVAL       = 1.E30
FRAME         = "Instrument"
LABEL 1       = "L* C1", "L* C2", "L* C3"
PARAMETER TYPE  = "Support Data"
PROPERTY      = "Coordinate rotation"
QUALITY        = 0
REPRESENTATION_1 = "x", "y", "z"

```

```
REPRESENTATION 2 = "x","y","z"
SI CONVERSION    = "1>unitless"
SIGNIFICANT DIGITS = 5
SIZES           = 3, 3
TENSOR ORDER    = 2
UNITS           = "unitless"
VALUE TYPE      = FLOAT
END VARIABLE = Misalignment Matrix C1 CP STA DWF HBR
!
START VARIABLE = Minimum volt range C1 CP STA DWF HBR
CATDESC       = "Minimum Volt range"
DATA          = -5.00
FIELDNAM      = "Minimum volt range"
FILLVAL       = -9.99
PARAMETER TYPE = "Support Data"
SI CONVERSION = "1>V"
SIGNIFICANT DIGITS = 3
UNITS         = "V"
VALUE TYPE    = FLOAT
END VARIABLE = Minimum volt range C1 CP STA DWF HBR
!
START VARIABLE = Maximum volt range C1 CP STA DWF HBR
CATDESC       = "Maximum Volt range"
DATA          = 5.00
FIELDNAM      = "Maximum volt range"
FILLVAL       = -9.99
PARAMETER TYPE = "Support Data"
SI CONVERSION = "1>V"
SIGNIFICANT DIGITS = 3
UNITS         = "V"
VALUE TYPE    = FLOAT
END VARIABLE = Maximum volt range C1 CP STA DWF HBR
!
START VARIABLE = TM range min C1 CP STA DWF HBR
CATDESC       = "Minimum telemetry range in TM counts"
DATA          = 0
FIELDNAM      = "TM range min"
FILLVAL       = -1
PARAMETER TYPE = "Support Data"
SI CONVERSION = "1.52590218967E-4>V"
SIGNIFICANT DIGITS = 1
UNITS         = "TM counts"
VALUE TYPE    = INT
END VARIABLE = TM range min C1 CP STA DWF HBR
!
START VARIABLE = TM range max C1 CP STA DWF HBR
CATDESC       = "Maximum telemetry range in TM counts"
DATA          = 65535
FIELDNAM      = "TM range max"
FILLVAL       = -99999
PARAMETER TYPE = "Support Data"
SI CONVERSION = "1.52590218967E-4>V"
SIGNIFICANT DIGITS = 5
UNITS         = "TM counts"
VALUE TYPE    = INT
END VARIABLE = TM range max C1 CP STA DWF HBR
!
```

3.1.10 Dataset file example

3.1.10.1 NBR mode

Version 05 : C1_CP_STA_DWF_HBR__20070106_V05.cef

```
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
!                                     File Metadata !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
FILE NAME = "C1 CP STA DWF NBR  20070106 V05.cef"
FILE FORMAT VERSION = "CEF-2.0"
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                     Global Metadata !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
INCLUDE= CL CH MISSION.cef  ! Mission level metadata.
!
INCLUDE= C1 CH OBS.cef      ! Observatory level metadata.
!
INCLUDE= CL CH STA.cef     ! Experiment level metadata.
!
INCLUDE= C1 CH STA SC.cef  ! Instrument level metadata.
!
INCLUDE= C1 CH STA DWF NBR.cef  ! Dataset level metadata.
!
START META = FILE TYPE
  ENTRY = "cef"
END META = FILE TYPE
!
START META = DATASET VERSION
  ENTRY = "05"
END META = DATASET VERSION
!
START META = LOGICAL FILE ID
  ENTRY = "C1 CP STA DWF NBR  20070106 V05"
END META = LOGICAL FILE ID
!
START META = VERSION NUMBER
  ENTRY = "05"
END META = VERSION NUMBER
!
START META = METADATA TYPE
  ENTRY = "CAA"
END META = METADATA TYPE
!
START META = METADATA VERSION
  ENTRY = "2.0"
END META = METADATA VERSION
!
START META = FILE TIME SPAN
  VALUE TYPE = ISO TIME RANGE
  ENTRY = "2007-01-06T00:00:00.000000Z/2007-01-06T23:59:59.999999Z"
END META = FILE TIME SPAN
!
START META = GENERATION DATE
  VALUE TYPE = ISO TIME
  ENTRY = "2014-04-25T21:28:29.000Z"
END META = GENERATION DATE
!
START META = FILE CAVEATS
  ENTRY = "Produced using software RCL V2.1"
  ENTRY = "TED version 2.5.0.109"
  ENTRY = "TCOR option yes"
  ENTRY = "Measurement time : 2007-01-01T20:24:53Z"
  ENTRY = "Spin axis direction in GEI : 1.0, -61.27, 86.22"
  ENTRY = "Spin period : 4.1464550"
  ENTRY = "Mass center : 0.0001, 0.7535, -0.0001"
  ENTRY = "Euler angles (degree): -0.02, 0.07"
END META = FILE CAVEATS
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
!                                     Data !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
```

```
!
DATA UNTIL = "END OF FILE"
2007-01-06T00:00:00.014824Z,00100000000100, 210.00,33056,33124,32861
2007-01-06T00:00:00.054823Z,00100000000100, 213.47,33010,32959,32686
2007-01-06T00:00:00.094822Z,00100000000100, 216.94,32909,32871,32560
```

3.1.10.2 HBR mode

Version 05 : C1_CP_STA_DWF_HBR__20070106_V05.cef

```
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                 File Metadata !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
FILE NAME = "C1 CP STA DWF HBR 20070106 V05.cef"
FILE FORMAT VERSION = "CEF-2.0"
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                 Global Metadata !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
INCLUDE= CL CH MISSION.cef  ! Mission level metadata.
!
INCLUDE= C1 CH OBS.cef      ! Observatory level metadata.
!
INCLUDE= CL CH STA.cef     ! Experiment level metadata.
!
INCLUDE= C1 CH STA SC.cef  ! Instrument level metadata.
!
INCLUDE= C1 CH STA DWF HBR.cef ! Dataset level metadata.
!
START META = FILE TYPE
  ENTRY = "cef"
END META = FILE TYPE
!
START META = DATASET VERSION
  ENTRY = "05"
END META = DATASET VERSION
!
START META = LOGICAL FILE ID
  ENTRY = "C1 CP STA DWF HBR 20070106 V05"
END META = LOGICAL FILE ID
!
START META = VERSION NUMBER
  ENTRY = "05"
END META = VERSION NUMBER
!
START META = METADATA TYPE
  ENTRY = "CAA"
END META = METADATA TYPE
!
START META = METADATA VERSION
  ENTRY = "2.0"
END META = METADATA VERSION
!
START META = FILE TIME SPAN
  VALUE TYPE = ISO TIME RANGE
  ENTRY = "2007-01-06T00:00:00.000000Z/2007-01-06T23:59:59.999999Z"
END META = FILE TIME SPAN
!
START META = GENERATION DATE
  VALUE TYPE = ISO TIME
  ENTRY = "2014-04-25T21:59:12.000Z"
END META = GENERATION DATE
!
START META = FILE CAVEATS
  ENTRY = "Produced using software RCL V2.1"
  ENTRY = "TED version 2.5.0.109"
  ENTRY = "TCOR option yes"
  ENTRY = "Measurement time : 2007-01-01T20:24:53Z"
  ENTRY = "Spin axis direction in GEI : 1.0, -61.27, 86.22"
  ENTRY = "Spin period : 4.1464550"
  ENTRY = "Mass center : 0.0001, 0.7535, -0.0001"
  ENTRY = "Euler angles (degree): -0.02, 0.07"
END META = FILE CAVEATS
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                 Data !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
```

```
DATA UNTIL = "END OF FILE"  
2007-01-06T19:49:56.918400Z,001f1000000110, 306.30,32764,33082,32727  
2007-01-06T19:49:56.920622Z,001f1000000100, 306.49,32768,33077,32721  
2007-01-06T19:49:56.922844Z,001f1000000100, 306.69,32772,33079,32724  
2007-01-06T19:49:56.925066Z,001f1000000100, 306.88,32769,33081,32726  
2007-01-06T19:49:56.927288Z,001f1000000100, 307.07,32760,33070,32726
```

3.2 Level 2 data – SC – Calibrated WaveForm (CWF)

These data are given in two different frames: GSE and ISR2.

3.2.1 Format: CEF

3.2.2 Standard: cf 2.2.

3.2.3 Production Procedure: cf 2.3.1.

3.2.4 Quality Control Procedure: cf 2.4.1

3.2.5 Delivery Procedure

Secured ftp from LPP (lantana.lpp.polytechnique.fr) to ESTEC (caa.estec.esa.int).

3.2.6 Product Specification

One CEF file per day, per satellite is produced. This CEF file contains the Calibrated Wave Form of the Magnetic Field (level 2) and other variables or constant data (constant for one given file) described below. Data are given in either in GSE or in ISR2.

3.2.7 Dataset metadata description

3.2.7.1 GSE

The detached dataset header is called: **C1/C2/C3/C4_CH_STA_CWF_GSE.ceh**.

In this header, only the static parameters (global metadata, support data and data themselves description) are included.

Example of the **global metadata** keywords for C1_CP_STA_CWF_GSE are:

- DATASET_ID= C1_CP_STA_CWF_GSE
- DATA_TYPE= "CP"
- DATASET_TITLE = "Magnetic Field Waveform – calibrated"
- CONTACT_COORDINATES =

"Patrick CANU>PI>Patrick.Canu@lpp.polytechnique.fr"

"Nicole CORNILLEAU-WEHRLIN>Deputy-PI>

Nicole.Cornilleau@lpp.polytechnique.fr"

- DATASET_DESCRIPTION = "This dataset contains measurements of the magnetic field Calibrated WaveForm (CWF) from the STAFF-SC instrument in NBR mode (filtered from 0.6Hz to 10Hz and sampled to 12.5Hz) and in HBR mode (filtered from 0.6Hz to 180Hz and sampled to 225Hz), on the Cluster C1 spacecraft. This product is given in the GSE frame.
- PROCESSING_LEVEL = "Calibrated"
- MIN_TIME_RESOLUTION, same as TIME_RESOLUTION.
- MAX_TIME_RESOLUTION, same as TIME_RESOLUTION.

Note: The time resolution values given in the headers are more precise and satellite dependent.

- DATASET_CAVEATS = "*C1_CQ_STA_CWF_CAVEATS"
 "*C1_CQ_STA_CALIBRATION_CAVEATS"
 "*C1_CQ_STA_NOTSRP_CAVEATS"

DATASET VERSION HISTORY = Version 01: First version of dataset header.

Then, the metadata for the **Support variables** are

&Time which is the time index. Its properties are:

- CATDESC = "Time tag"
- DELTA_MINUS = "0"
- DELTA_PLUS = "Interval__C1_CP_STA_CWF_GSE"
- FIELDNAM = "UT Time"
- FILLVAL = 9999-12-31T23:59:59.999999Z
- LABLAXIS = "UT"
- PARAMETER_TYPE = "Support Data"
- SI_CONVERSION = "1.0>s"
- SIGNIFICANT_DIGITS = 27
- SIZES = "1"
- UNITS = "s"
- VALUE_TYPE = ISO_TIME

Originally, the Waveform data are separated in blocks or windows. Each block composed of several measurements (25 in Normal Bit Rate) covers 1s of measurement. The block is time tagged by TED and then split into individual measurements.

&Half interval which is half time interval between two samples. Its properties are:

- CATDESC = "Sampling interval length"
- FIELDNAM = "Sampling interval length"
- FILLVAL = 9.999999
- LABLAXIS = "s"
- PARAMETER_TYPE = "Support_Data"
- SI_CONVERSION = "1.0>s"
- SIGNIFICANT_DIGITS = 7

- UNITS = "s"
- VALUE_TYPE = FLOAT

&Status which is a word of ASCII characters, each depending on one different factor

- CATDESC = "STAFF-SC Status"
- DEPEND_0 = Time__C1_CP_STA_CWF_GSE
- FIELDNAM = "STAFF-SC Status"
- FILLVAL = ZZZZZZZZZZ
- LABEL_1 = "Status"
- LABLAXIS = "Status"
- PARAMETER_TYPE = "Support_Data"
- PARAMETER_CAVEATS = "See UG, Appendix C. We cannot certify the 9th character (EFW)"
- QUALITY = 1
- SIGNIFICANT_DIGITS = 14
- SIZES = 1
- UNITS = "unitless"
- VALUE_TYPE = CHAR

&Phase_Angle_SC_C1_STA_CWF_GSE:

- CATDESC = "Phase Angle"
- COORDINATE_SYSTEM = "SC"
- DEPEND_0 = Time__C1_CP_STA_CWF_GSE
- FIELDNAM = "Phase Angle"
- FILLVAL = -500
- LABEL_1 = "Phase Angle"
- LABLAXIS = "Phase Angle"
- PARAMETER_TYPE = "Support_Data"
- PARAMETER_CAVEATS = "Phase derivated from Sun Pulse measurement: can be interpolated, see STATUS"
- QUALITY = 3
- SI_CONVERSION = "1>degree"
- SIGNIFICANT_DIGITS = 6
- SIZES = 1
- UNITS = "degree"
- VALUE_TYPE = FLOAT

&Misalignment_Matrix_C1_CP_STA_CWF_GSE:

- CATDESC = "C1 transformation from STAFF real instrument frame to the theoretic orthogonal frame linked to the instrument."
- COORDINATE_SYSTEM = "Instrument"
- DATA = 1.0000, 0.0000, 0.0000, 0.0000, 1.0000, 0.0000, 0.0000, 0.0000, 1.0000
- ENTITY = "Transformation"
- FIELDNAM = "Misalignment_Matrix"
- FILLVAL = 1e30

- LABEL_1 = "M1","M2","M3"
- PARAMETER_TYPE = "Support_Data"
- PROPERTY = "Coordinate_rotation"
- REPRESENTATION_1 = "x","y","z"
- REPRESENTATION_2 = "x","y","z"
- QUALITY = 0
- SI_CONVERSION = "1>unitless"
- SIGNIFICANT_DIGITS = 5
- SIZES = 3,3
- UNITS = "unitless"
- VALUE_TYPE = FLOAT

Data themselves:

&The Magnetic Field Calibrated WaveForm:

B_vec_xyz_Instrument_C1_CP_STA_CWF_GSE:

- CATDESC = "Cluster C1, NBR Calibrated Magnetic Field WaveForm"
- COORDINATE_SYSTEM = "GSE"
- DEPEND_0 = Time__C1_CP_STA_CWF_GSE
- ENTITY = "Magnetic_Field"
- FIELDNAM = "Cluster C1, Calibrated Magnetic Field WaveForm "
- FILLVAL = 1e30
- FLUCTUATIONS = "Waveform"
- LABEL_1 = "Bx","By","Bz"
- LABLAXIS = "Decommutated Magnetic Field Waveform"
- PARAMETER_TYPE = "Data"
- PROPERTY = "Vector"
- QUALITY = 3
- REPRESENTATION_1 = "x","y","z"
- SI_CONVERSION = "1E9>T"
- SIGNIFICANT_DIGITS = 7
- SIZES = 3
- TENSOR_ORDER = "1"
- UNITS = "nT"
- VALUE_TYPE = FLOAT

3.2.7.2 ISR2:

The detached dataset header is called: **C1/C2/C3/C4_CH_STA_CWF_ISR2.cch.**

In this header, only the static parameters (global metadata, support data and data themselves description) are included.

Example of the **global metadata** keywords for C1_CP_STA_CWF_ISR2 are:

- DATASET_ID= C1_CP_STA_CWF_ISR2
- DATA_TYPE= "CP"
- DATASET_TITLE = "Magnetic Field Waveform – calibrated"
- CONTACT_COORDINATES =

"Patrick CANU>PI>Patrick.Canu@lpp.polytechnique.fr"

"Nicole CORNILLEAU-WEHRLIN>Deputy-PI>

Nicole.Cornilleau@lpp.polytechnique.fr"

- DATASET_DESCRIPTION = "This dataset contains measurements of the magnetic field Calibrated WaveForm (CWF) from the STAFF-SC instrument in NBR mode (filtered from 0.1Hz to 10Hz and sampled to 12.5Hz) and in HBR mode (filtered from 0.1Hz to 180Hz and sampled to 225Hz) and DC magnetic field components in the spin plane Dx, Dy, on the Cluster C1 spacecraft. This product is given in the ISR2 frame.
- PROCESSING_LEVEL = "Calibrated"
- MIN_TIME_RESOLUTION, same as TIME_RESOLUTION.
- MAX_TIME_RESOLUTION, same as TIME_RESOLUTION.

Note: The time resolution values given in the headers are more precise and satellite dependent.

- DATASET_CAVEATS = "*C1_CQ_STA_CWF_ISR2_CAVEATS"
 "*C1_CQ_STA_CALIBRATION_CAVEATS"
 "*C1_CQ_STA_NOTSRP_CAVEATS"

DATASET VERSION HISTORY = Version 01: First version of dataset header.

Then, the metadata for the **Support variables** are

&Time which is the time index. Its properties are:

- CATDESC = "Time tag"
- DELTA_MINUS = "0"
- DELTA_PLUS = "Interval__C1_CP_STA_CWF_ISR2"
- FIELDNAM = "UT Time"
- FILLVAL = 9999-12-31T23:59:59.999999Z
- LABLAXIS = "UT"
- PARAMETER_TYPE = "Support Data"
- SI_CONVERSION = "1.0>s"
- SIGNIFICANT_DIGITS = 27
- SIZES = "1"
- UNITS = "s"
- VALUE_TYPE = ISO_TIME

Originally, the Waveform data are separated in blocks or windows. Each block composed of several measurements (25 in Normal Bit Rate) covers 1s of measurement. The block is time tagged by TED and then split into individual measurements.

&Half interval which is half time interval between two samples. Its properties are:

- CATDESC = "Sampling interval length"
- FIELDNAM = "Sampling interval length"
- FILLVAL = 9.999999
- LABLAXIS = "s"
- PARAMETER_TYPE = "Support_Data"
- SI_CONVERSION = "1.0>s"

- SIGNIFICANT_DIGITS = 7
- UNITS = "s"
- VALUE_TYPE = FLOAT

&Status which is a word of ASCII characters, each depending on one different factor

- CATDESC = "STAFF-SC Status"
- DEPEND_0 = Time__C1_CP_STA_CWF_ISR2
- FIELDNAM = "STAFF-SC Status"
- FILLVAL = ZZZZZZZZZZ
- LABEL_1 = "Status"
- LABLAXIS = "Status"
- PARAMETER_TYPE = "Support_Data"
- PARAMETER_CAVEATS = "See UG, Appendix C. We cannot certify the 9th character (EFW)"
- QUALITY = 1
- SIGNIFICANT_DIGITS = 14
- SIZES = 1
- UNITS = "unitless"
- VALUE_TYPE = CHAR

&Phase_Angle_SC_C1_STA_CWF_ISR2:

- CATDESC = "Phase Angle"
- COORDINATE_SYSTEM = "SC"
- DEPEND_0 = Time__C1_CP_STA_CWF_ISR2
- FIELDNAM = "Phase Angle"
- FILLVAL = -500
- LABEL_1 = "Phase Angle"
- LABLAXIS = "Phase Angle"
- PARAMETER_TYPE = "Support_Data"
- PARAMETER_CAVEATS = "Phase derivated from Sun Pulse measurement: can be interpolated, see STATUS"
- QUALITY = 3
- SI_CONVERSION = "1>degree"
- SIGNIFICANT_DIGITS = 6
- SIZES = 1
- UNITS = "degree"
- VALUE_TYPE = FLOAT

&Misalignment_Matrix_C1_CP_STA_CWF_ISR2:

- CATDESC = "C1 transformation from STAFF real instrument frame to the theoretic orthogonal frame linked to the instrument."
- COORDINATE_SYSTEM = "Instrument"
- DATA = 1.0000, 0.0000, 0.0000, 0.0000, 1.0000, 0.0000, 0.0000, 0.0000, 1.0000
- ENTITY = "Transformation"
- FIELDNAM = "Misalignment_Matrix"
- FILLVAL = 1e30

- LABEL_1 = "M1","M2","M3"
- PARAMETER_TYPE = "Support_Data"
- PROPERTY = "Coordinate_rotation"
- REPRESENTATION_1 = "x","y","z"
- REPRESENTATION_2 = "x","y","z"
- QUALITY = 0
- SI_CONVERSION = "1>unitless"
- SIGNIFICANT_DIGITS = 5
- SIZES = 3,3
- UNITS = "unitless"
- VALUE_TYPE = FLOAT

Data themselves:

&The Magnetic Field Calibrated WaveForm:

B_vec_xyz_Instrument_C1_CP_STA_CWF_ISR2:

- CATDESC = "Cluster C1, NBR Calibrated Magnetic Field WaveForm"
- COORDINATE_SYSTEM = "ISR2"
- DEPEND_0 = Time__C1_CP_STA_CWF_ISR2
- ENTITY = "Magnetic_Field"
- FIELDNAM = "Cluster C1, Calibrated Magnetic Field WaveForm "
- FILLVAL = 1e30
- FLUCTUATIONS = "Waveform"
- LABEL_1 = "Bx","By","Bz"
- LABLAXIS = "Decommutated Magnetic Field Waveform"
- PARAMETER_TYPE = "Data"
- PROPERTY = "Vector"
- QUALITY = 3
- REPRESENTATION_1 = "x","y","z"
- SI_CONVERSION = "1E9>T"
- SIGNIFICANT_DIGITS = 7
- SIZES = 3
- TENSOR_ORDER = "1"
- UNITS = "nT"
- VALUE_TYPE = FLOAT

&BDC_vec_xy_Instrument_C1_CP_STA_CWF_ISR2:

- CATDESC = "Cluster C1, DC Magnetic Field in the spin plane"
- COORDINATE_SYSTEM = "ISR2"
- DEPEND_0 = Time__C1_CP_STA_CWF_ISR2
- ENTITY = "Magnetic_Field"
- FIELDNAM = "Cluster C1, DC Magnetic Field"
- FILLVAL = 1.e30
- FLUCTUATIONS = "Waveform"
- LABEL_1 = "Dx","Dy"
- LABLAXIS = "Calibrated Magnetic Field Waveform"
- PARAMETER_TYPE = "Data"
- PROPERTY = "Vector"

- QUALITY = 3
- REPRESENTATION_1 = "x","y"
- SI_CONVERSION = "1E9>T"
- SIGNIFICANT_DIGITS = 7
- SIZES = 2
- TENSOR_ORDER = 1
- UNITS = "nT"
- VALUE_TYPE = FLOAT

3.2.8 File Metadata Specification

Each file contains the following **file metadata** keywords (example is shown for a full day file on 1 October 2001):

3.2.8.1 GSE

- FILE_NAME = C1_CP_STA_CWF_GSE__20011001_V01.cef
- FILE_FORMAT_VERSION = "CEF-2.0"
- FILE_TYPE = "cef"
- DATASET_VERSION = "01"
- LOGICAL_FILE_ID = "C1_CP_STA_CWF_GSE__20011001_V03"
- VERSION_NUMBER = "01"
- METADATA_TYPE = "CAA"
- METADATA_VERSION = "2.0"
- FILE_TIME_SPAN = "2001-10-01T00:00:00.000000Z/2001-10-01T23:59:59.999999Z"
- GENERATION_DATE = "2012-05-09T11:58:02.000Z"
- FILE_CAVEATS = "Produced from DWF"
"TED version 2.5.0.109"
"TCOR option yes"
"Produced using software RCL V1.8"
"Calibration tables: feb 2013"
"Kernel size :4096 for HBR and 1024 for NBR"
"Shift size : 2 for HBR and 2 for NBR"
"Cutoff frequency : 0.60"
"Measurement time : 2001-10-01T21:45:38Z"
"Spin axis direction in GEI : 1.0, -67.09, 74.54"
"Spin period : 4.0234250"
"Mass center : 0.0001, 0.7609, -0.0001"
"Euler angles (degree): 0.00, 0.06"

3.2.8.2 ISR2

- FILE_NAME = C1_CP_STA_CWF_ISR2__20011001_V01.cef
- FILE_FORMAT_VERSION = "CEF-2.0"
- FILE_TYPE = "cef"
- DATASET_VERSION = "01"
- LOGICAL_FILE_ID = "C1_CP_STA_CWF_ISR2__20011001_V03"
- VERSION_NUMBER = "01"
- METADATA_TYPE = "CAA"
- METADATA_VERSION = "2.0"
- FILE_TIME_SPAN = "2001-10-01T00:00:00.000000Z/2001-10-01T23:59:59.999999Z"
- GENERATION_DATE = "2012-05-09T11:58:02.000Z"

- FILE_CAVEATS = "Produced from DWF"
"TED version 2.5.0.109"
"TCOR option yes"
"Produced using software RCL V2.0"
"Calibration tables: feb 2013"
"Kernel size :4096 for HBR and 1024 for NBR"
"Shift size : 2 for HBR and 2 for NBR"
"Cutoff frequency : 0.10"
"Measurement time : 2001-10-01T21:45:38Z"
"Spin axis direction in GEI : 1.0, -67.09, 74.54"
"Spin period : 4.0234250"
"Mass center : 0.0001, 0.7609, -0.0001"
"Euler angles (degree): 0.00, 0.06"

3.2.9 Dataset header example

3.2.9.1 GSE

Ex: C1_CP_STA_CWF_GSE.ceh

```
! CEH VALIDATION 20 April 2013 by LPP, V01 (RP/PR/NCW/PC)
!
START META = DATASET ID
  ENTRY = "C1 CP STA CWF GSE"
END META = DATASET ID
!
START META = DATA TYPE
  ENTRY = "CP"
END META = DATA TYPE
!
START META = DATASET TITLE
  ENTRY = "Magnetic Field Waveform - calibrated"
END META = DATASET TITLE
!
START META = CONTACT COORDINATES
  ENTRY = "Patrick Canu>PI>patrick.canu@lpp.polytechnique.fr"
  ENTRY = "Nicole Cornilleau-Wehrin>Deputy-PI>nicole.cornilleau@lpp.polytechnique.fr"
END META = CONTACT COORDINATES
!
START META = DATASET DESCRIPTION
  ENTRY = "This dataset contains measurements"
  ENTRY = "of the magnetic field Calibrated WaveForm (CWF)"
  ENTRY = "from the STAFF-SC instrument in NBR mode (filtered from 0.6Hz to 10Hz and sampled
to 12.5Hz)"
  ENTRY = "and in HBR mode (filtered from 0.6Hz to 180Hz and sampled to 225Hz)"
  ENTRY = "and DC magnetic field components in the spin plane Dx, Dy, on the"
  ENTRY = "Cluster C1 spacecraft. This product is given in the GSE frame."
END META = DATASET DESCRIPTION
!
START META = PROCESSING LEVEL
  ENTRY = "Calibrated"
END META = PROCESSING LEVEL
!
START META = MIN TIME RESOLUTION
  VALUE TYPE = FLOAT
  ENTRY = 3.99990667E-02
END META = MIN TIME RESOLUTION
!
START META = MAX TIME RESOLUTION
  VALUE TYPE = FLOAT
  ENTRY = 0.22221704E-02
END META = MAX TIME RESOLUTION
!
START META = DATASET CAVEATS
  ENTRY = "*C1 CQ STA CWF GSE CAVEATS"
```

```
ENTRY = "*C1 CQ STA CALIBRATION CAVEATS"  
ENTRY = "*C1 CQ STA NOTSRP CAVEATS"  
ENTRY = "DATASET VERSION HISTORY"  
ENTRY = "Version 01: First version of dataset header"  
END META = DATASET CAVEATS  
!  
!  
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
!                                                                 Variables !  
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
!  
START VARIABLE = Time   C1 CP STA CWF GSE  
CATDESC          = "Time tag"  
DELTA MINUS      = half interval   C1 CP STA CWF GSE  
DELTA PLUS       = half interval   C1 CP STA CWF GSE  
FIELDNAM         = "UT Time"  
FILLVAL         = 9999-12-31T23:59:59.999999Z  
LABLAXIS        = "UT"  
PARAMETER TYPE  = "Support Data"  
SI CONVERSION    = "1.0>s"  
SIGNIFICANT DIGITS = 27  
SIZES           = 1  
UNITS           = "s"  
VALUE TYPE      = ISO TIME  
END VARIABLE = Time   C1 CP STA CWF GSE  
!  
START VARIABLE = half interval   C1 CP STA CWF GSE  
CATDESC          = "Half sampling interval length"  
FIELDNAM         = "Half sampling interval length"  
FILLVAL         = 9.999999  
LABLAXIS        = "s"  
PARAMETER TYPE  = "Support Data"  
SI CONVERSION    = "1.0>s"  
SIGNIFICANT DIGITS = 7  
UNITS           = "s"  
VALUE TYPE      = FLOAT  
END VARIABLE = half interval   C1 CP STA CWF GSE  
!  
START VARIABLE = Status   C1 CP STA CWF GSE  
CATDESC          = "STAFF-SC Status"  
DEPEND 0         = Time   C1 CP STA CWF GSE  
FIELDNAM         = "STAFF-SC Status"  
FILLVAL         = ZZZZZZZZZZ  
LABEL 1         = "Status"  
LABLAXIS        = "Status"  
PARAMETER CAVEATS = "See UG, Appendix C. We cannot certify the 9th character (EFW)"  
PARAMETER TYPE  = "Support Data"  
QUALITY         = 1  
SIGNIFICANT DIGITS = 14  
SIZES           = 1  
UNITS           = "unitless"  
VALUE TYPE      = CHAR  
END VARIABLE = Status   C1 CP STA CWF GSE  
!  
START VARIABLE = Phase Angle   C1 CP STA CWF GSE  
CATDESC          = "Phase Angle"  
COORDINATE SYSTEM = "SC"  
DEPEND 0         = Time   C1 CP STA CWF GSE  
FIELDNAM         = "Phase Angle"  
FILLVAL         = -500.00  
LABEL 1         = "Phase Angle"  
LABLAXIS        = "Phase Angle"  
PARAMETER CAVEATS = "Phase derived from Sun Pulse measurement: can be interpolated, see  
STATUS"  
PARAMETER TYPE  = "Support Data"  
QUALITY         = 3  
SI CONVERSION    = "1>degree"  
SIGNIFICANT DIGITS = 6  
SIZES           = 1  
UNITS           = "degree"  
VALUE TYPE      = FLOAT  
END VARIABLE = Phase Angle   C1 CP STA CWF GSE  
!  
START VARIABLE = B vec xyz Instrument   C1 CP STA CWF GSE  
CATDESC          = "Cluster C1, Calibrated Magnetic Field WaveForm"  
COORDINATE SYSTEM = "GSE"  
DEPEND 0         = Time   C1 CP STA CWF GSE  
ENTITY          = "Magnetic Field"  
FIELDNAM         = "Cluster C1, Calibrated Magnetic Field WaveForm"  
FILLVAL         = 1.e30  
FLUCTUATIONS     = "Waveform"  
LABEL 1         = "Bx", "By", "Bz"  
LABLAXIS        = "Calibrated Magnetic Field Waveform"  
PARAMETER TYPE  = "Data"
```

```

PROPERTY          = "Vector"
QUALITY           = 3
REPRESENTATION 1  = "x","y","z"
SI CONVERSION     = "1E9>T"
SIGNIFICANT DIGITS = 7
SIZES             = 3
TENSOR ORDER     = 1
UNITS            = "nT"
VALUE TYPE       = FLOAT
END VARIABLE = B vec xyz Instrument C1 CP STA CWF GSE
!
START VARIABLE = Misalignment Matrix C1 CP STA CWF GSE
CATDESC        = "C1 transformation from STAFF real instrument frame to the theoretic
orthogonal frame linked to the instrument."
COORDINATE SYSTEM = "Instrument"
DATA           = 1.0000, 0.0000, 0.0000, 0.0000, 1.0000, 0.0000, 0.0000, 0.0000, 1.0000
ENTITY        = "Transformation"
FIELDNAM      = "Misalignment Matrix"
FILLVAL       = 1.E30
FRAME         = "Instrument"
LABEL 1       = "M1","M2","M3"
PARAMETER TYPE = "Support Data"
PROPERTY      = "Coordinate rotation"
QUALITY       = 0
REPRESENTATION 1 = "x","y","z"
REPRESENTATION 2 = "x","y","z"
SI CONVERSION  = "1>unitless"
SIGNIFICANT DIGITS = 5
SIZES         = 3, 3
TENSOR ORDER  = 2
UNITS         = "unitless"
VALUE TYPE    = FLOAT
END VARIABLE = Misalignment Matrix C1 CP STA CWF GSE
!

```

3.2.9.2 ISR2

Ex: C1_CP_STA_CWF_ISR2.ceh

```

! CEH VALIDATION 20 April 2014 by LPP, V01 (RP/PR/NCW/PC)
!
START META = DATASET ID
ENTRY = "C1 CP STA CWF ISR2"
END META = DATASET ID
!
START META = DATA TYPE
ENTRY = "CP"
END META = DATA TYPE
!
START META = DATASET TITLE
ENTRY = "Magnetic Field Waveform - calibrated"
END META = DATASET TITLE
!
START META = CONTACT COORDINATES
ENTRY = "Patrick Canu>PI>patrick.canu@lpp.polytechnique.fr"
ENTRY = "Nicole Cornilleau-Wehrin>Deputy-PI>nicole.cornilleau@lpp.polytechnique.fr"
END META = CONTACT COORDINATES
!
START META = DATASET DESCRIPTION
ENTRY = "This dataset contains measurements"
ENTRY = "of the magnetic field Calibrated WaveForm (CWF)"
ENTRY = "from the STAFF-SC instrument in NBR mode (filtered from 0.1Hz to 10Hz and sampled
to 12.5Hz)"
ENTRY = "and in HBR mode (filtered from 0.1Hz to 180Hz and sampled to 225Hz)"
ENTRY = "and DC magnetic field components in the spin plane Dx, Dy, on the"
ENTRY = "Cluster C1 spacecraft. This product is given in the ISR2 frame."
END META = DATASET DESCRIPTION
!
START META = PROCESSING LEVEL
ENTRY = "Calibrated"
END META = PROCESSING LEVEL
!
START META = MIN TIME RESOLUTION
VALUE TYPE = FLOAT
ENTRY = 3.99990667E-02
END META = MIN TIME RESOLUTION
!
START META = MAX TIME RESOLUTION
VALUE TYPE = FLOAT

```



```

FILLVAL = 1.e30
FLUCTUATIONS = "Waveform"
LABEL 1 = "Bx","By","Bz"
LABLAXIS = "Calibrated Magnetic Field Waveform"
PARAMETER TYPE = "Data"
PROPERTY = "Vector"
QUALITY = 3
REPRESENTATION 1 = "x","y","z"
SI CONVERSION = "1E9>T"
SIGNIFICANT DIGITS = 7
SIZES = 3
TENSOR ORDER = 1
UNITS = "nT"
VALUE TYPE = FLOAT
END VARIABLE = B vec xyz Instrument C1 CP STA CWF ISR2
!
START VARIABLE = BDC vec xy Instrument C1 CP STA CWF ISR2
CATDESC = "Cluster C1, DC Magnetic Field in the spin plane"
COORDINATE SYSTEM = "ISR2"
DEPEND 0 = Time C1 CP STA CWF ISR2
ENTITY = "Magnetic Field"
FIELDNAM = "Cluster C1, DC Magnetic Field"
FILLVAL = 1.e30
FLUCTUATIONS = "Waveform"
LABEL 1 = "Dx","Dy"
LABLAXIS = "Calibrated Magnetic Field Waveform"
PARAMETER TYPE = "Data"
PROPERTY = "Vector"
QUALITY = 3
REPRESENTATION 1 = "x","y"
SI CONVERSION = "1E9>T"
SIGNIFICANT DIGITS = 7
SIZES = 2
TENSOR ORDER = 1
UNITS = "nT"
VALUE TYPE = FLOAT
END VARIABLE = BDC vec xy Instrument C1 CP STA CWF ISR2
!
START VARIABLE = Misalignment Matrix C1 CP STA CWF ISR2
CATDESC = "C1 transformation from STAFF real instrument frame to the theoretic
orthogonal frame linked to the instrument."
COORDINATE SYSTEM = "Instrument"
DATA = 1.0000, 0.0000, 0.0000, 0.0000, 1.0000, 0.0000, 0.0000, 0.0000, 1.0000
ENTITY = "Transformation"
FIELDNAM = "Misalignment Matrix"
FILLVAL = 1.E30
FRAME = "Instrument"
LABEL 1 = "M1","M2","M3"
PARAMETER TYPE = "Support Data"
PROPERTY = "Coordinate rotation"
QUALITY = 0
REPRESENTATION 1 = "x","y","z"
REPRESENTATION 2 = "x","y","z"
SI CONVERSION = "1>unitless"
SIGNIFICANT DIGITS = 5
SIZES = 3, 3
TENSOR ORDER = 2
UNITS = "unitless"
VALUE TYPE = FLOAT
END VARIABLE = Misalignment Matrix C1 CP STA CWF ISR2
!

```

3.2.10 Dataset file example

3.2.10.1 GSE

Ex: C1_CP_STA_CWF_GSE__20010104_V01.cef"

```

!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
! File Metadata !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
FILE NAME = "C1 CP STA CWF GSE 20010104 V01.cef"
FILE FORMAT VERSION = "CEF-2.0"
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!

```

```
!                                     Global Metadata      !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
INCLUDE= CL CH MISSION.ceh  ! Mission level metadata.
!
INCLUDE= C1 CH OBS.ceh      ! Observatory level metadata.
!
INCLUDE= CL CH STA.ceh      ! Experiment level metadata.
!
INCLUDE= C1 CH STA SC.ceh   ! Instrument level metadata.
!
INCLUDE= C1 CH STA CWF GSE.ceh ! Dataset level metadata.
!
START META = FILE TYPE
  ENTRY = "cef"
END META = FILE TYPE
!
START META = DATASET VERSION
  ENTRY = "01"
END META = DATASET VERSION
!
START META = LOGICAL FILE ID
  ENTRY = "C1 CP STA CWF GSE 20010104 V01"
END META = LOGICAL FILE ID
!
START META = VERSION NUMBER
  ENTRY = "01"
END META = VERSION NUMBER
!
START META = METADATA TYPE
  ENTRY = "CAA"
END META = METADATA TYPE
!
START META = METADATA VERSION
  ENTRY = "2.0"
END META = METADATA VERSION
!
START META = FILE TIME SPAN
  VALUE TYPE = ISO TIME RANGE
  ENTRY = "2001-01-04T00:00:00.000000Z/2001-01-04T23:59:59.999999Z"
END META = FILE TIME SPAN
!
START META = GENERATION DATE
  VALUE TYPE = ISO TIME
  ENTRY = "2013-05-21T16:14:40.000Z"
END META = GENERATION DATE
!
START META = FILE CAVEATS
  ENTRY = "Produced from DWF"
  ENTRY = "TED version 2.5.0.109"
  ENTRY = "TCOR option yes"
  ENTRY = "Produced using software RCL V1.8"
  ENTRY = "Calibration tables: feb 2013"
  ENTRY = "Kernel size :4096 for HBR and 1024 for NBR"
  ENTRY = "Shift size : 2 for HBR and 2 for NBR"
  ENTRY = "Cutoff frequency : 0.60"
  ENTRY = "Measurement time : 2001-01-04T08:40:03Z"
  ENTRY = "Spin axis direction in GEI : 1.0, -60.89, 94.55"
  ENTRY = "Spin period : 4.0016010"
  ENTRY = "Mass center : 0.0001, 0.7613, -0.0001"
  ENTRY = "Euler angles (degree): 0.00, 0.03"
END META = FILE CAVEATS
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                     Data                  !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
DATA UNTIL = "END OF FILE"
2001-01-04T07:20:31.193286Z,0.040000,0000000000000000, 132.42, 0.427755E+00, 0.173744E+00,
0.372376E+00
2001-01-04T07:20:31.233285Z,0.040000,0000000000000000, 136.02, 0.491170E+00, 0.284578E+00,
0.411116E+00
2001-01-04T07:20:31.273284Z,0.040000,0000000000000000, 139.62, 0.467615E+00, 0.336600E+00,
0.483392E+00
2001-01-04T07:20:31.313283Z,0.040000,0000000000000000, 143.22, 0.476545E+00, 0.403262E+00,
0.457924E+00
2001-01-04T07:20:31.353283Z,0.040000,0000000000000000, 146.82, 0.487804E+00, 0.432446E+00,
0.347283E+00
```

3.2.10.2 ISR2

Ex: C1_CP_STA_CWF_ISR2__20010104_V01.cef"

```
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                 File Metadata !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
FILE NAME = "C1 CP STA CWF ISR2 20010104 V01.cef"
FILE FORMAT VERSION = "CEF-2.0"
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                 Global Metadata !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
INCLUDE= CL CH MISSION.cef  ! Mission level metadata.
!
INCLUDE= C1 CH OBS.cef      ! Observatory level metadata.
!
INCLUDE= CL CH STA.cef      ! Experiment level metadata.
!
INCLUDE= C1 CH STA SC.cef   ! Instrument level metadata.
!
INCLUDE= C1 CH STA CWF ISR2.cef ! Dataset level metadata.
!
START META = FILE TYPE
  ENTRY = "cef"
END META = FILE TYPE
!
START META = DATASET VERSION
  ENTRY = "01"
END META = DATASET VERSION
!
START META = LOGICAL FILE ID
  ENTRY = "C1 CP STA CWF ISR2 20010104 V01"
END META = LOGICAL FILE ID
!
START META = VERSION NUMBER
  ENTRY = "01"
END META = VERSION NUMBER
!
START META = METADATA TYPE
  ENTRY = "CAA"
END META = METADATA TYPE
!
START META = METADATA VERSION
  ENTRY = "2.0"
END META = METADATA VERSION
!
START META = FILE TIME SPAN
  VALUE TYPE = ISO TIME RANGE
  ENTRY = "2001-01-04T00:00:00.000000Z/2001-01-04T23:59:59.999999Z"
END META = FILE TIME SPAN
!
START META = GENERATION DATE
  VALUE TYPE = ISO TIME
  ENTRY = "2014-02-12T16:00:17.000Z"
END META = GENERATION DATE
!
START META = FILE CAVEATS
  ENTRY = "Produced from DWF"
  ENTRY = "TED version 2.5.0.109"
  ENTRY = "TCOR option yes"
  ENTRY = "Produced using software RCL V2.0"
  ENTRY = "Calibration tables: feb 2013"
  ENTRY = "Kernel size :4096 for HBR and 1024 for NBR"
  ENTRY = "Shift size : 2 for HBR and 2 for NBR"
  ENTRY = "Cutoff frequency : 0.10"
  ENTRY = "Measurement time : 2001-01-04T08:40:03Z"
  ENTRY = "Spin axis direction in GEI : 1.0, -60.89, 94.55"
  ENTRY = "Spin period : 4.0016010"
  ENTRY = "Mass center : 0.0001, 0.7613, -0.0001"
  ENTRY = "Euler angles (degree): 0.00, 0.03"
END META = FILE CAVEATS
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                 Data !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
DATA UNTIL = "END OF FILE"
```

2001-01-04T07:20:31.193286Z,0.040000,0000000000000000, 132.42,-0.173573E+01, 0.190039E+01, 0.435648E+01,-0.348259E+01, 0.308837E+02	
2001-01-04T07:20:31.233285Z,0.040000,0000000000000000, 136.02,-0.169945E+01, 0.186909E+01, 0.429633E+01,-0.348259E+01, 0.308837E+02	
2001-01-04T07:20:31.273284Z,0.040000,0000000000000000, 139.62,-0.171817E+01, 0.175526E+01, 0.426840E+01,-0.348494E+01, 0.308941E+02	

3.3 Level 2 data - SC - Complex Spectra (CS)

3.3.1 Format: CEF

3.3.2 Standard: cf 2.2.

3.3.3 Production Procedure: cf 2.3.1.

3.3.4 Quality Control Procedure: cf 2.4.1.

3.3.5 Delivery Procedure

Secured ftp from LPP (lantana.lpp.polytechnique.fr) to ESTEC (caa.estec.esa.int).

3.3.6 Product Specification

One CEF file per day, per satellite and per mode (HBR or NBR) is produced. This CEF file contains calibrated Complex Spectra (CS) of the magnetic field measured by STAFF-SC from 0.00Hz to 12.40Hz (0.00Hz to 224.90Hz) with a frequency/time resolution of 0.097658Hz x 10.24s (0.109866Hz x 9.10s), in NBR mode (in HBR mode) and filtered at 0.6Hz for GSE data.

Complex_Spectrum__C1_CP_STA_CS_NBR/HBR is a complex variable defined for x, y and z components (where C1 stands for satellite 1 in this example); they are given in nT units.

This variable is sampled for 128/2048 (NBR/HBR mode) frequencies described in Frequency__C1_CP_STA_CS_NBR/HBR (given in Hz).

DATA are given in GSE coordinate system.

3.3.7 Dataset metadata description

3.3.7.1 NBR mode

The detached dataset header is called: **C1/C2/C3/C4_CH_STA_CS_NBR.ceh**.

In this header, only the static parameters (global metadata, support data and data themselves description) are included.

Example of the **global metadata** keywords for C1_CP_STA_CS_NBR are:

- DATASET_ID="C1_CP_STA_CS_NBR"
- DATA_TYPE = "CP"
- DATASET_TITLE = "Magnetic Field Spectra in GSE (up to 12.5 Hz)"
- CONTACT_COORDINATES =
"Patrick CANU>PI>Patrick.Canu@lpp.polytechnique.fr"
"Nicole CORNILLEAU-WEHRLIN>Deputy-PI>
Nicole.Cornilleau@lpp.polytechnique.fr"
- DATASET_DESCRIPTION = "This dataset contains calibrated Complex Spectra (CS) of the magnetic field measured by STAFF-SC from 0.00Hz to 12.40Hz with a resolution of 0.097659Hz x 10.24s in NBR mode on the Cluster C1 spacecraft. This product is given in Geocentric Solar Ecliptic (GSE) coordinate system."
- PROCESSING_LEVEL = "Calibrated"
- TIME_RESOLUTION = 0.1024E+02
- MIN_TIME_RESOLUTION, same as time resolution
- MAX_TIME_RESOLUTION, same as time resolution
- DATASET_CAVEATS =
"*C1_CQ_STA_CS_NBR_CAVEATS"
"*C1_CQ_STA_CALIBRATION_CAVEATS"
"*C1_CQ_STA_NOTSRP_CAVEATS"
Data are filtered at 0.6Hz. All data below this value are not relevant and must not be used.
DATASET VERSION HISTORY
Version 04 : The 10% error is corrected (new transfer function - Nov 2011). Onboard calibration data are removed. When there is no Sun pulse, there is now a fill value in the data.
All versions inferior to 4: the transfer function of S/C #1 has 10% of error with all the other spacecraft up to 7Hz.
Version 03 : All the headers have been updated (laboratory name and email). Introduction of a new header file (Dataset). The data were time tagged using TED version 2.5.0 with option TCOR active(provided by the Sheffield DWP Group). Complex_Spectrum__C1_CP_STA_CS_NBR SI_CONVERSION has been corrected.
Version 02 :
Complex_Spectrum__C1_CP_STA_CS_NBR unit has been corrected.
Warning: the corresponding SI_CONVERSION was set to 1.E9 instead of 1.E-9. Older versions should not be used !
Version 01 : Obsolete. Should not be used !"

Then, the metadata for the **Support variables** are:

&Time_tags__C1_CP_STA_CS_NBR which the ISO time of data acquisition (Universal Time):

- PARAMETER_TYPE = "Support_Data"
- CATDESC = "Time tag"
- UNITS = "s"
- SI_CONVERSION = "1.0>s"
- SIZES = 1
- VALUE_TYPE = ISO_TIME
- SIGNIFICANT_DIGITS = 27
- FILLVAL = 9999-12-31T23:59:59.999Z
- FIELDNAM = "UT Time"
- LABLAXIS = "UT"

&Frequency represents the 128 frequency bin centres regularly spaces expressed in Hz. The zero frequency is not significant. The frequency resolution is 0.1024E+02:

- PARAMETER_TYPE = "Support_Data"
- CATDESC = "Frequency Bin"
- UNITS = "Hz"
- SI_CONVERSION = "1.0>Hz"
- SIZES = 128
- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 4
- FILLVAL = -0.1000E+31
- FIELDNAM = "Frequency"
- LABLAXIS = "F"
- SCALETYP = "Linear"
- DATA = 0.0000E+00, 0.9766E-01, 0.1953E+00, 0.2930E+00, 0.3906E+00, 0.4883E+00, 0.5860E+00, 0.6836E+00, 0.7813E+00, 0.8789E+00, 0.9766E+00, 0.1074E+01, 0.1172E+01, 0.1270E+01, 0.1367E+01, 0.1465E+01, 0.1563E+01, 0.1660E+01, 0.1758E+01, 0.1856E+01, 0.1953E+01, 0.2051E+01, 0.2148E+01, 0.2246E+01, 0.2344E+01, 0.2441E+01, 0.2539E+01, 0.2637E+01, 0.2734E+01, 0.2832E+01, 0.2930E+01, 0.3027E+01, 0.3125E+01, 0.3223E+01, 0.3320E+01, 0.3418E+01, 0.3516E+01, 0.3613E+01, 0.3711E+01, 0.3809E+01, 0.3906E+01, 0.4004E+01, 0.4102E+01, 0.4199E+01, 0.4297E+01, 0.4395E+01, 0.4492E+01, 0.4590E+01, 0.4688E+01, 0.4785E+01, 0.4883E+01, 0.4981E+01, 0.5078E+01, 0.5176E+01, 0.5274E+01, 0.5371E+01, 0.5469E+01, 0.5567E+01, 0.5664E+01, 0.5762E+01, 0.5860E+01, 0.5957E+01, 0.6055E+01, 0.6152E+01, 0.6250E+01, 0.6348E+01, 0.6445E+01, 0.6543E+01, 0.6641E+01, 0.6738E+01, 0.6836E+01, 0.6934E+01, 0.7031E+01, 0.7129E+01, 0.7227E+01, 0.7324E+01, 0.7422E+01, 0.7520E+01, 0.7617E+01, 0.7715E+01, 0.7813E+01, 0.7910E+01, 0.8008E+01, 0.8106E+01, 0.8203E+01, 0.8301E+01, 0.8399E+01, 0.8496E+01, 0.8594E+01, 0.8692E+01, 0.8789E+01, 0.8887E+01,

0.8985E+01, 0.9082E+01, 0.9180E+01, 0.9278E+01,
0.9375E+01, 0.9473E+01, 0.9571E+01, 0.9668E+01,
0.9766E+01, 0.9863E+01, 0.9961E+01, 0.1006E+02,
0.1016E+02, 0.1025E+02, 0.1035E+02, 0.1045E+02,
0.1055E+02, 0.1064E+02, 0.1074E+02, 0.1084E+02,
0.1094E+02, 0.1104E+02, 0.1113E+02, 0.1123E+02,
0.1133E+02, 0.1143E+02, 0.1152E+02, 0.1162E+02,
0.1172E+02, 0.1182E+02, 0.1191E+02, 0.1201E+02,
0.1211E+02, 0.1221E+02, 0.1230E+02, 0.1240E+02

Data themselves:

&Complex_spectrum__C1_CP_STA_CS_NBR variable stores the components of the Magnetic Field Complex Spectrum.

- PARENT_DATASET_ID = "C1_CP_STA_CS_NBR"
- PARAMETER_TYPE = "Data"
- CATDESK = "Components of the Magnetic Field Complex Spectrum"
- ENTITY = "Magnetic_Field"
- PROPERTY = "Vector"
- UNITS = "nT"
- SI_CONVERSION = "1.E-9>T"
- TENSOR_ORDER = 1
- COORDINATE_SYSTEM = "GSE"
- FRAME = "GSE>xyz"
- TENSOR_FRAME = "GSE"
- SIZES = 128,2,3 ! 128 frequency bins x 2 (Re.+Im.) parts
- DEPEND_0 = Time__C1_CP_STA_CS_NBR
- DEPEND_1 = Frequency__C1_CP_STA_CS_NBR
- LABEL_2 = "Re","Im"
- REPRESENTATION_3 = "x","y","z"
- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 4
- FILLVAL = -0.1000E+31
- QUALITY = 0
- FIELDNAM = "Magnetic Field Complex Spectrum"
- LABLAXIS = "Magnetic Field Complex Spectrum"

3.3.7.2 HBR mode

The detached dataset header is called: **C1/C2/C3/C4_CH_STA_CS_HBR.ceh**.

In this header, only the static parameters (global metadata, support data and data themselves description) are included.

Example of the **global metadata** keywords for C1_CP_STA_CS_HBR are:

- DATASET_ID="C1_CP_STA_CS_HBR"
- DATA_TYPE = "CP"
- DATASET_TITLE = "Magnetic Field Spectra in GSE (burst; up to 225 Hz)"

- CONTACT_COORDINATES =
"Patrick CANU>PI>Patrick.Canu@lpp.polytechnique.fr"
"Nicole CORNILLEAU-WEHRLIN>Deputy-PI>
Nicole.Cornilleau@lpp.polytechnique.fr"
- DATASET_DESCRIPTION = " This dataset contains calibrated Complex Spectra (CS) of the magnetic field measured by STAFF-SC from 0.00Hz to 224.90Hz with a resolution of 0.109866Hz x 9.10s in HBR mode on the Cluster C1 spacecraft. This product is given in Geocentric Solar Ecliptic (GSE) coordinate system."
- PROCESSING_LEVEL = "Calibrated"
- TIME_RESOLUTION = 0.9102E+01
- MIN_TIME_RESOLUTION, same as time resolution
- MAX_TIME_RESOLUTION, same as time resolution
- DATASET_CAVEATS = " *C1_CQ_STA_CS_HBR_CAVEATS. DATASET VERSION HISTORY. All versions: the transfer function of S/C #1 has 10% of error with all the other spacecraft up to 7Hz. Version 03: All the headers have been updated (laboratory name and email). Introduction of a new header file (Dataset). The data were time tagged using TED version 2.5.0 with option TCOR active (provided by the Sheffield DWP Group). Complex_Spectrum__C1_CP_STA_CS_NBR_SI_CONVERSION has been corrected. Version 02: Complex_Spectrum__C1_CP_STA_CS_NBR unit has been corrected. Warning: the corresponding SI_CONVERSION was set to 1.E9 instead of 1.E-9. Older versions should not be used ! Version 01 : Obsolete. Should not be used !"

Then, the metadata for the **Support variables** are:

&Time_tags__C1/C2/C3/C4_CP_STA_CS_HBR which the ISO time of data acquisition (Universal Time):

- PARAMETER_TYPE = "Support_Data"
- CATDESC = "Time tag"
- UNITS = "s"
- SI_CONVERSION = "1.0>s"
- SIZES = 1
- VALUE_TYPE = ISO_TIME
- SIGNIFICANT_DIGITS = 27
- FILLVAL = 9999-12-31T23:59:59.999Z
- FIELDNAM = "UT Time"
- LABLAXIS = "UT"

&Frequency represents the 128 frequency bin centres regularly spaces expressed in Hz. The zero frequency is not significant. The frequency resolution is 0.1024E+02:

- PARAMETER_TYPE = "Support_Data"
- CATDESC = "Frequency Bin"
- UNITS = "Hz"
- SI_CONVERSION = "1.0>Hz"
- SIZES = 128

- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 4
- FILLVAL = -0.1000E+31
- FIELDNAM = "Frequency"
- LABLAXIS = "F"
- SCALETYP = "Linear"
- DATA = 0.0000E+00, 0.1099E+00, 0.2197E+00, 0.3296E+00, \
0.4395E+00, 0.5493E+00, 0.6592E+00, 0.7691E+00, \
0.8789E+00, 0.9888E+00, 0.1099E+01, 0.1209E+01, \
0.1318E+01, 0.1428E+01, 0.1538E+01, 0.1648E+01, \
0.1758E+01, 0.1868E+01, 0.1978E+01, 0.2087E+01, \
0.2197E+01, 0.2307E+01, 0.2417E+01, 0.2527E+01, \
0.2637E+01, 0.2747E+01, 0.2857E+01, 0.2966E+01, \
0.3076E+01, 0.3186E+01, 0.3296E+01, 0.3406E+01, \
0.3516E+01, 0.3626E+01, 0.3735E+01, 0.3845E+01, \
0.3955E+01, 0.4065E+01, 0.4175E+01, 0.4285E+01, \
0.4395E+01, 0.4505E+01, 0.4614E+01, 0.4724E+01, \
0.4834E+01, 0.4944E+01, 0.5054E+01, 0.5164E+01, \
0.5274E+01, 0.5383E+01, 0.5493E+01, 0.5603E+01, \
0.5713E+01, 0.5823E+01, 0.5933E+01, 0.6043E+01, \
0.6152E+01, 0.6262E+01, 0.6372E+01, 0.6482E+01, \
0.6592E+01, 0.6702E+01, 0.6812E+01, 0.6922E+01, \
0.7031E+01, 0.7141E+01, 0.7251E+01, 0.7361E+01, \
0.7471E+01, 0.7581E+01, 0.7691E+01, 0.7800E+01, \
0.7910E+01, 0.8020E+01, 0.8130E+01, 0.8240E+01, \
0.8350E+01, 0.8460E+01, 0.8570E+01, 0.8679E+01, \
0.8789E+01, 0.8899E+01, 0.9009E+01, 0.9119E+01, \
0.9229E+01, 0.9339E+01, 0.9448E+01, 0.9558E+01, \
0.9668E+01, 0.9778E+01, 0.9888E+01, 0.9998E+01, \
0.1011E+02, 0.1022E+02, 0.1033E+02, 0.1044E+02, \
0.1055E+02, 0.1066E+02, 0.1077E+02, 0.1088E+02, \
0.1099E+02, 0.1110E+02, 0.1121E+02, 0.1132E+02, \
0.1143E+02, 0.1154E+02, 0.1165E+02, 0.1176E+02, \
0.1187E+02, 0.1198E+02, 0.1209E+02, 0.1220E+02, \
0.1230E+02, 0.1241E+02, 0.1252E+02, 0.1263E+02, \
0.1274E+02, 0.1285E+02, 0.1296E+02, 0.1307E+02, \
0.1318E+02, 0.1329E+02, 0.1340E+02, 0.1351E+02, \
0.1362E+02, 0.1373E+02, 0.1384E+02, 0.1395E+02, \
0.1406E+02, 0.1417E+02, 0.1428E+02, 0.1439E+02, \
0.1450E+02, 0.1461E+02, 0.1472E+02, 0.1483E+02, \
0.1494E+02, 0.1505E+02, 0.1516E+02, 0.1527E+02, \
0.1538E+02, 0.1549E+02, 0.1560E+02, 0.1571E+02, \
...

Data themselves:

&Complex_spectrum__C1_CP_STA_CS_HBR variable stores the components of the Magnetic Field Complex Spectrum.

- PARENT_DATASET_ID = "C1_CP_STA_CS_HBR"
- PARAMETER_TYPE = "Data"
- CATDESK = "Components of the Magnetic Field Complex Spectrum"
- ENTITY = "Magnetic_Field"
- PROPERTY = "Vector"
- UNITS = "nT"
- SI_CONVERSION = "1.E-9>T"
- TENSOR_ORDER = 1
- COORDINATE_SYSTEM = "GSE"
- FRAME = "GSE>xyz"
- TENSOR_FRAME = "GSE"
- SIZES = 2048,2,3 ! 128 frequency bins x 2 (Re.+Im.) parts
- DEPEND_0 = Time__C1_CP_STA_CS_HBR
- DEPEND_1 = Frequency__C1_CP_STA_CS_HBR
- LABEL_2 = "Re","Im"
- REPRESENTATION_3 = "x","y","z"
- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 4
- FILLVAL = -0.1000E+31
- QUALITY = 0
- FIELDNAM = "Magnetic Field Complex Spectrum"
- LABLAXIS = "Magnetic Field Complex Spectrum"

3.3.8 File Metadata Specification

3.3.8.1 NBR mode

Each file contains the following **file metadata** keywords (example is shown for a full day file on 1 October 2001):

- FILE_NAME = C1_CP_STA_CS_NBR__20011001_V03.cef
- FILE_FORMAT_VERSION = "CEF-2.0"
- END_OF_RECORD_MARKER = "\$"
- FILE_TYPE = "cef"
- DATASET_VERSION = "03"
- LOGICAL_FILE_ID = "C1_CP_STA_CS_ NBR__20011001_V03"
- VERSION_NUMBER = "03"
- METADATA_TYPE = "CAA"
- METADATA_VERSION = "2.0"
- GENERATION_DATE = 2008-11-21T20:00:08.000Z
- FILE_TIME_SPAN = 2001-10-01T00:00:00.000Z/2001-04-15T23:59:59.999Z
- FILE_CAVEATS = "Produced using software version RCL 0.7.9 26/06/2009."

3.3.8.2 HBR mode

Each file contains the following **file metadata** keywords (example is shown for a full day file on 1 October 2001):

- FILE_NAME = C1_CP_STA_CS_HBR__20011001_V03.cef
- FILE_FORMAT_VERSION = "CEF-2.0"

- END_OF_RECORD_MARKER = "\$"
- FILE_TYPE = "cef"
- DATASET_VERSION = "03"
- LOGICAL_FILE_ID = "C1_CP_STA_CS_HBR__20011001_V03"
- VERSION_NUMBER = "03"
- METADATA_TYPE = "CAA"
- METADATA_VERSION = "2.0"
- GENERATION_DATE = 2008-11-21T20:00:08.000Z
- FILE_TIME_SPAN = 2001-10-01T00:00:00.000Z/2001-04-15T23:59:59.999Z
- FILE_CAVEATS = "Produced using software version RCL 0.7.9 26/06/2009."

3.3.9 Dataset header example

3.3.9.1 NBR mode

Example: C1_CH_STA_CS_NBR.keh

```
! CEH VALIDATION 26 Nov 2009 by LPP, V03 (CB/VB)
!
START META = DATASET ID
  ENTRY = "C1 CP STA CS NBR"
END META = DATASET ID
!
START META = DATA TYPE
  ENTRY = "CP"
END META = DATA TYPE
!
START META = DATASET TITLE
  ENTRY = "Magnetic Field Spectra in GSE (up to 12.5 Hz)"
END META = DATASET TITLE
!
START META = CONTACT COORDINATES
  ENTRY = "Nicole Cornilleau-Wehrin>PI>Nicole.Cornilleau@lpp.polytechnique.fr"
END META = CONTACT COORDINATES
!
START META = DATASET DESCRIPTION
  ENTRY = "This dataset contains calibrated Complex Spectra (CS)"
  ENTRY = "of the magnetic field measured by STAFF-SC"
  ENTRY = "from 0.00Hz to 12.40Hz"
  ENTRY = "with a resolution of 0.097659Hz x 10.24s,"
  ENTRY = "in NBR mode on the Cluster C1 spacecraft."
  ENTRY = "This product is given in Geocentric Solar Ecliptic (GSE)"
  ENTRY = "coordinate system."
END META = DATASET DESCRIPTION
!
START META = PROCESSING LEVEL
  ENTRY = "Calibrated"
END META = PROCESSING LEVEL
!
START META = TIME RESOLUTION
  VALUE TYPE = FLOAT
  ENTRY = 0.1024E+02
END META = TIME RESOLUTION
!
START META = MIN TIME RESOLUTION
  VALUE TYPE = FLOAT
  ENTRY = 0.1024E+02
END META = MIN TIME RESOLUTION
!
START META = MAX TIME RESOLUTION
  VALUE TYPE = FLOAT
  ENTRY = 0.1024E+02
END META = MAX TIME RESOLUTION
!
START META = DATASET CAVEATS
  ENTRY = "*C1 CQ STA CS NBR CAVEATS"
  ENTRY = "DATASET VERSION HISTORY"
  ENTRY = "All versions: the transfer function of S/C #1 has 10% of error"
  ENTRY = "with all the other spacecraft up to 7Hz."
  ENTRY = "Version 03 : All the headers have been updated (laboratory name "
  ENTRY = "and email). Introduction of a new header file (Dataset). "
```



```
ENTRY = "The data were time tagged using TED version 2.5.0 with"
ENTRY = "option TCOR active(provided by the Sheffield DWP Group)."
```

ENTRY = "Complex Spectrum C1 CP STA CS NBR SI CONVERSION has been corrected."

```
ENTRY = "Version 02 : "
ENTRY = "Complex Spectrum C1 CP STA CS NBR unit has been corrected."
ENTRY = "Warning: the corresponding SI CONVERSION was set to 1.E9 instead of 1.E-9."
ENTRY= "Older versions should not be used !"
ENTRY = "Version 01 : Obsolete. Should not be used !"
END META = DATASET CAVEATS
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
!                                                                                               Variables !
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
START VARIABLE = Time C1 CP STA CS NBR
  PARENT DATASET ID = "C1 CP STA CS NBR"
  PARAMETER TYPE    = "Support Data"
  CATDESC           = "Time tag"
  UNITS             = "s"
SI CONVERSION      = "1.0>s"
  SIZES             = 1
DELTA PLUS         = 0.1024E+02
DELTA MINUS        = 0.0000E+00
VALUE TYPE         = ISO TIME
  SIGNIFICANT DIGITS = 27
  FILLVAL           = 9999-12-31T23:59:59.999999Z
  FIELDNAM          = "UT Time"
  LABLAXIS          = "UT"
END VARIABLE = Time C1 CP STA CS NBR
!
START VARIABLE = Frequency C1 CP STA CS NBR
  PARENT DATASET ID = "C1 CP STA CS NBR"
  PARAMETER TYPE    = "Support Data"
  CATDESC           = "Frequency Bin"
  UNITS             = "Hz"
SI CONVERSION      = "1.0>Hz"
  SIZES             = 128
DELTA PLUS         = 0.4883E-01
DELTA MINUS        = 0.4883E-01
VALUE TYPE         = FLOAT
  SIGNIFICANT DIGITS = 4
  FILLVAL           = -0.1000E+31
  FIELDNAM          = "Frequency"
  LABLAXIS          = "F"
  SCALETYP          = "Linear"
  DATA             = 0.0000E+00, 0.9766E-01, 0.1953E+00, 0.2930E+00, \
0.3906E+00, 0.4883E+00, 0.5860E+00, 0.6836E+00, \
0.7813E+00, 0.8789E+00, 0.9766E+00, 0.1074E+01, \
0.1172E+01, 0.1270E+01, 0.1367E+01, 0.1465E+01, \
0.1563E+01, 0.1660E+01, 0.1758E+01, 0.1856E+01, \
0.1953E+01, 0.2051E+01, 0.2148E+01, 0.2246E+01, \
0.2344E+01, 0.2441E+01, 0.2539E+01, 0.2637E+01, \
0.2734E+01, 0.2832E+01, 0.2930E+01, 0.3027E+01, \
0.3125E+01, 0.3223E+01, 0.3320E+01, 0.3418E+01, \
0.3516E+01, 0.3613E+01, 0.3711E+01, 0.3809E+01, \
0.3906E+01, 0.4004E+01, 0.4102E+01, 0.4199E+01, \
0.4297E+01, 0.4395E+01, 0.4492E+01, 0.4590E+01, \
0.4688E+01, 0.4785E+01, 0.4883E+01, 0.4981E+01, \
0.5078E+01, 0.5176E+01, 0.5274E+01, 0.5371E+01, \
0.5469E+01, 0.5567E+01, 0.5664E+01, 0.5762E+01, \
0.5860E+01, 0.5957E+01, 0.6055E+01, 0.6152E+01, \
0.6250E+01, 0.6348E+01, 0.6445E+01, 0.6543E+01, \
0.6641E+01, 0.6738E+01, 0.6836E+01, 0.6934E+01, \
0.7031E+01, 0.7129E+01, 0.7227E+01, 0.7324E+01, \
0.7422E+01, 0.7520E+01, 0.7617E+01, 0.7715E+01, \
0.7813E+01, 0.7910E+01, 0.8008E+01, 0.8106E+01, \
0.8203E+01, 0.8301E+01, 0.8399E+01, 0.8496E+01, \
0.8594E+01, 0.8692E+01, 0.8789E+01, 0.8887E+01, \
0.8985E+01, 0.9082E+01, 0.9180E+01, 0.9278E+01, \
0.9375E+01, 0.9473E+01, 0.9571E+01, 0.9668E+01, \
0.9766E+01, 0.9864E+01, 0.9961E+01, 0.1006E+02, \
0.1016E+02, 0.1025E+02, 0.1035E+02, 0.1045E+02, \
0.1055E+02, 0.1064E+02, 0.1074E+02, 0.1084E+02, \
0.1094E+02, 0.1104E+02, 0.1113E+02, 0.1123E+02, \
0.1133E+02, 0.1143E+02, 0.1152E+02, 0.1162E+02, \
0.1172E+02, 0.1182E+02, 0.1191E+02, 0.1201E+02, \
0.1211E+02, 0.1221E+02, 0.1230E+02, 0.1240E+02
END VARIABLE = Frequency C1 CP STA CS NBR
!
START VARIABLE = Complex Spectrum C1 CP STA CS NBR
  PARENT DATASET ID = "C1 CP STA CS NBR"
  PARAMETER TYPE    = "Data"
  CATDESC           = "Components of the Magnetic Field Complex Spectrum"
  ENTITY            = "Magnetic_Field"
```



```

PROPERTY          = "Vector"
UNITS              = "nT"
SI CONVERSION     = "1.E-9>T"
TENSOR ORDER      = 1
COORDINATE SYSTEM = "GSE"
FRAME             = "GSE>xyz"
TENSOR FRAME      = "GSE"
SIZES            = 128,2,3 ! 128 frequencies x 2 (Re.+Im.) parts vector
DEPEND 0         = Time C1 CP STA CS NBR
DEPEND 1         = Frequency C1 CP STA CS NBR
LABEL 2          = "Re","Im"
REPRESENTATION 3 = "x","y","z"
VALUE TYPE       = FLOAT
SIGNIFICANT DIGITS = 4
FILLVAL         = -0.1000E+31
QUALITY         = 0
FIELDNAM        = "Magnetic Field Complex Spectrum"
LABLAXIS        = "Magnetic Field Complex Spectrum"
END_VARIABLE = Complex_Spectrum_C1_CP_STA_CS_NBR
  
```

3.3.9.2 HBR mode

Example: C1_CH_STA_CS_HBR.keh

```

!CEH VALIDATION 09 May 2012 by LPP, header V04, (RP)
!
START META = DATASET ID
  ENTRY = "C1 CP STA CS HBR"
END META = DATASET ID
!
START META = DATA TYPE
  ENTRY = "CP"
END META = DATA TYPE
!
START META = DATASET TITLE
  ENTRY = "Magnetic Field Spectra in GSE (burst; up to 225 Hz)"
END META = DATASET TITLE
!
START META = CONTACT COORDINATES
  ENTRY = "Patrick Canu>PI>patrick.canu@lpp.polytechnique.fr"
  ENTRY = "Nicole Cornilleau-Wehrlein>Deputy-PI>nicole.cornilleau@lpp.polytechnique.fr"
END META = CONTACT COORDINATES
!
START META = DATASET DESCRIPTION
  ENTRY = "This dataset contains calibrated Complex Spectra (CS)"
  ENTRY = "of the magnetic field measured by STAFF-SC"
  ENTRY = "from 0.00Hz to 224.90Hz"
  ENTRY = "with a resolution of 0.109866Hz x 9.10s,"
  ENTRY = "in HBR mode on the Cluster C1 spacecraft."
  ENTRY = "This product is given in Geocentric Solar Ecliptic (GSE)"
  ENTRY = "coordinate system."
END META = DATASET DESCRIPTION
!
START META = PROCESSING LEVEL
  ENTRY = "Calibrated"
END META = PROCESSING LEVEL
!
START META = TIME RESOLUTION
  VALUE TYPE = FLOAT
  ENTRY = 0.9102E+01
END META = TIME RESOLUTION
!
START META = MIN TIME RESOLUTION
  VALUE TYPE = FLOAT
  ENTRY = 0.9102E+01
END META = MIN TIME RESOLUTION
!
START META = MAX TIME RESOLUTION
  VALUE TYPE = FLOAT
  ENTRY = 0.9102E+01
END META = MAX TIME RESOLUTION
!
START META = DATASET CAVEATS
  ENTRY = "*C1 CQ STA CS HBR CAVEATS"
  ENTRY = "*C1 CQ STA NOTSRP CAVEATS"
  ENTRY = "DATASET VERSION HISTORY"
  ENTRY = "All versions: the transfer function of S/C #1 has 10% of error"
  ENTRY = "with all the other spacecraft up to 7Hz."
  ENTRY = "Version 03 : All the headers have been updated (laboratory name "
  
```

```
ENTRY = "and email). Introduction of a new header file (Dataset). "  
ENTRY = "The data were time tagged using TED version 2.5.0 with"  
ENTRY = "option TCOR active(provided by the Sheffield DWP Group)."  
ENTRY = "Complex Spectrum C1 CP STA CS NBR SI CONVERSION has been corrected."  
ENTRY = "Version 02 : "  
ENTRY = "Complex Spectrum C1 CP STA CS NBR unit has been corrected."  
ENTRY = "Warning: the corresponding SI CONVERSION was set to 1.E9 instead of 1.E-9."  
ENTRY= "Older versions should not be used !"  
ENTRY = "Version 01 : Obsolete. Should not be used !"  
END META = DATASET CAVEATS  
!  
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
!                                                                                               Variables !  
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
!  
START VARIABLE = Time C1 CP STA CS HBR  
  PARENT DATASET ID = "C1 CP STA CS HBR"  
  PARAMETER TYPE    = "Support Data"  
  CATDESC          = "Time tag"  
  UNITS            = "s"  
  SI CONVERSION    = "1.0>s"  
  SIZES            = 1  
  DELTA PLUS       = 0.9102E+01  
  DELTA MINUS      = 0.0000E+00  
  VALUE TYPE       = ISO TIME  
  SIGNIFICANT DIGITS = 27  
  FILLVAL          = 9999-12-31T23:59:59.999999Z  
  FIELDNAM         = "UT Time"  
  LABLAXIS         = "UT"  
END VARIABLE = Time C1 CP STA CS HBR  
!  
START VARIABLE = Frequency C1 CP STA CS HBR  
  PARENT DATASET ID = "C1 CP STA CS HBR"  
  PARAMETER TYPE    = "Support Data"  
  CATDESC          = "Frequency Bin"  
  UNITS            = "Hz"  
  SI CONVERSION    = "1.0>Hz"  
  SIZES            = 2048  
  DELTA PLUS       = 0.5493E-01  
  DELTA MINUS      = 0.5493E-01  
  VALUE TYPE       = FLOAT  
  SIGNIFICANT DIGITS = 4  
  FILLVAL          = -0.1000E+31  
  FIELDNAM         = "Frequency"  
  LABLAXIS         = "F"  
  SCALETYP        = "Linear"  
  DATA            = 0.0000E+00, 0.1099E+00, 0.2197E+00, 0.3296E+00, \  
                    0.4395E+00, 0.5493E+00, 0.6592E+00, 0.7691E+00, \  
                    0.8789E+00, 0.9888E+00, 0.1099E+01, 0.1209E+01, \  
                    0.1318E+01, 0.1428E+01, 0.1538E+01, 0.1648E+01, \  
                    0.1758E+01, 0.1868E+01, 0.1978E+01, 0.2087E+01, \  
                    0.2197E+01, 0.2307E+01, 0.2417E+01, 0.2527E+01, \  
                    0.2637E+01, 0.2747E+01, 0.2857E+01, 0.2966E+01, \  
                    0.3076E+01, 0.3186E+01, 0.3296E+01, 0.3406E+01, \  
                    0.3516E+01, 0.3626E+01, 0.3735E+01, 0.3845E+01, \  
                    0.3955E+01, 0.4065E+01, 0.4175E+01, 0.4285E+01, \  
                    0.4395E+01, 0.4505E+01, 0.4614E+01, 0.4724E+01, \  
                    0.4834E+01, 0.4944E+01, 0.5054E+01, 0.5164E+01, \  
                    0.5274E+01, 0.5383E+01, 0.5493E+01, 0.5603E+01, \  
                    0.5713E+01, 0.5823E+01, 0.5933E+01, 0.6043E+01, \  
                    0.6152E+01, 0.6262E+01, 0.6372E+01, 0.6482E+01, \  
                    0.6592E+01, 0.6702E+01, 0.6812E+01, 0.6922E+01, \  
                    ...  
                    0.2215E+03, 0.2216E+03, 0.2217E+03, 0.2218E+03, \  
                    0.2219E+03, 0.2220E+03, 0.2221E+03, 0.2223E+03, \  
                    0.2224E+03, 0.2225E+03, 0.2226E+03, 0.2227E+03, \  
                    0.2228E+03, 0.2229E+03, 0.2230E+03, 0.2231E+03, \  
                    0.2232E+03, 0.2234E+03, 0.2235E+03, 0.2236E+03, \  
                    0.2237E+03, 0.2238E+03, 0.2239E+03, 0.2240E+03, \  
                    0.2241E+03, 0.2242E+03, 0.2243E+03, 0.2245E+03, \  
                    0.2246E+03, 0.2247E+03, 0.2248E+03, 0.2249E+03  
END VARIABLE = Frequency C1 CP STA CS HBR  
!  
START VARIABLE = Complex Spectrum C1 CP STA CS HBR  
  PARENT DATASET ID = "C1 CP STA CS HBR"  
  PARAMETER TYPE    = "Data"  
  CATDESC          = "Components of the Magnetic Field Complex Spectrum"  
  ENTITY           = "Magnetic Field"  
  PROPERTY         = "Vector"  
  UNITS            = "nT"  
  SI CONVERSION    = "1.E-9>T"  
  TENSOR ORDER     = 1  
  COORDINATE SYSTEM = "GSE"  
  FRAME            = "GSE>xyz"
```

```
TENSOR FRAME = "GSE"  
SIZES = 2048,2,3 ! 2048 frequencies x 2 (Re.+Im.) parts vector  
DEPEND 0 = Time C1 CP STA CS HBR  
DEPEND 1 = Frequency C1 CP STA CS HBR  
LABEL 2 = "Re", "Im"  
REPRESENTATION 3 = "x", "y", "z"  
VALUE TYPE = FLOAT  
SIGNIFICANT DIGITS = 4  
FILLVAL = -0.1000E+31  
QUALITY = 0  
FIELDNAM = "Magnetic Field Complex Spectrum"  
LABLAXIS = "Magnetic Field Complex Spectrum"  
END_VARIABLE = Complex_Spectrum_C1_CP_STA_CS_HBR
```


0.9487E-02	-0.5410E-02	0.8733E-03	0.2584E-02	-0.3714E-02	0.6517E-02
-0.7152E-03	-0.2295E-02	0.1605E-02	0.7264E-04	0.2318E-02	-0.6418E-02
-0.5937E-02	-0.2451E-02	0.3844E-02	-0.4186E-02	0.7393E-04	0.4084E-02
0.5177E-02	0.2654E-02	0.1776E-03	0.3426E-02	0.1500E-02	-0.6400E-04
-0.1242E-03	0.8116E-03	0.2876E-04	-0.2541E-02	-0.8245E-03	-0.1721E-02
0.8735E-03	-0.1741E-02	-0.1083E-02	0.7435E-03	0.1785E-03	0.1964E-02
-0.2419E-02	0.1714E-02	-0.3588E-03	-0.3401E-02	0.1190E-02	-0.2958E-02
0.6563E-03	-0.1900E-02	0.7925E-03	0.1578E-02	-0.8310E-03	0.1494E-02
0.9096E-03	-0.2995E-03	0.7615E-03	0.1731E-02	-0.5387E-04	-0.1375E-02
-0.2291E-02	0.3448E-03	0.4417E-03	-0.8647E-03	-0.1218E-02	-0.1550E-03
0.6157E-03	0.6974E-03	0.4092E-03	0.6913E-03	0.1018E-02	0.4613E-03
0.2645E-03	0.9881E-03	-0.1862E-02	-0.1195E-04	-0.2240E-03	-0.9472E-03
-0.8376E-03	-0.5796E-03	0.7203E-03	-0.1603E-02	-0.6075E-03	0.6301E-03
0.2533E-04	0.2209E-04	-0.8560E-03	0.5232E-03	0.1081E-02	-0.2704E-03
0.9928E-03	-0.6617E-03	0.2773E-04	0.2151E-03	-0.1698E-02	0.5259E-03
-0.1136E-02	0.4059E-03	0.2979E-03	-0.5315E-03	0.8745E-03	0.5992E-03
0.4040E-03	0.6789E-03	-0.5050E-03	-0.2757E-03	0.4227E-03	-0.6081E-03
0.2924E-03	-0.3360E-03	-0.3411E-03	0.3305E-03	0.1548E-03	0.1164E-05
0.6834E-03	-0.6305E-03	0.7404E-03	0.1394E-02	0.3542E-03	-0.1622E-03
0.6417E-03	0.2637E-03	0.8060E-03	-0.1788E-03	-0.1327E-03	0.3543E-03
0.9107E-03	0.1592E-03	-0.8197E-03	-0.2991E-03	0.3341E-03	-0.1105E-03
0.4229E-03	0.4498E-03	0.1196E-03	-0.2537E-03	-0.9413E-03	-0.4298E-03
-0.4944E-03	-0.8967E-03	0.1124E-03	-0.1687E-03	-0.5880E-03	0.4774E-03
-0.4102E-03	0.3688E-03	0.1560E-02	0.1710E-03	0.4571E-03	-0.8744E-03
-0.2793E-03	0.6403E-04	-0.8826E-03	-0.7828E-03	-0.4629E-03	-0.2197E-04
0.1097E-02	-0.6676E-04	-0.3779E-03	0.9761E-03	-0.1184E-03	-0.4554E-03
-0.1082E-02	-0.3064E-03	-0.1457E-04	-0.1058E-02	0.2411E-03	0.1836E-03
-0.6735E-03	-0.1978E-03	-0.1012E-03	-0.1728E-03	0.2831E-03	0.4975E-03
-0.4486E-03	-0.9074E-05	-0.4425E-03	0.2059E-03	0.2628E-03	0.3966E-04
0.2107E-03	-0.6676E-04	0.3024E-05	-0.1780E-03	-0.1394E-03	0.4635E-03
-0.6412E-03	-0.1887E-03	-0.2983E-03	0.7758E-03	0.3826E-03	-0.1083E-03
0.8616E-03	0.1605E-03	0.5191E-04	0.7963E-04	-0.5445E-03	0.4745E-03
0.2059E-03	0.6699E-03	0.5467E-03	-0.2810E-03	0.4206E-03	0.5340E-03
-0.5783E-04	0.1530E-03	-0.6948E-04	0.3699E-03	-0.4570E-03	-0.1171E-02
0.5682E-03	-0.3468E-03	-0.3207E-03	-0.9958E-04	0.7903E-04	0.3005E-03
0.1259E-03	0.1049E-03	0.4388E-03	-0.9741E-04	-0.4602E-04	-0.3208E-03
-0.2158E-04	0.3005E-03	0.1367E-03	0.1710E-04	-0.1862E-03	-0.1204E-03
-0.9058E-04	-0.7525E-03	0.3708E-03	-0.4808E-03	0.1455E-03	-0.3561E-04
0.8426E-04	0.2580E-03	-0.6007E-04	0.6040E-04	0.9608E-04	-0.1891E-04
-0.4198E-03	-0.1867E-03	-0.2447E-03	-0.1797E-03	-0.5785E-03	-0.1742E-03
-0.4573E-04	-0.1715E-05	0.4301E-03	0.5469E-05	0.5303E-03	-0.8688E-04
0.6497E-04	0.8145E-04	-0.6644E-03	0.3335E-03	-0.3215E-03	0.3925E-04
-0.4316E-03	-0.1609E-03	0.9597E-04	-0.1614E-03	0.3310E-03	0.4649E-04
-0.5902E-04	-0.3637E-03	0.1192E-03	0.4485E-03	-0.1761E-03	0.4503E-03
0.3779E-03	0.1801E-03	-0.7963E-04	-0.4135E-04	0.5599E-04	0.1072E-03
-0.1089E-03	0.2441E-03	-0.5840E-04	-0.3566E-03	0.1185E-03	-0.3952E-03
0.5763E-03	-0.1873E-03	0.2648E-03	0.8662E-04	-0.2169E-03	0.1035E-03
-0.4632E-04	0.1678E-03	-0.7276E-04	0.1013E-03	0.2871E-03	-0.8757E-04
-0.3204E-04	-0.2325E-04	0.2912E-03	-0.3689E-04	0.1388E-03	-0.1793E-03
-0.8953E-04	0.7987E-04	-0.2097E-03	0.4127E-04	-0.1025E-03	0.2197E-03
0.4810E-04	0.3039E-03	-0.4189E-04	-0.8668E-04	-0.4738E-03	0.3471E-03
-0.1388E-03	-0.9822E-04	-0.8902E-04	0.1216E-03	-0.7893E-05	-0.1586E-03
-0.1885E-03	-0.5073E-04	-0.4087E-05	-0.5800E-03	-0.4751E-04	0.1268E-03
0.3338E-03	-0.3226E-03	0.1040E-03	0.7668E-04	0.4456E-04	-0.2045E-03
0.1788E-03	0.6261E-05	0.1635E-03	0.2492E-03	0.1706E-03	0.3011E-04
-0.1566E-04	0.1096E-03	-0.2337E-04	0.2443E-03	-0.2189E-03	0.3849E-04
-0.9956E-04	0.2014E-04	0.2098E-03	-0.9331E-04	-0.4300E-04	0.8838E-04
-0.3168E-03	0.3102E-03	0.5490E-04	-0.1804E-03	0.2783E-03	-0.1276E-03
-0.1384E-03	-0.1529E-03	-0.2480E-03	-0.1627E-03	-0.1780E-03	0.1035E-03
0.3066E-03	-0.2918E-03	0.2076E-03	-0.3168E-03	0.1654E-03	-0.1983E-03
0.1498E-03	0.3240E-04	0.2298E-03	0.2273E-03	0.2365E-03	-0.9949E-04
0.8883E-04	-0.2648E-04	-0.2961E-03	-0.9546E-05	-0.7498E-04	-0.4652E-05
-0.1309E-03	-0.9703E-04	-0.1955E-03	-0.5580E-04	0.1161E-03	0.1446E-03
0.2577E-05	-0.6841E-04	0.1204E-03	0.2856E-03	-0.3792E-03	0.1240E-03
-0.5409E-04	0.1382E-04	-0.1508E-03	-0.1934E-03	-0.7831E-04	0.1658E-03
0.1011E-05	0.2686E-03	0.6826E-04	0.1394E-03	0.1578E-03	0.5290E-04
-0.1823E-04	0.2313E-03	-0.2024E-04	-0.1124E-03	0.2040E-03	-0.1596E-03
0.2683E-03	0.5947E-04	0.1394E-04	-0.1106E-05	0.2115E-04	-0.2767E-03
-0.1568E-03	-0.1933E-03	-0.4269E-04	0.1086E-03	0.1859E-04	-0.1813E-03
0.1258E-03	0.7223E-05	-0.1461E-03	-0.6036E-04	-0.1346E-04	0.1136E-03
-0.1766E-03	-0.3456E-03	-0.1113E-04	0.1730E-03	0.6598E-04	0.2373E-03
0.1320E-04	-0.1474E-04	0.9100E-04	-0.3979E-03	-0.1863E-03	0.1334E-03
-0.6894E-04	0.1437E-03	0.1376E-03	0.2100E-04	-0.1820E-03	0.6265E-04
-0.2098E-04	0.4103E-04	0.2585E-03	-0.1725E-03	0.1967E-04	-0.7575E-04
0.2325E-03	-0.1069E-03	0.6733E-04	0.1356E-03	0.1701E-03	-0.5418E-04
0.1003E-03	0.9430E-04	-0.1362E-03	0.2972E-04	0.7280E-04	-0.3206E-03
-0.1307E-03	0.1157E-03	0.6809E-04	0.1486E-03	-0.2310E-03	0.8839E-04
-0.1933E-03	0.2942E-03	-0.1558E-03	0.2581E-03	0.8866E-04	0.6660E-04
0.1708E-03	-0.1815E-03	0.2186E-03	0.4418E-03	-0.1750E-03	-0.7762E-04
-0.4750E-04	-0.8858E-04	-0.3206E-04	-0.2968E-03	0.1703E-03	0.1405E-03
0.1123E-04	-0.2205E-03	0.2773E-04	-0.3326E-03	-0.9895E-04	-0.1628E-03
0.1810E-03	-0.5270E-04	-0.2927E-03	-0.5539E-04	0.1102E-03	0.1822E-03
-0.1112E-03	-0.8185E-04	0.1746E-03	0.8708E-04	-0.3209E-04	0.1751E-03
-0.2059E-03	0.6297E-04	0.4446E-03	-0.1632E-03	-0.2035E-03	0.9173E-04

0.4237E-03,	0.1212E-03,	-0.1233E-03,	-0.1306E-03,	0.1538E-03,	0.3340E-05,
-0.1359E-03,	0.1030E-03,	-0.1245E-03,	-0.1546E-03,	0.1168E-03,	0.4285E-05,
-0.2034E-03,	0.6500E-05,	-0.2829E-03,	0.1125E-03,	0.5145E-04,	-0.2736E-03,
-0.3912E-04,	-0.9471E-04,	-0.4033E-05,	-0.7558E-04,	-0.1314E-04,	-0.9053E-04,
0.7422E-04,	-0.1106E-03,	-0.2480E-03,	0.2198E-03,	-0.2592E-04,	0.1706E-03,
0.1955E-03,	0.2283E-03,	-0.7112E-04,	0.4502E-04,	0.9629E-04,	-0.5046E-04,
0.2750E-03,	0.1752E-05,	0.1100E-03,	-0.1512E-03,	0.7073E-05,	-0.9661E-04,
0.2762E-03,	-0.1589E-03,	0.1327E-03,	-0.2366E-03,	0.7073E-04,	-0.9566E-04,
-0.4363E-03,	0.1560E-03,	0.3060E-03,	0.2352E-03,	0.2095E-03,	-0.6630E-04,
-0.9828E-04,	-0.1945E-03,	0.1240E-04,	0.3352E-03,	-0.1223E-04,	0.1165E-03,
-0.1529E-03,	-0.2794E-03,	-0.9257E-04,	0.1148E-04,	-0.5414E-03,	-0.3558E-03,
-0.5801E-04,	-0.3229E-04,	0.2937E-03,	-0.9774E-04,	-0.2426E-04,	0.3181E-03,
0.9628E-04,	0.2067E-04,	0.1409E-03,	0.6400E-04,	-0.1653E-03,	0.5674E-04,
-0.1490E-03,	0.3405E-03,	-0.1138E-03,	-0.1998E-03,	0.1173E-03,	-0.1428E-03,
0.5089E-04,	0.9984E-05,	-0.6944E-04,	0.9821E-04,	0.5719E-04,	-0.6300E-04,
-0.1966E-04,	-0.2339E-03,	-0.1961E-03,	-0.1911E-04,	0.9857E-04,	0.6436E-04,
-0.2430E-04,	0.1464E-03,	0.1260E-03,	0.1791E-05,	-0.1041E-03,	0.6754E-04,
0.1989E-03,	-0.1372E-04,	0.2937E-04,	-0.1286E-03,	0.9951E-04,	0.1980E-03,
0.3129E-03,	0.9452E-04,	0.2856E-06,	-0.2044E-03,	0.2875E-03,	0.1825E-03,
0.2939E-04,	-0.2019E-03,	-0.6493E-04,	0.8343E-04,	-0.2602E-03,	0.2323E-03,
-0.1683E-03,	0.6487E-04,	-0.8466E-04,	0.4995E-04,	0.5275E-05,	0.2345E-03,
0.1677E-03,	0.1317E-03,	0.8003E-04,	0.4976E-04,	-0.1839E-03,	-0.7435E-03,
-0.3177E-03,	0.1465E-03,	0.9977E-04,	-0.8990E-04,	-0.5701E-04,	-0.2700E-03,
-0.1629E-03,	0.4525E-03,	-0.3652E-03,	0.1912E-03,	0.9906E-04,	-0.9352E-04,
0.1124E-03,	-0.1919E-03,	0.1624E-03,	-0.6747E-04,	-0.7105E-04,	0.1332E-03,
0.8319E-04,	-0.3543E-03,	-0.9886E-04,	-0.3746E-03,	0.6577E-04,	0.2173E-04,
-0.9365E-04,	-0.3789E-04,	0.1742E-03,	-0.1419E-03,	0.1425E-03,	0.4896E-04,
-0.3216E-03,	-0.2941E-03,	0.7228E-04,	0.5850E-03,	0.2035E-03,	0.1423E-03,
-0.3671E-04,	-0.2829E-03,	0.1542E-03,	-0.4616E-04,	0.2047E-03,	0.1772E-03,
0.1234E-03,	0.1814E-03,	0.5562E-04,	0.1136E-03,	-0.2422E-03,	-0.6151E-04,
0.3257E-03,	0.1253E-03,	0.2220E-03,	-0.4571E-04,	-0.7483E-04,	0.1479E-03,
0.2365E-03,	0.3411E-03,	-0.3296E-03,	0.2428E-03,	0.1150E-03,	0.2934E-03,
0.1235E-03,	0.4121E-03,	-0.2197E-04,	0.2044E-04,	0.1358E-03,	-0.8254E-04,
0.7806E-04,	0.4068E-04,	-0.3369E-03,	0.8814E-04,	-0.3114E-03,	-0.4759E-03,
0.2727E-03,	-0.2912E-03,	0.2716E-03,	-0.2089E-03,	-0.3600E-03,	0.5737E-04,
-0.2020E-03,	-0.1042E-03,	0.1843E-03,	-0.5684E-03,	-0.1825E-03,	-0.5495E-03,
-0.3257E-03,	-0.2135E-03,	-0.2754E-03,	-0.3013E-03,	0.1114E-03,	0.2509E-03
!					
...					
-0.3797E-02,	0.2132E-02,	0.4854E-02,	-0.1462E-03,	0.3765E-02,	0.4213E-02,
0.4394E-03,	-0.1436E-02,	-0.5116E-02,	-0.9623E-02,	-0.1245E-02,	-0.6084E-02,
0.1891E-02,	-0.4762E-02,	0.3460E-02,	0.5691E-02,	-0.5287E-02,	0.9177E-02,
-0.2597E-02,	0.5417E-02,	0.8954E-02,	-0.7220E-02,	0.5763E-02,	-0.6887E-02,
0.7509E-02,	-0.2908E-02,	-0.1269E-01,	0.6101E-02,	-0.6627E-02,	0.4308E-02
!					

-0.2254E-02,	-0.1768E-01,	0.1966E-01,	-0.3997E-02,	0.3407E-03,	0.3283E-02,
-0.1946E-02,	-0.6022E-02,	0.9533E-02,	-0.4816E-02,	-0.2945E-02,	0.8654E-03,
-0.1512E-02,	0.1172E-02,	0.4945E-02,	-0.6058E-02,	-0.8818E-03,	0.2617E-03,
0.1406E-02,	0.3864E-02,	0.2364E-02,	-0.4831E-02,	-0.1463E-02,	-0.4613E-03,
0.1596E-02,	0.4957E-02,	-0.1537E-02,	-0.5837E-02,	-0.2920E-03,	-0.1539E-02,
-0.3569E-02,	0.1346E-02,	-0.1683E-02,	-0.1215E-02,	-0.1140E-02,	-0.1463E-02,
-0.3534E-03,	-0.2717E-02,	-0.4249E-04,	0.1283E-02,	0.9055E-03,	0.9297E-03,
0.1312E-02,	0.1910E-02,	-0.3736E-02,	-0.2075E-03,	-0.1575E-04,	0.3937E-03,
0.3123E-02,	0.1532E-02,	-0.1622E-02,	0.2157E-02,	0.2963E-03,	0.5909E-04,
0.7263E-03,	-0.5004E-03,	0.7521E-03,	0.2342E-02,	-0.4329E-03,	-0.4055E-03,
0.1556E-02,	-0.9988E-03,	0.5689E-03,	0.2893E-04,	-0.1298E-03,	0.2957E-03,
-0.6951E-03,	-0.2123E-03,	0.1546E-02,	0.5908E-03,	0.1149E-03,	0.4160E-03,
-0.2763E-03,	-0.1435E-02,	0.1314E-02,	0.6277E-03,	-0.4432E-03,	-0.1359E-04,
...					
-0.1488E-04,	-0.8043E-05,	-0.1473E-04,	-0.3554E-04,	0.3786E-05,	0.1844E-04,
-0.5390E-05,	-0.1480E-04,	-0.1766E-04,	0.6611E-05,	-0.2056E-04,	-0.1655E-04,
-0.1537E-04,	-0.3180E-05,	0.6927E-05,	0.1837E-05,	0.9762E-05,	-0.2585E-04,
0.2101E-05,	0.3921E-05,	0.1032E-04,	0.1256E-04,	-0.1087E-04,	0.1651E-04,
-0.2047E-04,	-0.7555E-05,	-0.7678E-05,	-0.1169E-04,	-0.1884E-05,	0.1802E-05,
0.8244E-05,	-0.7725E-06,	-0.4716E-05,	0.7150E-05,	-0.1421E-04,	0.5794E-05,
0.2136E-04,	0.2774E-04,	-0.1372E-04,	-0.2053E-05,	0.1664E-04,	-0.5379E-05,
0.2130E-04,	0.1195E-04,	0.1360E-04,	-0.1726E-04,	0.9991E-05,	-0.1942E-04,
0.2566E-05,	-0.2178E-04,	0.1304E-05,	0.1866E-04,	0.1727E-05,	0.1424E-04
!					\$

3.4 Level 2 data – SA- Automatic Gain Control (AGC)

3.4.1 Format: CEF

3.4.2 Standard: cf 2.2.

3.4.3 Production Procedure: cf 2.3.1.

3.4.4 Quality Control Procedure: cf 2.4.1.

3.4.5 Delivery Procedure

Secured ftp from LPP (lantana.lpp.polytechnique.fr) to ESTEC (caa.estec.esa.int).

3.4.6 Product Specification

One CEF file per day and per satellite is produced.

The CEF file contains the average power spectral density in the passband of the analogue receivers derived from the Automatic Gain Control signal. This is measured in the three large passbands with 1s time resolution, for the axial component of the magnetic field, and the sums of the spins plane components of the magnetic and of the electric field.

Data are separated in two variables, one for the magnetic AGC, one for the electric AGC.

- B__C1/C2/C3/C4_CP_STA_AGC. They are given in nT² Hz⁻¹ units.
- E__C1/C2/C3/C4_CP_STA_AGC. They are given in mV² m⁻² Hz⁻¹ units.

3.4.7 Dataset metadata description

The CEF file version 07 includes a detached dataset header called: **C1/C2/C3/C4_CH_STA_AGC.ceh**.

The introduction of dataset header gives the possibility to upload caveat files in the future and can be easily updated.

In this header, only the static parameters (global metadata, support data and data themselves description) are included.

First, the following **global metadata** keywords:

- DATASET_ID = "C1/C2/C3/C4_CP_STA_AGC"
- DATA_TYPE = "CP"
- DATASET_TITLE = "Automatic Gain Control"
- CONTACT_COORDINATES =
"Rodrigue Piberne>Archive Manager>rodrigue.piberne@lpp.polytechnique.fr
Olga Alexandrova>Co-I >olga.alexandrova@obspm.fr
Ondrej Santolik>Co-I>ondrej.santolik@mff.cuni.cz"
- DATASET_DESCRIPTION = "Average power spectral density in the passband of the analogue receivers derived from the Automatic Gain Control signal. This is measured in three large passbands for the axial component of the magnetic field, and the sums of the spin plane components of the magnetic and of the electric field. The time resolution can vary between 0.125 and 0.250s in High Bit Rate and usually 1s (exceptionally 0.5 and 2s) in Normal Bit Rate telemetry mode."
- PROCESSING_LEVEL = "Calibrated"
- TIME_RESOLUTION = 1.0
- MIN_TIME_RESOLUTION = 2.0
- MAX_TIME_RESOLUTION = 0.125
- DATASETS_CAVEATS = "*C1_CQ_STA_AGC_CAVEATS Version 07 :
New calibration tables plus addition of the interval duration and status.
Removal of onboard calibration data. Warning to the users of versions lower than 07: Delta_plus of Time__C1_CP_STA_AGC variables is set to a fixed value instead of a value varying with the mode. This chosen fixed value is the usual minimum time resolution (1s) which is correct in most of the time (Normal Bit Rate). The time resolution is better in High Bit Rate. Note that the data themselves are correct. Version 04 : All the headers have been updated (laboratory name and email). Introduction of a new header file (Dataset). Version 03 : The data were time tagged using TED version 2.4.3 (TED Library 4.4.3 User Patch 1), provided by the Sheffield DWP Group. Version 02 : Obsolete. Should not be used ! Version 01 : Obsolete. Should not be used !"

- Then, the following **Support data**:

Data are indexed by the **following variables**:

&Time which is the time tag. Its properties are:

- PARAMETER_TYPE = "Support_Data"
- CATDESC = "Interval time tag"
- UNITS = "s"
- SI_CONVERSION = "1.0>s"
- SIZES = 1
- VALUE_TYPE = ISO_TIME
- SIGNIFICANT_DIGITS = 24
- FILLVAL = 9999-12-31T23:59:59.999Z
- FIELDNAM = "UT Time"
- LABLAXIS = "UT"
- DELTA_MINUS = 0.
- DELTA_PLUS = Duration__C1_CP_STA_SM

&Duration defining the time interval between two measurements:

- CATDESC = "Interval duration"
- FIELDNAM = "Interval duration"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_AGC
- FILLVAL = 9.999
- LABLAXIS = "s"
- PARAMETER_TYPE = "Support_Data"
- SI_CONVERSION = "1.0>s"
- SIGNIFICANT_DIGITS = 4
- UNITS = "s"
- VALUE_TYPE = FLOAT
- SIZES = 1

&Status defining the nine characters STAFF-SA status:

- CATDESC = "STAFF-SA Status"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_AGC
- FIELDNAM = "STAFF-SA Status"
- FILLVAL = ZZZZZZZZ
- LABEL_1 = "Status"
- LABLAXIS = "Status"
- PARAMETER_CAVEATS = "First nine characters of STAFF Status. See UG, Appendix C. We cannot certify the 9th character (EFW Sweep)"
- PARAMETER_TYPE = "Support_Data"
- QUALITY = 1
- SIGNIFICANT_DIGITS = 9
- SIZES = 1
- UNITS = "unitless"
- VALUE_TYPE = CHAR

&Frequency defining the centres of the 3 frequency bands:

- PARAMETER_TYPE = "Support_Data"
- CATDESC = "Interval centred frequency tag"
- UNITS = "Hz"
- SI_CONVERSION = "1.0>Hz"
- SIZES = 3

- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 4
- FILLVAL = -999.99
- FIELDNAM = "Frequency bin centres"
- LABLAXIS = "F"
- LABEL_1 = "A","B","C" ! 3 bands
- DELTA_PLUS = Frequency_BHW__C1/C2/C3/C4_CP_STA_AGC
- DELTA_MINUS = Frequency_BHW__C1/C2/C3/C4_CP_STA_AGC
- SCALETYP = Log
- DATA = 34.9226,279.3811,2235.0488

&Frequency_BHW which is the half width of the 3 frequency bands :

- PARAMETER_TYPE = "Support_Data"
- CATDESC = "Frequency bin half widths"
- UNITS = "Hz"
- SI_CONVERSION = "1.0>Hz"
- SIZES = 3
- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 3
- FILLVAL = -999.99
- FIELDNAM = "Frequency bin half widths"
- LABLAXIS = "F_bhw"
- LABEL_1 = "A_bhw","B_bhw","C_bhw"
- SCALETYP = Log
- DATA = 27.1618,217.2948,1738.3584

Data themselves

&The magnetic AGC B :

- PARAMETER_TYPE = "Data"
- ENTITY = "Magnetic_Field"
- PROPERTY = "Component"
- FLUCTUATIONS = "Mean_Square_Level"
- CATDESC = "Magnetic AGC"
- UNITS = "nT² Hz⁻¹"
- SI_CONVERSION = "1.0e-18>T² Hz⁻¹"
- TENSOR_ORDER = 0
- TENSOR_FRAME = "SR2"
- FRAME = "ISR2>xyz"
- COORDINATE_SYSTEM = "SR2"
- SIZES = 3,2 ! 3 frequency bins x 2 components
- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 3
- FILLVAL = -1.00E+31
- FIELDNAM = "Magnetic AGC"
- LABLAXIS = "Magnetic AGC"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_AGC
- DEPEND_1 = Frequency__C1/C2/C3/C4_CP_STA_AGC

- LABEL_2 = "Bz","Bxy"
- QUALITY = 0

&The Electric AGC E :

- PARAMETER_TYPE = "Data"
- ENTITY = "Electric_Field"
- PROPERTY = "Component"
- FLUCTUATIONS = "Mean_Square_Level"
- CATDESC = "Electric AGC"
- UNITS = "mV² m⁻² Hz⁻¹"
- SI_CONVERSION = "1.0E-6> V² m⁻² Hz⁻¹"
- TENSOR_ORDER = 0
- TENSOR_FRAME = "SR2"
- FRAME = "SR2>xyz"
- COORDINATE_SYSTEM = "SR2"
- SIZES = 3 ! 3 frequency bins x 1 components
- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 3
- FILLVAL = -1.00E+31
- FIELDNAM = "Electric AGC"
- LABLAXIS = "Electric AGC"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_AGC
- DEPEND_1 = Frequency__C1/C2/C3/C4_CP_STA_AGC
- LABEL_2 = "Exy"
- QUALITY = 0

3.4.8 File Metadata Specification

The version 07 CEF file includes a detached dataset header called: **C1/C2/C3/C4_CH_STA_AGC.ceh** described above.

For the version 0, the CEF file header contains now only the static parameters (file and global metadata):

- The following **file metadata** keywords:

- FILE_NAME = C1/C2/C3/C4_CP_STA_AGC __20070101_V04.cef
- FILE_FORMAT_VERSION = "CEF-2.0"
- END_OF_RECORD_MARKER = "\$"

- And the following **global metadata** keywords:

- FILE_TYPE = "cef"
- DATASET_VERSION = "04"
- LOGICAL_FILE_ID = "C1/C2/C3/C4_CP_STA_AGC __20070101_V04"
- VERSION_NUMBER = "04"
- METADATA_TYPE = "CAA"
- METADATA_VERSION = "2.0"

- FILE_TIME_SPAN = 2007-01-01T00:00:00.000Z/2007-01-01T23:59:59.999Z
- GENERATION_DATE = ex. 2009-09-13T09:52:11.000Z
- FILE_CAVEATS = "Release V04 of STAFF-SA CAA Data. Ted version 2.4.3 with lib 4.4.3 User patch 1. STAFF-SA Processing software with C1_CT_STASA_20010110_V003.cal. Prassadco software: Module Read_N2SA (2002Dec16). Caa software version 2.0 of July 2009"

3.4.9 Dataset header example

Example: C1_CH_STA_AGC.keh

```
!CEH VALIDATION 12 Jan 2015 by LPP, header V08, (PC, NCW, RP, RK)
!
START META = DATASET ID
  ENTRY = "C1 CP STA AGC"
END META = DATASET ID
!
START META = DATA TYPE
  ENTRY = "CP"
END META = DATA TYPE
!
START META = DATASET TITLE
  ENTRY = "Automatic Gain Control"
END META = DATASET TITLE
!
START META = CONTACT COORDINATES
  ENTRY = "Olga Alexandrova>Co-I>olga.alexandrova@obspm.fr"
END META = CONTACT COORDINATES
!
START META = DATASET DESCRIPTION
  ENTRY = "Average power spectral density in the passband of the analogue"
  ENTRY = "receivers derived from the Automatic Gain Control signal."
  ENTRY = "This is measured in three large passbands"
  ENTRY = "for the axial component of the magnetic field, and the sums"
  ENTRY = "of the spin plane components of the magnetic and of the electric field."
  ENTRY = "The time resolution"
  ENTRY = "can vary between 0.125 and 0.250s in"
  ENTRY = "High Bit Rate and usually 1s (exceptionally"
  ENTRY = "0.5 and 2s) in Normal Bit Rate telemetry mode."
END META = DATASET DESCRIPTION
!
START META = TIME RESOLUTION
  ENTRY = 1.0
END META = TIME RESOLUTION
!
START META = MIN TIME RESOLUTION
  ENTRY = 2.0
END META = MIN TIME RESOLUTION
!
START META = MAX TIME RESOLUTION
  ENTRY = 0.125
END META = MAX TIME RESOLUTION
!
START META = PROCESSING LEVEL
  ENTRY = "Calibrated"
END META = PROCESSING LEVEL
!
START META = DATASET CAVEATS
  ENTRY = "*C1 CQ STA AGC CAVEATS"
  ENTRY = "Version 07 : New calibration tables plus addition of the interval "
  ENTRY = "duration and status. Removal of onboard calibration data."
  ENTRY = "Warning to the users of versions lower than 07:"
  ENTRY = "Delta plus of Time C1 CP STA AGC variables is set to a fixed value"
  ENTRY = "instead of a value varying with the mode."
  ENTRY = "This chosen fixed value is the usual minimum time resolution (1s)"
  ENTRY = "which is correct in most of the time (Normal Bit Rate)."
  ENTRY = "The time resolution is better in High Bit Rate."
  ENTRY = "Note that the data themselves are correct."
  ENTRY = "Version 04 : All the headers have been updated (laboratory name "
  ENTRY = "and email). Introduction of a new header file (Dataset). "
  ENTRY = "Version 03 : The data were time tagged using TED version 2.4.3"
  ENTRY = "(TED Library 4.4.3 User Patch 1), provided by the Sheffield DWP Group."
  ENTRY = "Version 02 : Obsolete. Should not be used !"
```

```
ENTRY = "Version 01 : Obsolete. Should not be used !"
END META = DATASET CAVEATS
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                                      Variables   !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
START VARIABLE = Time  C1 CP STA AGC
PARAMETER TYPE       = "Support Data"
CATDESC              = "Interval Start time tag"
UNITS                 = "s"
SI CONVERSION        = "1.0>s"
SIZES                 = 1
VALUE TYPE           = ISO TIME
SIGNIFICANT DIGITS   = 24
FILLVAL              = 9999-12-31T23:59:59.999Z
FIELDNAM             = "UT Time"
LABLAXIS             = "UT"
DELTA MINUS          = 0.0
DELTA PLUS           = Duration  C1 CP STA AGC
END VARIABLE = Time  C1 CP STA AGC
!
START VARIABLE = Duration  C1 CP STA AGC
CATDESC          = "Interval duration"
FIELDNAM         = "Interval duration"
DEPEND 0         = Time  C1 CP STA AGC
FILLVAL          = 9.999
LABLAXIS         = "s"
PARAMETER TYPE   = "Support Data"
SI CONVERSION    = "1.0>s"
SIGNIFICANT DIGITS = 4
UNITS            = "s"
VALUE TYPE       = FLOAT
SIZES            = 1
END VARIABLE = Duration  C1 CP STA AGC
!
START VARIABLE = Status  C1 CP STA AGC
CATDESC        = "STAFF-SA Status"
DEPEND 0       = Time  C1 CP STA AGC
FIELDNAM       = "STAFF-SA Status"
FILLVAL        = ZZZZZZZZ
LABEL 1        = "Status"
LABLAXIS       = "Status"
PARAMETER CAVEATS = "First nine characters of STAFF Status. See UG, Appendix C. \
                    We cannot certify the 9th character (EFW Sweep)"
PARAMETER TYPE = "Support Data"
QUALITY        = 1
SIGNIFICANT DIGITS = 9
SIZES          = 1
UNITS          = "unitless"
VALUE TYPE     = CHAR
END VARIABLE = Status  C1 CP STA AGC
!
START VARIABLE = Frequency  C1 CP STA AGC
PARAMETER TYPE       = "Support Data"
CATDESC              = "Interval centred frequency tag"
UNITS                 = "Hz"
SI CONVERSION        = "1.0>Hz"
SIZES                 = 3
VALUE TYPE           = FLOAT
SIGNIFICANT DIGITS   = 4
FILLVAL              = -999.99
FIELDNAM             = "Frequency bin centres"
LABLAXIS             = "F"
LABEL 1              = "A", "B", "C"
DELTA PLUS           = Frequency BHW  C1 CP STA AGC
DELTA MINUS          = Frequency BHW  C1 CP STA AGC
SCALETYP             = Log
DATA                 = 34.9226, 279.3811, 2235.0488
END VARIABLE = Frequency  C1 CP STA AGC
!
START VARIABLE = Frequency BHW  C1 CP STA AGC
PARAMETER TYPE       = "Support Data"
CATDESC              = "Frequency bin half widths"
UNITS                 = "Hz"
SI CONVERSION        = "1.0>Hz"
SIZES                 = 3
VALUE TYPE           = FLOAT
SIGNIFICANT DIGITS   = 3
FILLVAL              = -999.99
FIELDNAM             = "Frequency bin half widths"
LABLAXIS             = "F bhw"
LABEL 1              = "A bhw", "B bhw", "C bhw"
SCALETYP             = Log
```


3.5 Level 2 data - SA - Power Spectral Density Files (PSD)

3.5.1 Format: CEF

3.5.2 Standard: cf 2.2.

3.5.3 Production Procedure: cf 2.3.2.

3.5.4 Quality Control Procedure: cf 2.4.2.

3.5.5 Delivery Procedure

Secured ftp from LPP (lantana.lpp.polytechnique.fr) to ESTEC (caa.estec.esa.int).

3.5.6 Product Specification

One CEF file per day and per satellite is produced.

This CEF file contains the Power Spectral Densities values for the magnetic and the electric field.

$$\begin{pmatrix} B_x^2 & B_x \cdot B_y^* & B_x \cdot B_z^* & B_x \cdot E_x^* & B_x \cdot E_y^* \\ B_y \cdot B_x^* & B_y^2 & B_y \cdot B_z^* & B_y \cdot E_x^* & B_y \cdot E_y^* \\ B_z \cdot B_x^* & B_z \cdot B_y^* & B_z^2 & B_z \cdot E_x^* & B_z \cdot E_y^* \\ E_x \cdot B_x^* & E_x \cdot B_y^* & E_x \cdot B_z^* & E_x^2 & E_x \cdot E_y^* \\ E_y \cdot B_x^* & E_y \cdot B_y^* & E_y \cdot B_z^* & E_y \cdot E_x^* & E_y^2 \end{pmatrix}$$

Data are separated into two variables, one for the magnetic components and another for the electric ones:

- BB_C1_CP_STA_PSD is the float variable defined for the B_x^2 , B_z^2 and B_z^2 values (where C1 stands for satellite 1 in this example), they are given in $\text{nT}^2\text{Hz}^{-1}$ units.
- EE_C1_CP_STA_PSD is the float variable defined for the E_x^2 and E_y^2 values they are given in $\text{mV}^2\text{m}^{-2}\text{Hz}^{-1}$ units.

Each variable is sampled for 27 ranges of frequencies described in the Dimension_F_C1_CP_STA_PSD variable which summarizes the 27 bin centres (given in Hz).

This variable is linked to the Dimension_F_bin_half_width_C1_CP_STA_PSD variable which gives the half width of each bin.

Data are given in SR2 coordinate system. Note that coordinate transformation is not allowed since the information that is mandatory for such an operation is unknown.

3.5.7 Dataset metadata description

The CEF file version 07 includes a detached dataset header called: **C1/C2/C3/C4_CH_STA_PSD.ceh**.

The introduction of dataset header gives the possibility to upload caveat files in the future and can be easily updated.

In this header, only the static parameters (global metadata, support data and data themselves description) are included.

- First, the following **global metadata** keywords:

- DATASET_ID = C1/C2/C3/C4_CP_STA_PSD
- DATA_TYPE = "CP"
- DATASET_TITLE = "Power Spectral Density (1s resolution)"
- CONTACT_COORDINATES =
"Rodrigue Piberne>Archive Manager>rodrigue.piberne@lpp.polytechnique.fr
Olga Alexandrova>Co-I >olga.alexandrova@obspm.fr
Ondrej Santolik>Co-I>ondrej.santolik@mff.cuni.cz"
- DATASET_DESCRIPTION = "This dataset contains 1s resolution Power Spectral Density measurements of three SR2 components of the magnetic field and two components of the electric field at 27 frequencies distributed logarithmically between 8 HZ and 4 kHz."
- PROCESSING_LEVEL = "Calibrated"
- TIME_RESOLUTION = 1.0
- MIN_TIME_RESOLUTION = 2.0
- MAX_TIME_RESOLUTION = 0.125
- DATASET_CAVEATS = "*C1_CQ_STA_NOTSRP_CAVEATS Version 07 :
New calibration tables plus addition of the interval duration and status.
Removal of onboard calibration data. Warning to the users of versions lower than 07: Delta_plus of Time__C1_CP_STA_PSD variables is set to a fixed value instead of a value varying with the mode. This chosen fixed value is the usual minimum time resolution (1s) which is correct in most of the time (Normal Bit Rate). The time resolution is better in High Bit Rate. Note that the data themselves are correct. Version 04 : All the headers have been updated (laboratory name and email). Introduction of a new header file (Dataset). The PSD negative values in the version 03 have been replaced by the fillvalue (-1.00E+31). Version 03: The data were time tagged using TED version 2.4.3 (TED Library 4.4.3 User Patch 1), provided by the Sheffield DWP Group. Phase rotation corrected + exhaustive data. Older versions are obsolete and should not be used ! The negative values must not be taken into account by the users. Version 02 : Obsolete. This version may be used if Version 03 is not available, as long as only total B and total E power are used ! Version 01 : Obsolete. Should not be used !"

- Then, the following **Support data**:

Data are indexed by the **following variables**:

& Time which the ISO time of data acquisition (Universal Time). Its properties are:

- PARAMETER_TYPE = "Support_Data"
- CATDESC = "Interval time tag"
- UNITS = "s"
- SI_CONVERSION = "1.0>s"
- SIZES = 1
- VALUE_TYPE = ISO_TIME
- SIGNIFICANT_DIGITS = 24
- FILLVAL = 9999-99-99T99:99:99.999Z
- FIELDNAM = "UT Time"
- LABLAXIS = "UT"
- DELTA_MINUS = 0.
- DELTA_PLUS = Duration__C1_CP_STA_SM

&Duration defining the time interval between two measurements:

- CATDESC = "Interval duration"
- FIELDNAM = "Sampling interval length"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_PSD
- FILLVAL = 9.999
- LABLAXIS = "s"
- PARAMETER_TYPE = "Support_Data"
- SI_CONVERSION = "1.0>s"
- SIGNIFICANT_DIGITS = 4
- UNITS = "s"
- VALUE_TYPE = FLOAT
- SIZES = 1

&Status defining the nine characters STAFF-SA status:

- CATDESC = "STAFF-SA Status"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_PSD
- FIELDNAM = "STAFF-SA Status"
- FILLVAL = ZZZZZZZZ
- LABEL_1 = "Status"
- LABLAXIS = "Status"
- PARAMETER_CAVEATS = "First nine characters of STAFF Status. See UG, Appendix C. We cannot certify the 9th character (EFW Sweep)"
- PARAMETER_TYPE = "Support_Data"
- QUALITY = 1
- SIGNIFICANT_DIGITS = 9
- SIZES = 1
- UNITS = "unitless"
- VALUE_TYPE = CHAR

&Frequency represents the 27 frequency bin centres expressed in Hz. Each bin is sized by the Frequency_BHW__C?_CP_STA_PSD which expresses the half width of the bin (=DELTA_MINUS and DELTA_PLUS):

system ('COORDINATE_SYSTEM = "SR2") is limited to "xx", "yy" and "zz" ('REPRESENTATION = xx" "yy" "zz") :

- PARAMETER_TYPE = "Data"
- ENTITY = "Magnetic Field"
- PROPERTY = "Vector"
- FLUCTUATIONS = "Wavelet_Power-spectrum"
- CATDESC = "Power spectrum 8-4000 Hz of the B-field components along the SR2 coordinate axes"
- UNITS = "nT²Hz⁻¹"
- SI_CONVERSION = "1.0E-18>T²Hz⁻¹"
- TENSOR_ORDER = 2
- TENSOR_FRAME = SR2
- FRAME SR2
- COORDINATE_SYSTEM SR2
- SIZES = 27,3 ! 27 frequency bins x 3 components
- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 3
- FILLVAL = -1.00E+31
- FIELDNAM = "Magnetic Power Spectral Density"
- LABLAXIS = "Magnetic Power Spectral Density"
- REPRESENTATION_2 = "xx","yy","zz"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_PSD
- DEPEND_1 = Frequency__C1/C2/C3/C4_CP_STA_PSD
- LABEL_2 = "Bx²","By²","Bz²"
- QUALITY = 0

&EE_xxyy_SR2_C1/C2/C3/C4_CP_STA_PSD variable stores the electric components of the power spectral density is an incomplete tensor of order 2. Since only E_x^2 and E_y^2 are present, its representation in SR2coordinate system is limited to "xx" and "yy":

- PARAMETER_TYPE = "Data"
- ENTITY = "Electric Field"
- PROPERTY = "Vector"
- FLUCTUATIONS = "Wavelet_Power-spectrum"
- CATDESC = "Power spectrum 8-4000 Hz of the E-field components along the ISR coordinate axes"
- UNITS = "mV² m⁻² Hz⁻¹"
- SI_CONVERSION = "1.0E-6>V² 2m⁻² Hz⁻¹"
- TENSOR_ORDER = 2
- TENSOR_FRAME = "SR2"
- FRAME = "SR2 >xyz"
- COORDINATE_SYSTEM = "SR2"
- SIZES = 27,2 ! 27 frequency bins x 2 components
- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 3
- FILLVAL = -1.00E+31
- FIELDNAM = "Electrical Power Spectral Density"
- LABLAXIS = "Electrical Power Spectral Density"

- REPRESENTATION_2 = "xx","yy"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_PSD
- DEPEND_1 = Frequency__C1/C2/C3/C4_CP_STA_PSD
- LABEL_2 = "Ex^2","Ey^2"
- QUALITY = 0

3.5.8 File Metadata Specification

The version 4 CEF file includes a detached dataset header called: **C1/C2/C3/C4_CH_STA_PSD.ceh** described above.

For the version 04, the CEF contains now only the static parameters (file and global metadata).

- The following file **metadata** keywords:

- FILE_NAME = C1/C2/C3/C4_CP_STA_PSD__20010419_V04.cef
- FILE_FORMAT_VERSION = "CEF-2.0"
- END_OF_RECORD_MARKER = "\$"

- And the following **global metadata** keywords:

- FILE_TYPE = "cef"
- LOGICAL_FILE_ID = "C1/C2/C3/C4_CP_STA_PSD__20070101_V04"
- DATASET_VERSION = "04"
- VERSION_NUMBER = "04"
- METADATA_TYPE = "CAA"
- METADATA_VERSION = "2.0"
- FILE_TIME_SPAN = ex. 2007-01-01T00:00:00.000Z/2007-01-01T23:59:59.999Z
- GENERATION_DATE = ex. 2009-09-20T15:20:11.000Z
- FILE_CAVEATS = "Release V04 of STAFF-SA CAA Data. Ted version 2.4.3 with lib 4.4.3 User patch 1. STAFF-SA Processing software with C1_CT_STASA_20010110_V003.cal. Prassadco software: Module Read_N2SA (2002Dec16). Caa software version 2.0 of July 2009"

3.5.9 Dataset header example

Example: C1_CH_STA_PSD.ceh

```
!CEH VALIDATION 12 Jan 2015 by LPP, header V07, (PC, NCW, RP, RK)
!
START META = DATASET ID
  ENTRY = "C1 CP STA PSD"
END META = DATASET ID
!
START META = DATA TYPE
  ENTRY = "CP"
END META = DATA TYPE
!
START META = DATASET TITLE
  ENTRY = "Power Spectral Density (8 Hz - 4 kHz)"
```

```

END META = DATASET TITLE
!
START META = CONTACT COORDINATES
  ENTRY = "Rodrigue Piberne>Archive Manager>rodrigue.piberne@lpp.polytechnique.fr"
  ENTRY = "Olga Alexandrova>Co-I>olga.alexandrova@obspm.fr"
  ENTRY = "Ondrej Santolik>Co-I>ondrej.santolik@mff.cuni.cz"
END META = CONTACT COORDINATES
!
START META = DATASET DESCRIPTION
  ENTRY = "Power Spectral Density measurements of three"
  ENTRY = "components of the magnetic field and two components"
  ENTRY = "of the electric field in SR2 reference frame,"
  ENTRY = "at 27 frequencies logarithmically distributed"
  ENTRY = "between 8 Hz and 4 kHz. The time resolution"
  ENTRY = "can vary between 0.125 and 0.250s in"
  ENTRY = "High Bit Rate and usually 1s (exceptionally"
  ENTRY = "0.5 and 2s) in Normal Bit Rate telemetry mode."
END META = DATASET DESCRIPTION
!
START META = TIME RESOLUTION
  ENTRY = 1.0
END META = TIME RESOLUTION
!
START META = MIN TIME RESOLUTION
  ENTRY = 2.0
END META = MIN TIME RESOLUTION
!
START META = MAX TIME RESOLUTION
  ENTRY = 0.125
END META = MAX TIME RESOLUTION
!
START META = PROCESSING LEVEL
  ENTRY = "Calibrated"
END META = PROCESSING LEVEL
!
START META = DATASET CAVEATS
  ENTRY = "*C1 CQ STA NOTSRP CAVEATS"
  ENTRY = "Version 07 : New calibration tables plus addition of the interval "
  ENTRY = "duration and status. Removal of onboard calibration data."
  ENTRY = "Warning to the users of versions lower than 07:"
  ENTRY = "Delta plus of Time C1 CP STA PSD variables is set to a fixed value"
  ENTRY = "instead of a value varying with the mode."
  ENTRY = "This chosen fixed value is the usual minimum time resolution (1s)"
  ENTRY = "which is correct in most of the time (Normal Bit Rate)."
  ENTRY = "The time resolution is better in High Bit Rate."
  ENTRY = "Note that the data themselves are correct."
  ENTRY = "Version 04 : All the headers have been updated (laboratory name "
  ENTRY = "and email). Introduction of a new header file (Dataset). "
  ENTRY = "The PSD negative values in the version 03 have "
  ENTRY = "been replaced by the fillvalue (-1.00E+31)."
  ENTRY = "Version 03:"
  ENTRY = "The data were time tagged using TED version 2.4.3"
  ENTRY = "(TED Library 4.4.3 User Patch 1), provided by the Sheffield DWP Group."
  ENTRY = "Phase rotation corrected + exhaustive data. Older versions "
  ENTRY = "are obsolete and should not be used ! The negative values must not be"
  ENTRY = "taken into account by the users."
  ENTRY = "Version 02 : Obsolete. This version may be used if Version 03 is not "
  ENTRY = "available, as long as only total B and total E power are used !"
  ENTRY = "Version 01 : Obsolete. Should not be used !"
END META = DATASET CAVEATS
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                                   Variables      !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
START VARIABLE = Time C1 CP STA PSD
  PARAMETER TYPE = "Support Data"
  CATDESC       = "Interval Start time tag"
  UNITS         = "s"
  SI CONVERSION = "1.0>s"
  SIZES        = 1
  VALUE TYPE   = ISO TIME
  SIGNIFICANT DIGITS = 24
  FILLVAL     = 9999-12-31T23:59:59.999Z
  FIELDNAM    = "UT Time"
  LABLAXIS   = "UT"
  DELTA MINUS = 0.
  DELTA PLUS  = Duration C1 CP STA PSD
END VARIABLE = Time C1 CP STA PSD
!
START VARIABLE = Duration C1 CP STA PSD
  CATDESC       = "Interval duration"
  FIELDNAM     = "Sampling interval length"
  DEPEND_0     = Time_C1_CP_STA_PSD
  
```




3.6 Level 2 data – SA- Spectral Matrices Files (SM)

3.6.1 Format: CEF

3.6.2 Standard: cf 2.2.

3.6.3 Production Procedure: cf 2.3.2.

3.6.4 Quality Control Procedure: cf 2.4.2.

3.6.5 Delivery Procedure

Secured ftp from LPP (lantana.lpp.polytechnique.fr) to ESTEC (caa.estec.esa.int).

3.6.6 Product Specification

One CEF file per day and per satellite is produced.

This CEF file contains the Spectral Matrix values for the magnetic electric cross-products.

$$\begin{pmatrix} B_x^2 & B_x \cdot B_y^* & B_x \cdot B_z^* & B_x \cdot E_x^* & B_x \cdot E_y^* \\ B_y \cdot B_x^* & B_y^2 & B_y \cdot B_z^* & B_y \cdot E_x^* & B_y \cdot E_y^* \\ B_z \cdot B_x^* & B_z \cdot B_y^* & B_z^2 & B_z \cdot E_x^* & B_z \cdot E_y^* \\ E_x \cdot B_x^* & E_x \cdot B_y^* & E_x \cdot B_z^* & E_x^2 & E_x \cdot E_y^* \\ E_y \cdot B_x^* & E_y \cdot B_y^* & E_y \cdot B_z^* & E_y \cdot E_x^* & E_y^2 \end{pmatrix}$$

Data are separated into three variables, one for the magnetic components BB, one for the electric components EE, and one for the BE cross-products:

For sake of homogeneity, all components are given in $\text{mV}^2\text{m}^{-2}\text{Hz}^{-1}$ units.

Each variable is sampled for 27 ranges of frequencies described in the Dimension_F_C1_CP_STA_PSD variable which summarizes the 27 bin centres (given in Hz). This variable is linked to the Dimension_F_bin_half_width_C1_CP_STA_PSD variable which gives the half width of each bin.

Data are given in SR2 coordinate system.

3.6.7 Dataset metadata description

The version 07 CEF file includes a detached dataset header called: **C1/C2/C3/C4_CH_STA_SM.ceh**.

The introduction of dataset header gives the possibility to upload caveat files in the future and can be easily updated.

In this header, only the static parameters (global metadata, support data and data themselves description) are included.

First, the following **global metadata** keywords:

- DATASET_ID = "C1/C2/C3/C4_CP_STA_SM"
- DATA_TYPE = "CP"
- DATASET_TITLE = "Spectral Matrix (8 Hz - 4 kHz)"
- CONTACT_COORDINATES =
"Rodrigue Piberne>Archive Manager>rodrigue.piberne@lpp.polytechnique.fr
Olga Alexandrova>Co-I >olga.alexandrova@obspm.fr
Ondrej Santolik>Co-I>ondrej.santolik@mff.cuni.cz"
- DATASET_DESCRIPTION = "Cross spectral matrices formed from 3 components of the magnetic field and 2 components of the electric field determined with 4s time resolution at 27 logarithmically distributed frequencies between 8 Hz and 4 kHz."
- PROCESSING_LEVEL = "Calibrated"
- TIME_RESOLUTION = 4.0
- MIN_TIME_RESOLUTION = 4.0
- MAX_TIME_RESOLUTION = 1.0
- DATASET_CAVEATS = "*C1_CQ_STA_SA_PSDNEG_CAVEATS *C1_CQ_STA_NOTSRP_CAVEATS. Version 07 : New calibration tables plus addition of the interval duration and status. Removal of onboard calibration data. Warning to the users of versions lower than 07: Delta_plus of Time_C1_CP_STA_SM variables is set to a fixed value instead of a value varying with the mode. This chosen fixed value is the minimum time resolution (4s) which is correct in most of the cases (Normal Bit Rate) Note that the data themselves are correct. Version 04 : All the headers have been updated (laboratory name and email). Introduction of a new header file (Dataset). Units and Si Conversion of the variables BB and BE have been corrected. Version 03 : Phase rotation corrected + exhaustive data. The data were time tagged using TED version 2.4.3 (TED Library 4.4.3 User Patch 1), provided by the Sheffield DWP Group. Older versions are obsolete and should not be used ! Version 02 : Obsolete. Should not be used ! Version 01 : Obsolete. Should not be used !"

Then, the following **Support Data**:

&Time_tags__C1/C2/C3/C4_CP_STA_SM which the ISO time of data acquisition (Universal Time):

- PARAMETER_TYPE = "Support_Data"

- CATDESC = "Interval time tag"
- UNITS = "s"
- SI_CONVERSION = "1.0>s"
- SIZES = 1
- VALUE_TYPE = ISO_TIME
- SIGNIFICANT_DIGITS = 24
- FILLVAL = 9999-12-31T23:59:59.999Z
- FIELDNAM = "UT Time"
- LABLAXIS = "UT"
- DELTA_MINUS = 0.0
- DELTA_PLUS = Duration__C1_CP_STA_SM

&Duration defining the time interval between two measurements:

- CATDESC = "Interval duration"
- FIELDNAM = "Sampling interval length"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_SM
- FILLVAL = 9.999
- LABLAXIS = "s"
- PARAMETER_TYPE = "Support_Data"
- SI_CONVERSION = "1.0>s"
- SIGNIFICANT_DIGITS = 4
- UNITS = "s"
- VALUE_TYPE = FLOAT
- SIZES = 1

&Status defining the nine characters STAFF-SA status:

- CATDESC = "STAFF-SA Status"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_SM
- FIELDNAM = "STAFF-SA Status"
- FILLVAL = ZZZZZZZZ
- LABEL_1 = "Status"
- LABLAXIS = "Status"
- PARAMETER_CAVEATS = "First nine characters of STAFF Status. See UG, Appendix C. We cannot certify the 9th character (EFW Sweep)"
- PARAMETER_TYPE = "Support_Data"
- QUALITY = 1
- SIGNIFICANT_DIGITS = 9
- SIZES = 1
- UNITS = "unitless"
- VALUE_TYPE = CHAR

&Frequency represents the 27 frequency bin centres expressed in Hz. Each bin is sized by Frequency_BHW which expresses the half width of the bin (=DELTA_MINUS and DELTA_MINUS):

- PARAMETER_TYPE = "Support_Data"
- CATDESC = "Interval centred frequency tag"
- UNITS = "Hz"

- CATDESC = "Cross-spectral matrix of the magnetic field at 27 frequencies from 8Hz to 4 kHz."
- UNITS = "mV² m⁻² Hz⁻¹"
- SI_CONVERSION = "1.1E-17>T² Hz⁻¹"
- TENSOR_ORDER = 2
- TENSOR_FRAME =
- FRAME = "
- COORDINATE_SYSTEM =
- SIZES = 27,2,3,3 ! 27 frequency bins x 2 (Re.+Im.) parts (3x3)matrix
- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 3
- FILLVAL = -1.00000E+31
- FIELDNAM = "Spectral Matrix,BB components "
- LABLAXIS = "Spectral Matrix, BB components"
- REPRESENTATION_3 = "x","y","z"
- REPRESENTATION_4 = "x","y","z"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_SM
- DEPEND_1 = Frequency__C1/C2/C3/C4_CP_STA_SM
- LABEL_2 = "Re","Im"
- LABEL_3 = "Bx","By","Bz"
- LABEL_4 = "Bx","By","Bz"
- QUALITY = 0

&EE_xy_xy_sr2 variable stores the electric components of the spectral matrix is a complex tensor of order 2 :

- PARAMETER_TYPE = "Data"
- ENTITY = "Electric_Field"
- PROPERTY = "Vector"
- FLUCTUATIONS = "Wavelet_Cross-power-spectrum"
- CATDESC = "Cross-spectral matrix of the electric field at 27 frequencies from 8 Hz to 4 kHz"
- UNITS = "mV²m⁻²Hz⁻¹"
- SI_CONVERSION = "1.0E-6>V²m⁻²Hz⁻¹"
- TENSOR_ORDER = 2
- SR2SR2SR2SIZES = 27,2,2,2 ! 27 frequency bins x 2 (Re.+Im.) parts x (2x2)matrix
- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 3
- FILLVAL = -1.00000E+31
- FIELDNAM = "Spectral Matrix, EE components"
- LABLAXIS = "Spectral Matrix, EE components"
- REPRESENTATION_3 = "x","y"
- REPRESENTATION_4 = "x","y"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_SM
- DEPEND_1 = Frequency__C1/C2/C3/C4_CP_STA_SM
- LABEL_2 = "Re","Im"
- LABEL_3 = "Ex","Ey"
- LABEL_4 = "Ex","Ey"

- QUALITY = 0
- **BE_xyz_xy_sr2** variable stores the BE cross-product components of the spectral matrix is a complex tensor of order 2 :
 - PARAMETER_TYPE = "Data"
 - ENTITY = "Compound"
 - PROPERTY = "Vector"
 - FLUCTUATIONS = "Wavelet_Cross-spectrum"
 - CATDESC = "Electromagnetic cross-spectral ExB products at 27 frequencies from 8 Hz to 4 KHz"
 - UNITS = "mV² m⁻² Hz⁻¹"
 - SI_CONVERSION = "3.3E-15>T V m⁻¹ Hz⁻¹"
 - TENSOR_ORDER = 2
 - TENSOR_FRAME = "SR2"
 - FRAME = "SR2 >xyz"
 - COORDINATE_SYSTEM = "SR2"
 - SIZES = 27,2,3,2 ! 27 frequency bins x 2 (Re.+Im.) parts (3x2)matrix
 - VALUE_TYPE = FLOAT
 - SIGNIFICANT_DIGITS = 3
 - FILLVAL = -1.00000E+31
 - FIELDNAM = "Spectral Matrix, BE components"
 - LABLAXIS = "Spectral Matrix, BE components"
 - REPRESENTATION_3 = "x","y","z"
 - REPRESENTATION_4 = "x","y"
 - DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_SM
 - DEPEND_1 = Frequency__C1/C2/C3/C4_CP_STA_SM
 - LABEL_2 = "Re","Im"
 - LABEL_3 = "Bx","By","Bz"
 - LABEL_4 = "Ex","Ey"
 - QUALITY = 0

3.6.8 File Metadata Specification

The version 07 CEF file includes a detached dataset header called: **C1/C2/C3/C4_CH_STA_SM_ .ceh** described above 7.

For the version 04, the CEF header contains now only the static parameters (file and global metadata):

- The following **file metadata** keywords:

- FILE_NAME = C1/C2/C3/C4_CP_STA_SM__20070101_V04.cef
- FILE_FORMAT_VERSION = "CEF-2.0"
- END_OF_RECORD_MARKER = "\$"

- And the following **global metadata** keywords:

- FILE_TYPE = "cef"
- DATASET_VERSION = "04"

- LOGICAL_FILE_ID = ex. "C1/C2/C3/C4_CP_STA_SM__20070101_V04"
- VERSION_NUMBER = "04"
- METADATA_TYPE = "CAA"
- METADATA_VERSION = "2.0"
- FILE_TIME_SPAN = ex. 2007-01-01T00:00:00.000Z/2007-01-01T23:59:59.999Z
- GENERATION_DATE = ex. 2009-08-11T16:27:37.000Z
- FILE_CAVEATS = "Release V04 of STAFF-SA CAA Data. Ted version 2.4.3 with lib 4.4.3 User patch 1. STAFF-SA Processing software with C1_CT_STASA_20010110_V003.cal. Prassadco software: Module Read_N2SA (2002Dec16). Caa software version 2.0 of July 2009"

3.6.9 Dataset header example

Example: C1_CH_STA_SM.ceh

```
!CEH VALIDATION 12 Jan 2015 by LPP, header V08, (PC, NCW, RP, RK)
!
START META = DATASET ID
  ENTRY = "C1 CP STA SM"
END META = DATASET ID
!
START META = DATA TYPE
  ENTRY = "CP"
END META = DATA TYPE
!
START META = DATASET TITLE
  ENTRY = "Spectral Matrix (8 Hz - 4 kHz)"
END META = DATASET TITLE
!
START META = CONTACT COORDINATES
  ENTRY = "Rodrigue Piberne>Archive Manager>rodrigue.piberne@lpp.polytechnique.fr"
  ENTRY = "Olga Alexandrova>Co-I>olga.alexandrova@obspm.fr"
  ENTRY = "Ondrej Santolik>Co-I>ondrej.santolik@mff.cuni.cz"
END META = CONTACT COORDINATES
!
START META = DATASET DESCRIPTION
  ENTRY = "Cross spectral matrices formed from"
  ENTRY = "3 components of the magnetic field"
  ENTRY = "and 2 components of the electric field determined"
  ENTRY = "with either 1or 4s time resolution at 27 logarithmically"
  ENTRY = "distributed frequencies between 8 Hz and 4 kHz"
END META = DATASET DESCRIPTION
!
START META = TIME RESOLUTION
  ENTRY = 4.0
END META = TIME RESOLUTION
!
START META = MIN TIME RESOLUTION
  ENTRY = 4.0
END META = MIN TIME RESOLUTION
!
START META = MAX TIME RESOLUTION
  ENTRY = 1.0
END META = MAX TIME RESOLUTION
!
START META = PROCESSING LEVEL
  ENTRY = "Calibrated"
END META = PROCESSING LEVEL
!
START META = DATASET CAVEATS
  ENTRY = "*C1 CQ STA SA PSDNEG CAVEATS"
  ENTRY = "*C1 CQ STA NOTSRP CAVEATS"
  ENTRY = "Version 07 : New calibration tables plus addition of the interval "
  ENTRY = "duration and status. Removal of onboard calibration data."
  ENTRY = "Warning to the users of versions lower than 07:"
  ENTRY = "Delta plus of Time C1 CP STA SM variables is set to a fixed value"
  ENTRY = "instead of a value varying with the mode."
  ENTRY = "This chosen fixed value is the minimum time resolution (4s)"
  ENTRY = "which is correct in most of the cases (Normal Bit Rate)"
```

```

ENTRY = "Note that the data themselves are correct."
ENTRY = "Version 04 : All the headers have been updated (laboratory name "
ENTRY = "and email). Introduction of a new header file (Dataset). "
ENTRY = "Units and Si Conversion of the variables BB and BE have been corrected."
ENTRY = "Version 03 : Phase rotation corrected + exhaustive data. "
ENTRY = "The data were time tagged using TED version 2.4.3"
ENTRY = "(TED Library 4.4.3 User Patch 1), provided by the Sheffield DWP Group."
ENTRY = "Older versions are obsolete and should not be used ! "
ENTRY = "Version 02 : Obsolete. Should not be used !"
ENTRY = "Version 01 : Obsolete. Should not be used !"
END META = DATASET CAVEATS
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                 Variables !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
START VARIABLE = Time C1 CP STA SM
PARAMETER TYPE = "Support Data"
CATDESC = "Interval Start time tag"
UNITS = "s"
SI CONVERSION = "1.0>s"
SIZES = 1
VALUE TYPE = ISO TIME
SIGNIFICANT DIGITS = 24
FILLVAL = 9999-12-31T23:59:59.999Z
FIELDNAM = "UT Time"
LABLAXIS = "UT"
DELTA MINUS = 0.0
DELTA PLUS = Duration C1 CP STA SM
END VARIABLE = Time C1 CP STA SM
!
START VARIABLE = Duration C1 CP STA SM
CATDESC = "Interval duration"
FIELDNAM = "Interval duration"
DEPEND 0 = Time C1 CP STA SM
FILLVAL = 9
LABLAXIS = "s"
PARAMETER TYPE = "Support Data"
SI CONVERSION = "1.0>s"
SIGNIFICANT DIGITS = 1
UNITS = "s"
VALUE TYPE = INT
SIZES = 1
END VARIABLE = Duration C1 CP STA SM
!
START VARIABLE = Status C1 CP STA SM
CATDESC = "STAFF-SA Status"
DEPEND 0 = Time C1 CP STA SM
FIELDNAM = "STAFF-SA Status"
FILLVAL = ZZZZZZZZ
LABEL 1 = "Status"
LABLAXIS = "Status"
PARAMETER CAVEATS = "First nine characters of STAFF Status. See UG, Appendix C. \
We cannot certify the 9th character (EFW Sweep)"
PARAMETER TYPE = "Support Data"
QUALITY = 1
SIGNIFICANT DIGITS = 9
SIZES = 1
UNITS = "unitless"
VALUE TYPE = CHAR
END VARIABLE = Status C1 CP STA SM
!
START VARIABLE = Frequency C1 CP STA SM
PARAMETER TYPE = "Support Data"
CATDESC = "Interval centred frequency tag"
UNITS = "Hz"
SI CONVERSION = "1.0>Hz"
SIZES = 27
VALUE TYPE = FLOAT
SIGNIFICANT DIGITS = 4
FILLVAL = -999.99
FIELDNAM = "Frequency bin centres"
LABLAXIS = "F"
LABEL 1 =
"F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F"
", "F", "F", "F"
DELTA PLUS = Frequency BHW C1 CP STA SM
DELTA MINUS = Frequency BHW C1 CP STA SM
SCALETYP = Log
DATA = 8.7692,11.0485,13.9203,17.5385,22.0971,27.8406,35.0769, \
44.1942,55.6812,70.1539,88.3883,111.3623,140.3078, \
176.7767,222.7247,280.6155,353.5534,445.4493,561.2310, \
707.1068,890.8987,1122.4620,1414.2135,1781.7975, \
2244.9243,2828.4270,3563.5945

```

```

END VARIABLE = Frequency C1 CP STA SM
!
START VARIABLE = Frequency BHW C1 CP STA SM
  PARAMETER TYPE = "Support Data"
  CATDESC = "Frequency bin half widths"
  UNITS = "Hz"
  SI CONVERSION = "1.0>Hz"
  SIZES = 27
  VALUE TYPE = FLOAT
  SIGNIFICANT DIGITS = 3
  FILLVAL = -999.99
  FIELDNAM = "Frequency bin half widths"
  LABLAXIS = "F bhw"
  LABEL 1 =
  "F bhw","F bhw","F bhw","F bhw","F bhw","F bhw","F bhw","F bhw","F bhw","F bhw","F bhw","F bhw"
  "F bhw","F bhw","F bhw","F bhw","F bhw","F bhw","F bhw","F bhw","F bhw","F bhw","F bhw","F bhw"
  "F bhw","F bhw","F bhw","F bhw"
  SCALETYP = Log
  DATA = 1.0085,1.2706,1.6008,2.0169,2.5412,3.2017,4.0338, \
  5.0823,6.4033,8.0677,10.1647,12.8067,16.1354,20.3293, \
  25.6133,32.2708,40.6586,51.2267,64.5416,81.3173, \
  102.4534,129.0831,162.6346,204.9067,258.1663,325.2691, \
  409.8134
END VARIABLE = Frequency BHW C1 CP STA SM
!
START VARIABLE = BB xyz xyz sr2 C1 CP STA SM
  PARAMETER TYPE = "Data"
  ENTITY = "Magnetic Field"
  PROPERTY = "Vector"
  FLUCTUATIONS = "Wavelet Cross-power-spectrum"
  CATDESC = "Cross-spectral matrix of the magnetic field at 27 frequencies from 8
  Hz to 4 kHz"
  UNITS = "mV^2 m^-2 Hz^-1"
  SI CONVERSION = "1.1E-17>T^2 Hz^-1"
  TENSOR ORDER = 2
  TENSOR FRAME = "SR2"
  FRAME = "SR2>xyz"
  COORDINATE SYSTEM = "SR2"
  SIZES = 27,2,3,3 ! 27 frequency bins x 2 (Re.+Im.) parts x (3x3)matrix
  VALUE TYPE = FLOAT
  SIGNIFICANT DIGITS = 3
  FILLVAL = -1.00000E+31
  FIELDNAM = "Spectral Matrix, BB components"
  LABLAXIS = "Spectral Matrix, BB components"
  REPRESENTATION 3 = "x","y","z"
  REPRESENTATION 4 = "x","y","z"
  DEPEND 0 = Time C1 CP STA SM
  DEPEND 1 = Frequency C1 CP STA SM
  LABEL 2 = "Re","Im"
  LABEL 3 = "Bx","By","Bz"
  LABEL 4 = "Bx","By","Bz"
  QUALITY = 3
END VARIABLE = BB xyz xyz sr2 C1 CP STA SM
!
START VARIABLE = EE xy xy sr2 C1 CP STA SM
  PARAMETER TYPE = "Data"
  ENTITY = "Electric Field"
  PROPERTY = "Vector"
  FLUCTUATIONS = "Wavelet Cross-power-spectrum"
  CATDESC = "Cross-spectral matrix of the electric field at 27 frequencies from 8
  Hz to 4 kHz"
  UNITS = "mV^2 m^-2 Hz^-1"
  SI CONVERSION = "1.0E-6>V^2 m^-2 Hz^-1"
  TENSOR ORDER = 2
  TENSOR FRAME = "SR2"
  FRAME = "SR2>xyz"
  COORDINATE SYSTEM = "SR2"
  SIZES = 27,2,2,2 ! 27 frequency bins x 2 (Re.+Im.) parts x (2x2)matrix
  VALUE TYPE = FLOAT
  SIGNIFICANT DIGITS = 3
  FILLVAL = -1.00000E+31
  FIELDNAM = "Spectral Matrix, EE components"
  LABLAXIS = "Spectral Matrix, EE components"
  REPRESENTATION 3 = "x","y"
  REPRESENTATION 4 = "x","y"
  DEPEND 0 = Time C1 CP STA SM
  DEPEND 1 = Frequency C1 CP STA SM
  LABEL 2 = "Re","Im"
  LABEL 3 = "Ex","Ey"
  LABEL 4 = "Ex","Ey"
  QUALITY = 3
END VARIABLE = EE xy xy sr2 C1 CP STA SM
!
START VARIABLE = BE xyz xy sr2 C1 CP STA SM

```

```


PARAMETER TYPE      = "Data"
ENTITY              = "Compound"
PROPERTY            = "Vector"
FLUCTUATIONS        = "Wavelet Cross-spectrum"
CATDESC             = "Electromagnetic cross-spectral ExB products at 27 frequencies from 8
Hz to 4 kHz"
UNITS               = "mV^2 m^-2 Hz^-1"
SI CONVERSION        = "3.3E-15>T V m^-1 Hz^-1"
Tensor ORDER        = 2
Tensor FRAME        = "SR2"
FRAME               = "SR2>xyz"
COORDINATE SYSTEM   = "SR2"
SIZES               = 27,2,3,2      ! 27 frequency bins x 2 (Re.+Im.) parts x (3x2)matrix
VALUE TYPE          = FLOAT
SIGNIFICANT DIGITS  = 3
FILLVAL             = -1.00000E+31
FIELDNAM            = "Spectral Matrix, BE components"
LABLAXIS            = "Spectral Matrix, BE components"
REPRESENTATION 3    = "x","y","z"
REPRESENTATION 4    = "x","y"
DEPEND 0            = Time C1 CP STA SM
DEPEND 1            = Frequency C1 CP STA SM
LABEL 2             = "Re","Im"
LABEL 3             = "Bx","By","Bz"
LABEL 4             = "Ex","Ey"
QUALITY             = 3
END_VARIABLE = BE_xyz_xy_sr2_C1_CP_STA_SM
  
```

3.6.10 Dataset file example:

Version 04: C1_CP_STA_SM__20070101_V04.cef

```

!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
!                                                                                               File Metadata      !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
FILE NAME = "C1 CP STA SM 20070101 V07.cef"
FILE FORMAT VERSION = "CEF-2.0"
END OF RECORD MARKER = "$"
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
!                                                                                               Global Metadata      !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
INCLUDE= CL CH MISSION.cef           ! Mission level metadata.
!
INCLUDE= C1 CH OBS.cef              ! Observatory level metadata.
!
INCLUDE= CL CH STA.cef              ! Experiment level metadata.
!
INCLUDE= C1 CH STA SA.cef           ! Instrument level metadata.
!
INCLUDE= C1 CH STA SM.cef           ! Dataset level metadata.
!
START META = FILE TYPE
ENTRY = "cef"
END META = FILE TYPE
!
START META = LOGICAL FILE ID
ENTRY = "C1 CP STA SM 20070101 V07"
END META = LOGICAL FILE ID
!
START META = DATASET VERSION
ENTRY = "07"
END META = DATASET VERSION
!
START META = VERSION NUMBER
ENTRY = "07"
END META = VERSION NUMBER
!
START META = METADATA TYPE
ENTRY = "CAA"
END META = METADATA TYPE
!
START META = METADATA VERSION
ENTRY = "2.0"
END META = METADATA_VERSION
  
```

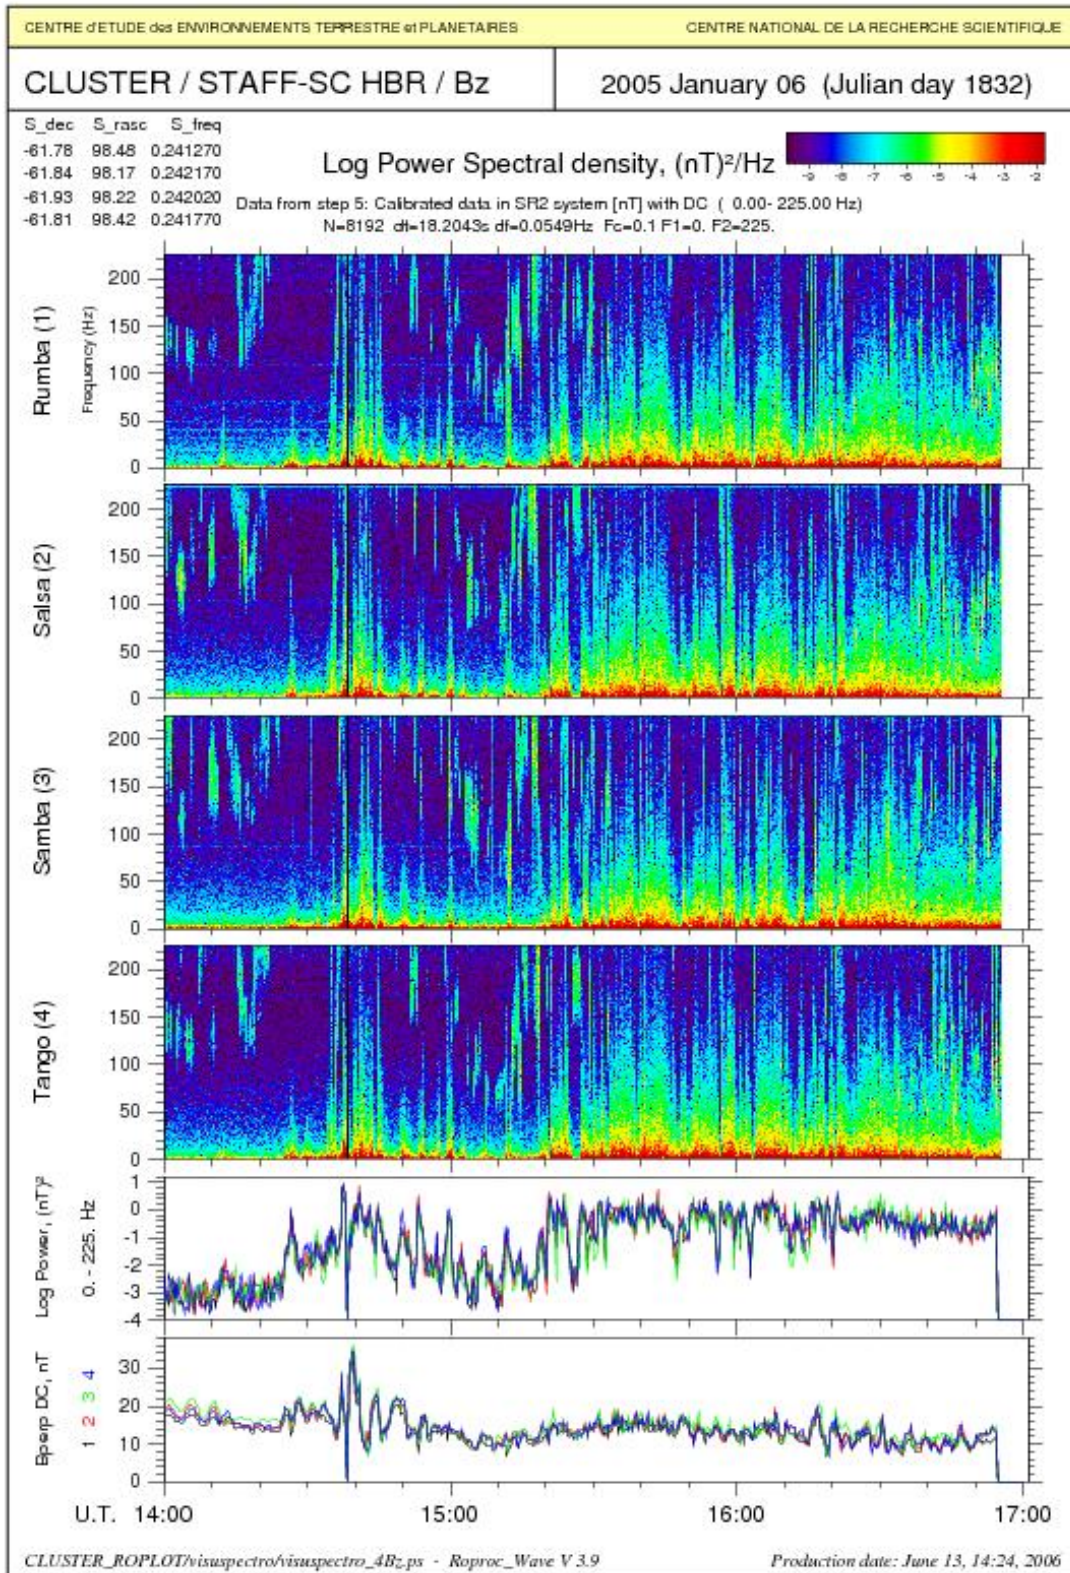3.7.6.2 STAFF house keeping plots

<DATASET_TITLE>
 STAFF-HK-plot

</DATASET_TITLE>

<DATASET_DESCRIPTION>

These plots show a summary of housekeeping data extracted from WEC HK telemetry. There is one plot per S/C, of 3 hours duration each. HK time resolution is 5.15 seconds.

The plotted parameters allow verifying the mode of operation and the health of STAFF experiment, in the context of WEC and satellite mode of operation.

It permits in particular to understand data gaps.

The 10 plots, from top to bottom describe:


1-The S/C telemetry mode

2- STAFF relevant DWP status (as Application or TM overflow)

3-4-5 STAFF SC (3- mode; 4- maximum amplitude of the waveform; 5- compression mode)

6-7-8 STAFF SA (6 and 7- AGC level; 8-mode)

9 and 10 various WEC and STAFF status

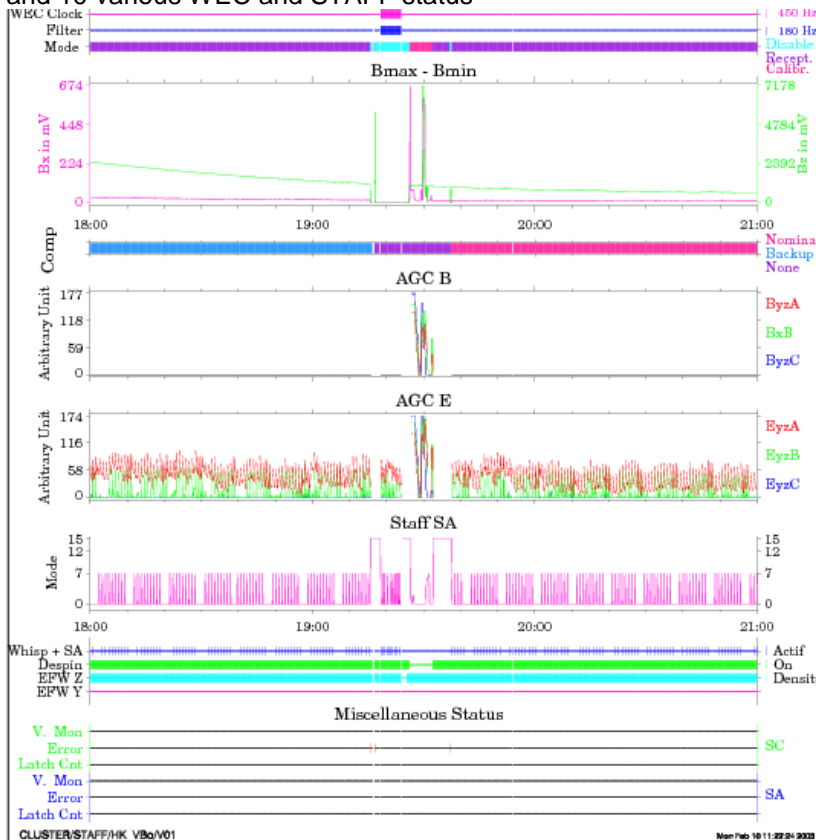

Example of HK plot. There is a calibration mode in operation in the middle of the 3 hours time.

3.7.7 File Metadata Specification

N/A

3.8 Level 3 data - SA – Polarization and Propagation Parameters (PPP)

3.8.1 Format: CEF

3.8.2 Standard: cf 2.2.

3.8.3 Production Procedure: cf 2.3.2.

3.8.4 Quality Control Procedure: cf 2.4.2.

3.8.5 Delivery Procedure

Secured ftp from LPP (lantana.lpp.polytechnique.fr) to ESTEC (caa.estec.esa.int).

3.8.6 Product Specification

One CEF file per day and per satellite is produced.

This CEF file contains the Polarization and Propagation Parameters for the magnetic and the electric field.

Data are separated into seven variables:

The parameters calculated from the three magnetic components are:

- THSVD_mfa__C1_STA_PPP is the float variable defined for the polar angle value of the wave vector (where C1 stands for satellite 1 in this example), they are given in degree units.
- PHSVD_mfa__C1_STA_PPP is the float variable defined for the azimuthal angle value of the wave vector (where C1 stands for satellite 1 in this example), they are given in degree units.
- ELLSVD__C1_CP_STA_PPP is the float variable defined for the ellipticity of the polarization (unitless)
- POLSVD__C1_CP_STA_PPP is the float variable defined for the degree of polarization in the polarization plane.
- BSUM__C1_CP_STA_PPP is the float variable defined for the sum of the three auto-power spectra of the three magnetic antennae given in $\text{nT}^2\text{Hz}^{-1}$ units.
- PVSIGN__C1_CP_STA_PPP is the float variables defined for the direction of the Poynting vector component parallel to the magnetic field. Positive (negative) values correspond to a parallel (anti-parallel) Z-component of the Poynting vector.

- ESUM__C1_CP_STA_PPP is the float variable defined for the sum of the two auto-power spectra of the two electric antennae given in $\text{mV}^2\text{m}^{-2}\text{Hz}^{-1}$ units. Each variable is sampled for 27 ranges of frequencies described in the Dimension_F__C1_CP_STA_PPP variable which summarizes the 27 bin centres (given in Hz). This variable is linked to the Dimension_F_bin_half_width__C1_CP_STA_PPP variable which gives the half width of each bin. Data are given in MFA coordinate system. Note that coordinate transformation is not allowed since the information that is mandatory for such an operation is unknown.

3.8.7 Dataset metadata description:

The detached dataset header is called: **C1/C2/C3/C4_CH_STA_PPP.ceh**.

In this header, only the static parameters (global metadata, support data and data themselves description) are included.

- First, the following **global metadata** keywords:

- DATASET_ID = C1/C2/C3/C4_CP_STA_PPP
- DATA_TYPE = "CP"
- DATASET_TITLE = "Polarization and Propagation Parameter"
- CONTACT_COORDINATES =
"Rodrigue Piberne>Archive Manager>rodrigue.piberne@lpp.polytechnique.fr
Olga Alexandrova>Co-I >olga.alexandrova@obspm.fr
Ondrej Santolik>Co-I>ondrej.santolik@mff.cuni.cz"
- DATASET_DESCRIPTION = "Polarization and propagation parameters derived from singular value decomposition (SVD) method of the cross-spectral matrix (sm) using the PRASSADCO program with 4s (or 1s) time resolution at 27 (or 18) logarithmically distributed frequencies between either 8 (or 64) Hz to 4 kHz. The SVD method is described in Santolik et al (2003). The parameters calculated from the three magnetic components are THSVD, PHSVD, ELLSVD, POLSVD and BSUM. BSUM is the sum of the three magnetic auto-power spectra. When BSUM is inferior to $1.0\text{E}-09 \text{ nT}^2/\text{Hz}$, the calculation of the other magnetic dependant parameters is meaningless. The theta and phi variables are respectively the wave vector polar and azimuthal angles in MFA coordinate system. PVSIGN is the direction of the Poynting vector component parallel to the magnetic field. It is given only when E component is valid. Positive (negative) values correspond to a parallel (anti-parallel) Z-component of the Poynting vector. ESUM is the the sum of auto-power spectra of the two electric antennae. The calculation of PVSIGN is meaningless when BSUM is inferior to $1.0\text{E}-09 \text{ nT}^2/\text{Hz}$, and ESUM to $3.0\text{E}-09 \text{ mV}^2\text{m}^2/\text{Hz}$. The change of coordinate system has been done using FGM 5VPS data. "
- PROCESSING_LEVEL = "Derived"
- TIME_RESOLUTION = 4.0
- MIN_TIME_RESOLUTION = 4.0
- MAX_TIME_RESOLUTION = 1.0
- DATASET_CAVEATS =

- DATA = 1.0085, 1.2706, 1.6008, 2.0169, 2.5412, 3.2017, 4.0338, 5.0823, 6.4033, 8.0677, 10.1647, 12.8067, 16.1354, 20.3293, 25.6133, 32.2708, 40.6586, 51.2267, 64.5416, 81.3173, 102.4534, 129.0831, 162.6346, 204.9067, 258.1663, 325.2691, 409.8134

Data themselves:

&THSVD_mfa__C1/C2/C3/C4_CP_STA_PPP variable stores the polar angle of the direction of propagation in MFA coordinate system (SVD).

- PARAMETER_TYPE = "Data"
- ENTITY = "Compound"
- PROPERTY = "Direction"
- CATDESC = "Polar angle of the direction of propagation in MFA coordinate system (SVD)."
- UNITS = "deg"
- SI_CONVERSION = "1>degree"
- SIZES = 27 ! 27 frequency bins
- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 1
- FILLVAL = -999.
- FIELDNAM = "Polar angle (SVD) in MFA coordinate system."
- LABLAXIS = "THSVD"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_PPP
- DEPEND_1 = Frequency__C1/C2/C3/C4_CP_STA_PPP
- QUALITY = 3

& PHSVD_mfa__C1/C2/C3/C4_CP_STA_PPP variable stores the azimuthal angle of the direction of propagation in MFA coordinate system (SVD).

- PARAMETER_TYPE = "Data"
- ENTITY = "Compound"
- PROPERTY = "Direction"
- CATDESC = "Azimuthal angle of the direction of propagation in MFA coordinate system (SVD)."
- UNITS = "deg"
- SI_CONVERSION = "1>degree"
- SIZES = 27 ! 27 frequency bins
- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 1
- FILLVAL = -999.
- FIELDNAM = "Azimuthal angle (SVD) in MFA coordinate system."
- LABLAXIS = "PHSVD"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_PPP
- DEPEND_1 = Frequency__C1/C2/C3/C4_CP_STA_PPP
- QUALITY = 3

& ELLSVD__C1/C2/C3/C4_CP_STA_PPP variable stores the ellipticity of the polarization (SVD).

- PARAMETER_TYPE = "Data"

- ENTITY = "Compound"
- PROPERTY = "Magnitude"
- CATDESC = "Ellipticity of the polarization (SVD)."
- UNITS = "Unitless"
- SI_CONVERSION = "1>unitless"
- SIZES = 27 ! 27 frequency bins
- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 2
- FILLVAL = -9.9
- FIELDNAM = "Ellipticity of the polarization (SVD)."
- LABLAXIS = "ELLSVD"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_PPP
- DEPEND_1 = Frequency__C1/C2/C3/C4_CP_STA_PPP
- QUALITY = 3

& POLSVD__C1/C2/C3/C4_CP_STA_PPP variable stores the degree of polarization in the polarizationplane (SVD).

- PARAMETER_TYPE = "Data"
- ENTITY = "Compound"
- PROPERTY = "Magnitude"
- CATDESC = "Degree of polarization in the polarization plane (SVD)."
- UNITS = "Unitless"
- SI_CONVERSION = "1>unitless"
- SIZES = 27 ! 27 frequency bins
- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 2
- FILLVAL = -9.9
- FIELDNAM = "Degree of polarization in the polarization plane (SVD)."
- LABLAXIS = "POLSVSD"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_PPP
- DEPEND_1 = Frequency__C1/C2/C3/C4_CP_STA_PPP
- QUALITY = 3

& BSUM__C1/C2/C3/C4_CP_STA_PPP variable stores the sum of the three magnetic auto-power spectra.

- PARAMETER_TYPE = "Data"
- ENTITY = "Compound"
- PROPERTY = "Magnitude"
- CATDESC = "Sum of the three magnetic auto-power spectra."
- UNITS = "nT² Hz⁻¹"
- SI_CONVERSION = "1.0E-18>T² Hz⁻¹"
- SIZES = 27 ! 27 frequency bins
- VALUE_TYPE = FLOAT
- SIGNIFICANT_DIGITS = 2
- FILLVAL = -1.00E-31
- FIELDNAM = "Sum of the three magnetic auto-power spectra."
- LABLAXIS = "BSUM"
- DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_PPP

- `DEPEND_1 = Frequency__C1/C2/C3/C4_CP_STA_PPP`
- `QUALITY = 3`

& PVSIGN__C1/C2/C3/C4_CP_STA_PPP variable stores the parallel component of the Poynting vector normalized by its standard deviation.

- `PARAMETER_TYPE = "Data"`
- `ENTITY = "Compound"`
- `PROPERTY = "Component"`
- `CATDESC = "Parallel component of the Poynting vector normalized by its standard deviation."`
- `UNITS = "Unitless"`
- `SI_CONVERSION = "1>Unitless"`
- `SIZES = 27 ! 27 frequency bins`
- `VALUE_TYPE = FLOAT`
- `SIGNIFICANT_DIGITS = 2`
- `FILLVAL = -1.00E-31`
- `FIELDNAM = "Normalized Z-component of the Poynting vector."`
- `LABLAXIS = "PVSIGN"`
- `DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_PPP`
- `DEPEND_1 = Frequency__C1/C2/C3/C4_CP_STA_PPP`
- `QUALITY = 3`

& ESUM__C1/C2/C3/C4_CP_STA_PPP variable stores the sum of the two electric auto-power spectra.

- `PARAMETER_TYPE = "Data"`
- `ENTITY = "Compound"`
- `PROPERTY = "Magnitude"`
- `CATDESC = "Sum of the two electric auto-power spectra."`
- `UNITS = "mV^2 m^-2 Hz^-1"`
- `SI_CONVERSION = "1.0E-6>V^2 m^-2 Hz^-1"`
- `SIZES = 27 ! 27 frequency bins`
- `VALUE_TYPE = FLOAT`
- `SIGNIFICANT_DIGITS = 2`
- `FILLVAL = -1.00E-31`
- `FIELDNAM = "Sum of the two electric auto-power spectra."`
- `LABLAXIS = "ESUM"`
- `DEPEND_0 = Time__C1/C2/C3/C4_CP_STA_PPP`
- `DEPEND_1 = Frequency__C1/C2/C3/C4_CP_STA_PPP`
- `QUALITY = 3`

3.8.8 File Metadata Specification

The version 4 CEF file includes a detached dataset header called: **C1/C2/C3/C4_CH_STA_PPP.ceh** described above.

For the version 01, the CEF contains now only the static parameters (file and global metadata).

- The following file **metadata** keywords:

- FILE_NAME = C1/C2/C3/C4_CP_STA_PPP__20010201_V01.cef
- FILE_FORMAT_VERSION = "CEF-2.0"
- END_OF_RECORD_MARKER = "\$"

- And the following **global metadata** keywords:

- FILE_TYPE = "cef"
- LOGICAL_FILE_ID = "C1/C2/C3/C4_CP_STA_PPP__20070101_V04"
- DATASET_VERSION = "01"
- VERSION_NUMBER = "01"
- METADATA_TYPE = "CAA"
- METADATA_VERSION = "2.0"
- FILE_TIME_SPAN = ex. 2001-02-01T00:00:00.000Z/2001-02-01T23:59:59.999Z
- GENERATION_DATE = ex. 2010-04-26T18:59:06.000Z
- FILE_CAVEATS = "Release V01 of STAFF-SA CAA Data. TED version 2.4.3 with lib 4.4.3 User Patch 1. STAFF-SA Processing software with C1_CT_STASA_20010110_V003.cal.Prassadco software: Module read_N2SA(2010Feb10) and module PRASSADCO(2010Feb01). Caa software version 2.0 of July 2009"

3.8.9 Dataset header example

Example: C1_CH_STA_PPP.ceh

```
!CEH VALIDATION 21 July 2015 by LPP, header V07, (PC, NCW, RK, RP)
!
START META = DATASET ID
ENTRY = "C1 CP STA PPP"
END META = DATASET ID
!
START META = DATA TYPE
ENTRY = "CP"
END META = DATA TYPE
!
START META = DATASET TITLE
ENTRY = "Polarization and Propagation Parameters"
END META = DATASET TITLE
!
START META = CONTACT COORDINATES
ENTRY = "Rodrigue Piberne>Archive Manager>rodrigue.piberne@lpp.polytechnique.fr"
ENTRY = "Ondrej Santolik>Co-I>ondrej.santolik@mff.cuni.cz"
ENTRY = "Olga Alexandrova>Co-I>olga.alexandrova@obsmp.fr"
END META = CONTACT COORDINATES
!
START META = DATASET DESCRIPTION
ENTRY = "Polarization and propagation parameters"
ENTRY = "derived from singular value decomposition (SVD) method"
ENTRY = "of the cross-spectral matrix (sm) using the PRASSADCO program"
ENTRY = "with 4s (or 1s) time resolution at 27 (or 18) logarithmically"
ENTRY = "distributed frequencies between either 8 (or 64) Hz to 4 kHz."
ENTRY = "The SVD method is described in Santolik et al (2003)."
```

```
ENTRY = "ESUM is the the sum of auto-power spectra of the two electric antennae."  
ENTRY = "The calculation of PVSIGN is meaningless when BSUM is inferior to"  
ENTRY = "1.0E-09 nT^2/Hz, and ESUM to 3.0E-09mv^2m^-2/Hz."  
ENTRY = "The change of coordinate system has been done using"  
ENTRY = "FGM 5VPS data."  
END META = DATASET DESCRIPTION  
!  
START META = TIME RESOLUTION  
ENTRY = 4.0  
END META = TIME RESOLUTION  
!  
START META = MIN TIME RESOLUTION  
ENTRY = 4.0  
END META = MIN TIME RESOLUTION  
!  
START META = MAX TIME RESOLUTION  
ENTRY = 1.0  
END META = MAX TIME RESOLUTION  
!  
START META = PROCESSING LEVEL  
ENTRY = "Derived"  
END META = PROCESSING LEVEL  
!  
START META = DATASET CAVEATS  
ENTRY = "*C1 CQ STA SA UNDEFINED MFA CAVEATS"  
ENTRY = "*C1 CQ STA SA PSDNEG CAVEATS"  
ENTRY = "*C1 CQ STA NOTSRP CAVEATS"  
ENTRY = "Version 07 : New calibration tables plus addition of the half-interval "  
ENTRY = "duration and status. Removal of onboard calibration data."  
ENTRY = "Now with FGM induced gaps. FGM file used described in the FILE CAVEATS "  
ENTRY = "metadata section. "  
ENTRY = "Warning to the users of versions lower than 07:"  
ENTRY = "Delta plus of Time C1 CP STA PPP variables was set to a fixed value"  
ENTRY = "instead of a value varying with the mode."  
ENTRY = "This chosen fixed value is the minimum time resolution (4s)"  
ENTRY = "which is correct in most of the cases (Normal Bit Rate)."  
ENTRY = "Note that the data themselves are correct."  
ENTRY = "The data were time tagged using TED version 2.4.3"  
ENTRY = "(TED Library 4.4.3 User Patch 1), provided by the Sheffield DWP Group."  
ENTRY = "Version 05: used the new calibration tables (feb 2013)."  
ENTRY = "Version 03: AUX files in CDF format used are 26 hours."  
ENTRY = "Same data than version02 but less missing values."  
ENTRY = "Version 02: Data format corrected."  
ENTRY = "Version 01: Obsolete. Should not be used !"  
END META = DATASET CAVEATS  
!  
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
!                                                                              Variables  !  
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
!  
START VARIABLE = Time  C1 CP STA PPP  
PARAMETER TYPE  = "Support Data"  
CATDESC         = "Interval time tag"  
UNITS           = "s"  
SI CONVERSION   = "1.0>s"  
SIZES          = 1  
VALUE TYPE     = ISO TIME  
SIGNIFICANT DIGITS = 24  
FILLVAL       = 9999-12-31T23:59:59.999Z  
FIELDNAM      = "UT Time"  
LABLAXIS      = "UT"  
DELTA MINUS   = Duration C1 CP STA PPP  
DELTA PLUS    = Duration C1 CP STA PPP  
END VARIABLE = Time  C1 CP STA PPP  
!  
START VARIABLE = Frequency C1 CP STA PPP  
PARAMETER TYPE  = "Support Data"  
CATDESC         = "Interval centred frequency tag"  
UNITS           = "Hz"  
SI CONVERSION   = "1.0>Hz"  
SIZES          = 27  
VALUE TYPE     = FLOAT  
SIGNIFICANT DIGITS = 4  
FILLVAL       = -999.99  
FIELDNAM      = "Frequency bin centres"  
LABLAXIS      = "F"  
LABEL 1  
"F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F","F"  
", "F", "F", "F"  
DELTA PLUS     = Frequency BHW C1 CP STA PPP  
DELTA MINUS    = Frequency BHW C1 CP STA PPP  
SCALETYP      = Log  
DATA          = 8.7692,11.0485,13.9203,17.5385,22.0971,27.8406,35.0769, \  
               44.1942,55.6812,70.1539,88.3883,111.3623,140.3078, \  

```



```

UNITS = "deg"
SI CONVERSION = "1>degree"
SIZES = 27 ! 27 frequency bins
VALUE TYPE = FLOAT
SIGNIFICANT DIGITS = 1
FILLVAL = -999.
FIELDNAM = "Azimuthal angle (SVD) in MFA coordinate system"
LABLAXIS = "PHSVD"
DEPEND 0 = Time C1 CP STA PPP
DEPEND 1 = Frequency C1 CP STA PPP
QUALITY = 3
END VARIABLE = PHSVD mfa C1 CP STA PPP
!
START VARIABLE = ELLSVD C1 CP STA PPP
PARAMETER TYPE = "Data"
ENTITY = "Compound"
PROPERTY = "Magnitude"
CATDESC = "Ellipticity of the polarization (SVD)."
```

UNITS = "Unitless"

SI CONVERSION = "1.0>unitless"

SIZES = 27 ! 27 frequency bins

VALUE TYPE = FLOAT

SIGNIFICANT DIGITS = 2

FILLVAL = -9.9

FIELDNAM = "Ellipticity of the polarization (SVD)"

LABLAXIS = "ELLSVD"

DEPEND 0 = Time C1 CP STA PPP

DEPEND 1 = Frequency C1 CP STA PPP

QUALITY = 3

END VARIABLE = ELLSVD C1 CP STA PPP

!

START VARIABLE = POLSVD C1 CP STA PPP

PARAMETER TYPE = "Data"

ENTITY = "Compound"

PROPERTY = "Magnitude"

CATDESC = "Degree of polarization in the polarization plane (SVD)."

UNITS = "Unitless"

SI CONVERSION = "1.0>unitless"

SIZES = 27 ! 27 frequency bins

VALUE TYPE = FLOAT

SIGNIFICANT DIGITS = 2

FILLVAL = -9.9

FIELDNAM = "Degree of polarization in the polarization plane (SVD)."

LABLAXIS = "POLSVSD"

DEPEND 0 = Time C1 CP STA PPP

DEPEND 1 = Frequency C1 CP STA PPP

QUALITY = 3

END VARIABLE = POLSVD C1 CP STA PPP

!

START VARIABLE = BSUM C1 CP STA PPP

PARAMETER TYPE = "Data"

ENTITY = "Compound"

PROPERTY = "Magnitude"

CATDESC = "Sum of the three magnetic auto-power spectra."

UNITS = "nT² Hz⁻¹"

SI CONVERSION = "1.0E-18>T² Hz⁻¹"

SIZES = 27 ! 27 frequency bins

VALUE TYPE = FLOAT

SIGNIFICANT DIGITS = 2

FILLVAL = -1.00E+31

FIELDNAM = "Sum of the three magnetic auto-power spectra."

LABLAXIS = "BSUM"

DEPEND 0 = Time C1 CP STA PPP

DEPEND 1 = Frequency C1 CP STA PPP

QUALITY = 3

END VARIABLE = BSUM C1 CP STA PPP

!

START VARIABLE = PVSIGN C1 CP STA PPP

PARAMETER TYPE = "Data"

ENTITY = "Compound"

PROPERTY = "Component"

CATDESC = "Parallel component of the Poynting vector normalized by its standard deviation."

UNITS = "Unitless"

SI CONVERSION = "1.0>unitless"

SIZES = 27 ! 27 frequency bins

VALUE TYPE = FLOAT

SIGNIFICANT DIGITS = 2

FILLVAL = -1.00E+31

FIELDNAM = "Normalized Z-component of the Poynting vector"

LABLAXIS = "PVSIGN"

DEPEND 0 = Time C1 CP STA PPP

DEPEND 1 = Frequency C1 CP STA PPP

QUALITY = 3

```
END VARIABLE = PVSIGN C1 CP STA PPP
!  
START VARIABLE = ESUM C1 CP STA PPP
PARAMETER TYPE = "Data"  
ENTITY = "Compound"  
PROPERTY = "Magnitude"  
CATDESC = "Sum of the two electric auto-power spectra."  
UNITS = "mV^2 m^-2 Hz^-1"  
SI CONVERSION = "1.0E-6>V^2 m^-2 Hz^-1"  
SIZES = 27 ! 27 frequency bins  
VALUE TYPE = FLOAT  
SIGNIFICANT DIGITS = 2  
FILLVAL = -1.00E+31  
FIELDNAM = "Sum of the two electric auto-power spectra."  
LABLAXIS = "ESUM"  
DEPEND 0 = Time C1 CP STA PPP  
DEPEND 1 = Frequency C1 CP STA PPP  
QUALITY = 3  
END VARIABLE = ESUM C1 CP STA PPP
!
```

3.8.10 Dataset file example

Version 01: C1_CP_STA_PPP__20010201_V01.cef

```
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
! File Metadata !  
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
!  
FILE NAME = "C1 CP STA PPP 20010201 V02.cef"  
FILE FORMAT VERSION = "CEF-2.0"  
END OF RECORD MARKER = "$"  
!  
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
! Global Metadata !  
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!  
!  
INCLUDE= CL CH MISSION.cef ! Mission level metadata.  
!  
INCLUDE= C1 CH OBS.cef ! Observatory level metadata.  
!  
INCLUDE= CL CH STA.cef ! Experiment level metadata.  
!  
INCLUDE= C1 CH STA SA.cef ! Instrument level metadata.  
!  
INCLUDE= C1 CH STA PPP.cef ! Dataset level metadata.  
!  
START META = DATASET VERSION  
ENTRY = "02"  
END META = DATASET VERSION  
!  
START META = LOGICAL FILE ID  
ENTRY = "C1 CP STA PPP 20010201 V02"  
END META = LOGICAL FILE ID  
!  
START META = FILE TYPE  
ENTRY = "cef"  
END META = FILE TYPE  
!  
START META = VERSION NUMBER  
ENTRY = "02"  
END META = VERSION NUMBER  
!  
START META = METADATA TYPE  
ENTRY = "CAA"  
END META = METADATA TYPE  
!  
START META = METADATA VERSION  
ENTRY = "2.0"  
END META = METADATA VERSION  
!  
START META = FILE TIME SPAN  
VALUE TYPE = ISO TIME RANGE  
ENTRY = 2001-02-01T00:00:00.000Z/2001-02-01T23:59:59.999Z  
END META = FILE TIME SPAN  
!  
START META = GENERATION_DATE
```

```
VALUE TYPE = ISO TIME
ENTRY = 2010-05-07T15:30:32.000Z
END META = GENERATION DATE
!
START META = FILE CAVEATS
ENTRY = "Release V02 of STAFF-SA CAA Data"
ENTRY = "TED version 2.4.3 with lib 4.4.3 User Patch 1"
ENTRY = "STAFF-SA Processing software with C1 CT STASA 20010110 V003.cal"
ENTRY = "Prassadco software:"
ENTRY = "Module read N2SA(2010Feb10) and module PRASSADCO(2010Feb01)"
ENTRY = "Caa software version 2.0 of July 2009"
END META = FILE CAVEATS
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                                               Data      !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
! Each block of data is organized this way:
!
! | "ISO-TIME",
! | Parameters depending on the magnetics fields.
! | THSVD,   repeated 27 times for the 27 freq.
! | PHSVD,   repeated 27 times for the 27 freq.
! | ELLSVD,  repeated 27 times for the 27 freq.
! | POLSVD,  repeated 27 times for the 27 freq.
! | BSUM,    repeated 27 times for the 27 freq.
! | Parameters depending on the magnetics and electric fields
! | PVSIGN,  repeated 27 times for the 27 freq.
! | ESUM,    repeated 27 times for the 27 freq.
! | ...$
!
!
!
! DATA UNTIL = EOF
!
2001-02-01T00:00:14.587Z,
-999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -
999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -
999.,
-999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -
999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -999., -
999.,
-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-
9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-
-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-9.9,-
-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-
1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-
1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-
-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-
1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-
1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-
1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31,-1.00E+31 $
!
...
!
```

3.9 Auxilliary data –CAVEAT file for SM/PPP STAFF-SA – PSDNEG

3.9.1 Format: CEF

3.9.2 Standard: cf 2.2.

3.9.3 Production Procedure: cf 2.3.2.

3.9.4 Quality Control Procedure: cf 2.4.2.

3.9.5 Delivery Procedure

Secured ftp from LPP (lantana.lpp.polytechnique.fr) to ESTEC (caa.estec.esa.int).

3.9.6 Product Specification

One CEF file per day and per satellite.

This CEF file contains the caveats for the SM/PPP datasets from the STAFF-SA instrument. For a given time and frequency, this caveat file indicates the PSD negative values that have been replaced in the PSD data product by a fillvalue.

3.9.7 Dataset metadata description

The detached dataset header is called:
C1/C2/C3/C4_CH_STA_SA_PSDNEG_CAVEATS.ceh.

In this header, only the static parameters (global metadata, support data and data themselves description) are included.

- First, the following **global metadata** keywords:

- DATASET_ID = C1/C2/C3/C4_CQ_STA_SA_PSDNEG_CAVEATS
 - DATA_TYPE = "CQ"
 - DATASET_TITLE = "PSD negative value"
 - CONTACT_COORDINATES =
"Rodrigue Piberne>Archive Manager>rodrigue.piberne@lpp.polytechnique.fr"
"Olga Alexandrova>Co-I>olga.alexandrova@obspm.fr"
- DATASET_DESCRIPTION = "This dataset contains caveats for the SM datasets from the STAFF-SA instrument. For a given time and frequency are given the PSD negative values that have been replaced in the PSD data product by a fillvalue.
PROCESSING_LEVEL = "Auxilliary"

- Then, the following **Support data**:

Data are indexed by the **following variables**:

& **Time** which is the ISO time of data acquisition (Universal Time). Its properties are:

- PARAMETER_TYPE = "Support_Data"
- CATDESC = "Time tag"
- VALUE_TYPE = ISO_TIME
- UNITS = "s"
- SI_CONVERSION = "1.0>s"
- DELTA_MINUS = 0
- DELTA_PLUS = 0
- SIGNIFICANT_DIGITS = 24
- FILLVAL = 9999-12-31T23:59:99.999Z
- FIELDNAM = "UT Time"
- LABLAXIS = "UT"

Data themselves:

& **Text__C1/C2/C3/C4_CQ_STA_SA_PSDNEG_CAVEATS** variable stores the polar angle of the direction of propagation in MFA coordinate system (SVD).

- PARAMETER_TYPE = "Data"
- ENTITY = "Instrument"
- VALUE_TYPE = CHAR
- PROPERTY = "Status"
- CATDESC = "PSD negative values used to compute the SM."
- UNITS = "Unitless"
- SI_CONVERSION = "1>unitless"
- SIGNIFICANT_DIGITS = 85
- FIELDNAM = "Caveats."
- FILLVAL = "NA"
- DEPEND_0 = Time__C1_CQ_STA_SA_PSDNEG_CAVEATS
- QUALITY = 0

3.9.8 File Metadata Specification

The CEF file includes a detached dataset header called: **C1/C2/C3/C4_CH_STA_PSDNEG_CAVEATS.cef** described above.

The CEF contains only the static parameters (file and global metadata).

- The following file **metadata** keywords:

- FILE_NAME = C1/C2/C3/C4_CQ_STA_PSDNEG_CAVEATS__20010402_V01.cef
- FILE_FORMAT_VERSION = "CEF-2.0"
- END_OF_RECORD_MARKER = "\$"

- And the following **global metadata** keywords:

- FILE_TYPE = "cef"
- LOGICAL_FILE_ID = "C1/C2/C3/C4_CP_STA_SA_PSDNEG__CAVEATS__20010402_V01"
- DATASET_VERSION = "01"
- VERSION_NUMBER = "01"
- METADATA_TYPE = "CAA"
- METADATA_VERSION = "2.0"
- FILE_TIME_SPAN = ex. 2001-04-02T00:00:00.000Z/2001-04-02T23:59:59.999Z
- GENERATION_DATE = ex. 2009-11-30T17:15:38.000Z
- FILE_CAVEATS = " Produced using software version 2.2 of September 2011 "

3.9.9 Dataset header example

Example: C1_CH_STA_SA_PSDNEG_CAVEATS.ceh

```
!CEH VALIDATION 07 August 2015 by LPP, header V04, (RP)
!
START META = DATASET ID
  ENTRY = "C1 CQ STA SA PSDNEG CAVEATS"
END META = DATASET ID
!
START META = DATA TYPE
  ENTRY = "CQ"
END META = DATA TYPE
!
START META = DATASET TITLE
  ENTRY = "PSD negative value"
END META = DATASET TITLE
!
START META = CONTACT COORDINATES
  ENTRY = "Rodrique Piberne>Archive Manager>rodrique.piberne@lpp.polytechnique.fr"
  ENTRY = "Olga Alexandrova>Co-I>olga.alexandrova@obspm.fr"
END META = CONTACT COORDINATES
!
START META = DATASET DESCRIPTION
  ENTRY = "This dataset contains caveats for the SM datasets from "
  ENTRY = "the STAFF-SA instrument."
  ENTRY = "For a given time and frequency are given"
  ENTRY = "the PSD negative values that have been replaced"
  ENTRY = "in the PSD data product by a fillvalue."
END META = DATASET DESCRIPTION
!
START META = PROCESSING LEVEL
  ENTRY = "Auxiliary"
END META = PROCESSING LEVEL
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                           Variables    !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
START VARIABLE = Time  C1 CQ STA SA PSDNEG CAVEATS
  PARAMETER TYPE      = "Support Data"
  CATDESC             = "Time tag"
  VALUE TYPE          = ISO TIME
  UNITS                = "s"
  SI CONVERSION       = "1.0>s"
  DELTA MINUS         = 0.0
  DELTA PLUS          = 0.0
  SIGNIFICANT DIGITS = 24
  FILLVAL             = 9999-12-31T23:59:59.999Z
  FIELDNAM            = "UT Time"
  LABLAXIS            = "UT"
END VARIABLE = Time  C1 CQ STA SA PSDNEG CAVEATS
!
START_VARIABLE = Text  C1 CQ STA SA PSDNEG CAVEATS
```



```
END META = DATASET CAVEATS
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
! Data !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
DATA UNTIL = EOF
! PSD negative values:
! Each block of data is organized this way:
!
! |"ISO-TIME", "f=55.6812 Hz PSD Bxx=-8.76E-12 nT^2 Hz^-1 " $
! |"ISO-TIME", "f=353.5534 Hz PSD Exx=-4.98E-05 mV^2 m^-2 Hz^-1" $
!
2001-04-02T01:41:42.765Z, "f=55.6812 Hz PSD Bxx=-7.39E-14 nT^2 Hz^-1 " $
2001-04-02T02:30:43.695Z, "f=55.6812 Hz PSD Bxx=-3.40E-12 nT^2 Hz^-1 " $
2001-04-02T02:32:16.692Z, "f=445.4493 Hz PSD Exx=-9.54E-09 mV^2 m^-2 Hz^-1 " $
2001-04-02T02:48:22.669Z, "f=445.4493 Hz PSD Exx=-7.73E-08 mV^2 m^-2 Hz^-1 " $
2001-04-02T02:48:50.668Z, "f=445.4493 Hz PSD Exx=-7.74E-08 mV^2 m^-2 Hz^-1 " $
2001-04-02T02:49:38.667Z, "f=445.4493 Hz PSD Exx=-1.77E-09 mV^2 m^-2 Hz^-1 " $
2001-04-02T02:49:53.667Z, "f=445.4493 Hz PSD Exx=-1.52E-07 mV^2 m^-2 Hz^-1 " $
!
...
!
```

3.10 Auxilliary data – CAVEAT file for PPP STAFF-SA – UNDEFINED MFA CAVEATS

3.10.1 Format: CEF

3.10.2 Standard: cf 2.2.

3.10.3 Production Procedure: cf 2.3.2.

3.10.4 Quality Control Procedure: cf 2.4.2.

3.10.5 Delivery Procedure

Secured ftp from LPP (lantana.lpp.polytechnique.fr) to ESTEC (caa.estec.esa.int).

3.10.6 Product Specification

One CEF file per day and per satellite.
This CEF contains caveats for the PPP (L3) datasets from the STAFF-SA instrument.
Here are given times where there are either low coverage FGM data or low auxiliary data time coverage to transform SM data in MFA coordinate system.

3.10.7 Dataset metadata description

The detached dataset header is called:
C1/C2/C3/C4_CH_STA_SA_UNDEFINED_MFA_CAVEATS.ceh.

In this header, only the static parameters (global metadata, support data and data themselves description) are included.

- First, the following **global metadata** keywords:

- DATASET_ID = C1/C2/C3/C4_CQ_STA_SA_ UNDEFINED_MFA_CAVEATS
- DATA_TYPE = "CQ"
- DATASET_TITLE = " Reason of undefined MFA coordinate system "
- CONTACT_COORDINATES =
"Rodrigue Piberne>Archive Manager>rodrigue.piberne@lpp.polytechnique.fr"
"Ondrej Santolik>Co-I>ondrej.santolik@mff.cuni.cz"
"Olga Alexandrova>Co-I>olga.alexandrova@obspm.fr"
DATASET_DESCRIPTION = "caveats for the PPP (L3) datasets from the STAFF-SA instrument. Here are given times where there are either low coverage FGM data or low auxiliary data time coverage to transform SM data in MFA coordinate system."
PROCESSING_LEVEL = "Auxilliary"

- Then, the following **Support data**:

Data are indexed by the **following variables**:

& Time which is the ISO time of data acquisition (Universal Time). Its properties are:

- PARAMETER_TYPE = "Support_Data"
- CATDESC = "Time tag"
- VALUE_TYPE = ISO_TIME
- UNITS = "s"
- SI_CONVERSION = "1.0>s"
- DELTA_MINUS = 0
- DELTA_PLUS = 0
- SIGNIFICANT_DIGITS = 24
- FILLVAL = 9999-12-31T23:59:99.999Z
- FIELDNAM = "UT Time"
- LABLAXIS = "UT"

Data themselves:

& Text_C1/C2/C3/C4_CQ_STA_SA_ UNDEFINED MFA_CAVEATS variable stores the reason of undefined MFA coordinate system.

- PARAMETER_TYPE = "Data"
- ENTITY = "Instrument"
- VALUE_TYPE = CHAR
- PROPERTY = "Status"
- CATDESC = " Reason of undefined MFA coordinate system."
- UNITS = "Unitess"
- SI_CONVERSION = "1>unitless"
- SIGNIFICANT_DIGITS = 85

- FIELDNAM = "Caveats."
- FILLVAL = "NA"
- DEPEND_0 = Time__C1_CQ_STA_SA_UNDEFINED_MFA_CAVEATS
- QUALITY = 0

3.10.8 File Metadata Specification

The CEF file includes a detached dataset header called: **C1/C2/C3/C4_CH_STA_UNDEFINED_MFA_CAVEATS.ceh** described above.

The CEF contains only the static parameters (file and global metadata).

- The following file **metadata** keywords:

- FILE_NAME = C1/C2/C3/C4_CQ_STA_SA_UNDEFINED_MFA_CAVEATS__20010402_V04.cef
- FILE_FORMAT_VERSION = "CEF-2.0"
- END_OF_RECORD_MARKER = "\$"

- And the following **global metadata** keywords:

- FILE_TYPE = "cef"
- LOGICAL_FILE_ID = "C1_CQ_STA_SA_UNDEFINED_MFA_CAVEATS__20010402_V04"
- DATASET_VERSION = "04"
- VERSION_NUMBER = "04"
- METADATA_TYPE = "CAA"
- METADATA_VERSION = "2.0"
- FILE_TIME_SPAN = ex. 2001-04-02T00:00:00.000Z/2001-04-02T23:59:59.999Z
- GENERATION_DATE = ex. 2009-11-30T17:15:38.000Z
- FILE_CAVEATS = "Prassadco software: Module read_N2SA(2011Sep30). Caa software version 2.0 of July 2009."

3.10.9 Dataset header example

Example: C1_CH_STA_SA_UNDEFINED_MFA_CAVEATS.ceh

```
!CEH VALIDATION 22 March 2016 by LPP, header V03, (RK,RP)
!
START META = DATASET ID
ENTRY = "C1 CQ STA SA UNDEFINED MFA CAVEATS"
END META = DATASET ID
!
START META = DATA TYPE
ENTRY = "CQ"
END META = DATA TYPE
!
START META = DATASET TITLE
ENTRY = "Reason of undefined MFA coordinate system"
END META = DATASET TITLE
!
START META = CONTACT COORDINATES
```

```

ENTRY = "Rodrigue Piberne>Archive Manager>rodrigue.piberne@lpp.polytechnique.fr"
ENTRY = "Ondrej Santolik>Co-I>ondrej.santolik@mff.cuni.cz"
ENTRY = "Olga Alexandrova>Co-I>olga.alexandrova@obspm.fr"
END META = CONTACT COORDINATES
!
START META = DATASET DESCRIPTION
ENTRY = "This dataset contains caveats for the PPP (L3) datasets from "
ENTRY = "the STAFF-SA instrument."
ENTRY = "Here are given times where there are either low coverage FGM data or"
ENTRY = "low auxiliary data time coverage to transform SM data in MFA coordinate system."
END META = DATASET DESCRIPTION
!
START META = PROCESSING LEVEL
ENTRY = "Auxiliary"
END META = PROCESSING LEVEL
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                                   Variables      !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
START VARIABLE = Time   C1 CQ STA SA UNDEFINED MFA CAVEATS
PARAMETER TYPE         = "Support Data"
CATDESC                = "Time tag"
VALUE TYPE             = ISO TIME
UNITS                  = "s"
SI CONVERSION          = "1.0>s"
DELTA MINUS            = 0.0
DELTA PLUS             = 0.0
SIGNIFICANT DIGITS    = 24
FILLVAL                = 9999-12-31T23:59:59.999Z
FIELDNAM               = "UT Time"
LABLAXIS               = "UT"
END VARIABLE = Time   C1 CQ STA SA UNDEFINED MFA CAVEATS
!
START VARIABLE = Text   C1 CQ STA SA UNDEFINED MFA CAVEATS
PARAMETER TYPE         = "Data"
ENTITY                 = "Instrument"
VALUE TYPE             = CHAR
PROPERTY               = "Status"
CATDESC                = "Reason of undefined MFA coordinate system"
UNITS                  = "unitless"
SI CONVERSION          = "1>unitless"
SIGNIFICANT DIGITS    = 85
FIELDNAM               = "Caveats"
FILLVAL                = "NA"
DEPEND 0               = Time   C1 CQ STA SA UNDEFINED MFA CAVEATS
QUALITY                = 0
END VARIABLE = Text   C1 CQ STA SA UNDEFINED MFA CAVEATS
!

```

3.10.10 Dataset file example

Version 04: C1_CQ_STA_SA_UNDEFINED_MFA_CAVEATS__20010402_V04.cef

```

!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                                   File Metadata      !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
FILE NAME = "C1 CQ STA SA UNDEFINED MFA CAVEATS 20010402 V04.cef"
FILE FORMAT VERSION = "CEF-2.0"
END OF RECORD MARKER = "$"
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                                   Global Metadata      !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
INCLUDE= CL CH MISSION.cef           ! Mission level metadata.
!
INCLUDE= C1 CH OBS.cef               ! Observatory level metadata.
!
INCLUDE= CL CH STA.cef               ! Experiment level metadata.
!
INCLUDE= C1 CH STA SA.cef            ! Instrument level metadata.
!
INCLUDE= C1 CH STA SA UNDEFINED MFA CAVEATS.cef ! Dataset level metadata.

```



```

!
START META = DATASET VERSION
  ENTRY = "04"
END META = DATASET VERSION
!
START META = LOGICAL FILE ID
  ENTRY = "C1 CQ STA SA UNDEFINED MFA CAVEATS 20010402 V04"
END META = LOGICAL FILE ID
!
START META = FILE TYPE
  ENTRY = "cef"
END META = FILE TYPE
!
START META = VERSION NUMBER
  ENTRY = "04"
END META = VERSION NUMBER
!
START META = METADATA TYPE
  ENTRY = "CAA"
END META = METADATA TYPE
!
START META = METADATA VERSION
  ENTRY = "2.0"
END META = METADATA VERSION
!
START META = FILE TIME SPAN
  VALUE TYPE = ISO TIME RANGE
  ENTRY = "2001-04-02T00:00:00.000Z/2001-04-02T23:59:59.999Z"
END META = FILE TIME SPAN
!
START META = GENERATION DATE
  VALUE TYPE = ISO TIME
  ENTRY = "2016-03-05T00:44:06.329Z"
END META = GENERATION DATE
!
START META = FILE CAVEATS
  ENTRY = "Prassadco software:"
  ENTRY = "Module read N2SA(2011Sep30)"
  ENTRY = "Caa software version 2.0 of July 2009"
END META = FILE CAVEATS
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                                       Data      !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
! UNDEFINED MFA for a given time
! Each block of data is organized this way:
!
! |"ISO-TIME","Low attitude coverage" $
! | or
! |"ISO-TIME","Low FGM coverage" $
!
!
!
DATA UNTIL = EOF
!
2001-04-02T01:37:16.692Z, "Low FGM coverage" $
2001-04-02T01:37:20.692Z, "Low FGM coverage" $
2001-04-02T01:37:24.692Z, "Low FGM coverage" $
2001-04-02T01:37:28.692Z, "Low FGM coverage" $
...
  
```

3.11 Auxilliary data – CAVEAT file for PSD/SM/PPP STAFF-SA – PROBEFAIL_CAVEATS

3.11.1 Format: CEF

3.11.2 Standard: cf 2.2.

3.11.3 Production Procedure: cf 2.3.2.

3.11.4 Quality Control Procedure: cf 2.4.2.

3.11.5 Delivery Procedure

Secured ftp from LPP (lantana.lpp.polytechnique.fr) to ESTEC (caa.estec.esa.int).

3.11.6 Product Specification

One CEF file per satellite.

This CEF file contains the caveats for the PSD/SM/PPP datasets from the STAFF-SA instrument.

This caveats dataset provides the users time interval when EFW electric probes have problems and what to do with such data.

3.11.7 Dataset metadata description

The detached dataset header is called: **C1/C2/C3/C4_CQ_STA_SA_PROBEFAIL_CAVEATS.ceh.**

In this header, only the static parameters (global metadata, support data and data themselves description) are included.

- First, the following **global metadata** keywords:

- DATASET_ID = C1/C2/C3/C4_CQ_STA_SA_PROBEFAIL_CAVEATS
- DATA_TYPE = "CQ"
- DATASET_TITLE = " Probe failure consequences"
- CONTACT_COORDINATES =
"Patrick Canu>PI>patrick.canu@lpp.polytechnique.fr"
"Nicole Cornilleau-Wehrin>Deputy-PI>nicole.cornilleau@lpp.polytechnique.fr"

DATASET_DESCRIPTION = "This dataset contains caveats for some STAFF SA datasets. This caveats dataset provides the users time interval when probes have problems and what to do with such data."

- PROCESSING_LEVEL = "Auxilliary"

- Then, the following **Support data**:

& Time_range which the ISO time range where other parameters are valid. Its properties are:

- CATDESC = "Time interval with probe failure."
- VALUE_TYPE = ISO_TIME_RANGE
- UNITS = "s"
- SI_CONVERSION = "1.0>s"
- SIZES = 1
- SIGNIFICANT_DIGITS = 49
- FILLVAL = 9999-12-31T23:59:59.999Z/9999-12-31T23:59:59.999Z
- FIELDNAM = " Universal Time Range"
- LABLAXIS = "UT"

3.11.8 File Metadata Specification

The CEF file includes a detached dataset header called: **C1/C2/C3/C4_CQ_STA_SA_PROBEFAIL_CAVEATS.cef** described above.

The CEF file contains only the static parameters (file and global metadata).

- The following file **metadata** keywords:

- FILE_NAME = C1/C2/C3/C4_CP_STA_NOTSRP__20010402_V01.cef
- FILE_FORMAT_VERSION = "CEF-2.0"
- END_OF_RECORD_MARKER = "\$"

- And the following **global metadata** keywords:

- FILE_TYPE = "cef"
- LOGICAL_FILE_ID = "C1/C2/C3/C4_CQ_STA_SA_PROBEFAIL_CAVEATS__20010101_V02 "
- DATASET_VERSION = "02"
- VERSION_NUMBER = "02"
- METADATA_TYPE = "CAA"
- METADATA_VERSION = "2.0"
- FILE_TIME_SPAN = ex. 2001-01-01T00:00:00.000Z/2025-12-31T23:59:59.999Z
- GENERATION_DATE = ex. 2017-02-10T12:15:20.000Z

3.11.9 Dataset header example


```

PROPERTY           = "Status"
CATDESC            = "Reason why data should be used carefully"
UNITS              = "unitless"
SI CONVERSION      = "1>unitless"
SIGNIFICANT DIGITS = 40
FIELDNAM           = "Reason"
FILLVAL            = "NA"
DEPEND 0           = Time range C1 CQ STA SA PROBEFAIL CAVEATS
QUALITY            = 0
END VARIABLE = Reason C1 CQ STA SA PROBEFAIL CAVEATS
!
```

3.11.10 Dataset file example

Version 02: C1_CQ_STA_SA_PROBEFAIL_CAVEATS__20010101_V02.cef

```

!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                                   !
!                                                                                   !
!                                                                                   !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                                   !
!                                                                                   !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
FILE NAME = "C1 CQ STA SA PROBEFAIL CAVEATS 20010101 V02.cef"
FILE FORMAT VERSION = "CEF-2.0"
END OF RECORD MARKER = "$"
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                                   !
!                                                                                   !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
INCLUDE= CL CH MISSION.cef                                             ! Mission level metadata.
!
INCLUDE= C1 CH OBS.cef                                                 ! Observatory level metadata.
!
INCLUDE= CL CH STA.cef                                                 ! Experiment level metadata.
!
INCLUDE= C1 CH STA SA.cef                                             ! Instrument level metadata.
!
INCLUDE= C1 CQ STA SA PROBEFAIL CAVEATS.cef                         ! Dataset Caveat level metadata.
!
START META = DATASET VERSION
ENTRY = "02"
END META = DATASET VERSION
!
START META = LOGICAL FILE ID
ENTRY = "C1 CQ STA SA PROBEFAIL CAVEATS 20010101 V02"
END META = LOGICAL FILE ID
!
START META = FILE TYPE
ENTRY = "cef"
END META = FILE TYPE
!
START META = VERSION NUMBER
ENTRY = "02"
END META = VERSION NUMBER
!
START META = METADATA TYPE
ENTRY = "CAA"
END META = METADATA TYPE
!
START META = METADATA VERSION
ENTRY = "2.0"
END META = METADATA VERSION
!
START META = FILE TIME SPAN
VALUE TYPE = ISO TIME RANGE
ENTRY = 2001-01-01T00:00.000Z/2025-12-31T23:59:59.999Z
END META = FILE TIME SPAN
!
START META = GENERATION DATE
VALUE TYPE = ISO TIME
ENTRY = 2017-02-10T12:15:20.000Z
END META = GENERATION DATE
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                                   !
!                                                                                   !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                                   !
!                                                                                   !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
```

```

! Data quality definition as defined in the STAFF User Guide, table 5
!
! 4 : good quality
! 2 : no saturation - caution to absolute values :
!   2a : one probe is set to zero (density mode, V=0) ;
!       power underestimated : ~0.625 of the power in mV2 m-1 Hz-1
!   2b : 2 probes are set to zero : power underestimated by a factor of 2
!       (~0.5 of the power in mV2 m-1 Hz-1)
! 1 : don't consider band A data (8-64 Hz, the 9 lower frequency data points)
!     because of solar aspect angle is close to 90 degrees
! 0 : one component saturates; do not consider using STAFF SA electric component
!     or E field deduced parameters (Poynting Vector component)
! 0* : many successive operations
! XX : special tests; be cautious
!
!
DATA UNTIL = EOF
2001-01-01T00:00:00.000Z/2001-12-28T03:02:56.999Z,"4           ","Normal  behaviour
","Normal behaviour          "$
2001-12-28T03:02:57.000Z/2002-01-26T23:59:59.999Z,"0           ","Be cautious may saturate
","Probe 1 failure          "$
2002-01-27T00:00:00.000Z/2007-06-12T23:59:59.999Z,"2a           ","Power to be multiplied by ~1.6
","Probe 1 permanently in density mode, V=0 "$
2007-06-13T00:00:00.000Z/2007-06-13T23:59:59.999Z,"XX           ","Dont    use
","Special operations       "$
2007-06-14T00:00:00.000Z/2009-04-19T07:29:00.000Z,"2a           ","Power to be multiplied by ~1.6
","Probe 1 permanently in density mode, V=0 "$
2009-04-19T07:29:00.001Z/2009-05-07T17:44:21.999Z,"0           ","Be cautious may saturate
","Probe 4 failure          "$
2009-05-07T17:44:22.000Z/2009-10-14T06:59:59.999Z,"2a           ","Power to be multiplied by ~1.6
","Probe 4 restarts working "$
2009-10-14T07:00:00.001Z/2009-11-27T23:59:59.999Z,"0           ","Be cautious may saturate
","Probe 4 failure          "$
2009-11-28T00:00:00.000Z/2014-05-18T23:59:59.999Z,"2b           ","Power to be multiplied by ~2.
","Probe 4 permanently in density mode, V=0 "$
2014-05-19T00:00:00.000Z/2025-12-31T23:59:59.999Z,"1 or 2b","1 if F lt 64Hz (A band), else 2
","Due to solar aspect angle "
!

```

3.12 Auxilliary data –CAVEAT file for STAFF data – NOTSRP

3.12.1 Format: CEF

3.12.2 Standard: cf 2.2.

3.12.3 Production Procedure: cf 2.3.2.

3.12.4 Quality Control Procedure: cf 2.4.2.

3.12.5 Delivery Procedure

Secured ftp from LPP (lantana.lpp.polytechnique.fr) to ESTEC (caa.estec.esa.int).

3.12.6 Product Specification

One CEF file per day and per satellite.

This CEF file contains the caveats for the PSD/SM/PPP datasets from the STAFF-SA instrument and for the CWF/CS datasets from the STAFF-SC instrument.

This caveats dataset provides the users time interval when no Sun pulse (TSRP) was recorded in the S/C housekeeping data. Note that it can be in eclipse period but not especially.

3.12.7 Dataset metadata description

The detached dataset header is called:
C1/C2/C3/C4_CH_STA_NOTSRP_CAVEATS.ceh.

In this header, only the static parameters (global metadata, support data and data themselves description) are included.

- First, the following **global metadata** keywords:

- DATASET_ID = C1/C2/C3/C4_CQ_STA_NOTSRP_CAVEATS
- DATA_TYPE = "CQ"
- DATASET_TITLE = "Time Interval with no TSRP"
- CONTACT_COORDINATES =

"Patrick Canu>PI>patrick.canu@lpp.polytechnique.fr"

"Nicole Cornilleau-Wehrin>Deputy-PI>nicole.cornilleau@lpp.polytechnique.fr"

- "Rodrigue Piberne>Archive Manager>rodrigue.piberne@lpp.polytechnique.fr"
- DATASET_DESCRIPTION = "This dataset contains caveats for some of the STAFF datasets. It provides the users time intervals when no Sun pulse (TSRP) was recorded in the S/C housekeeping data. Note that it can be in eclipse period but not especially."
- PROCESSING_LEVEL = "Auxilliary"

- Then, the following **Support data**:

& Time_range which the ISO time interval (Universal Time) with no TSRP in the S/C housekeeping. Its properties are:

- CATDESC = "Time intervals with no TSRP in the S/C housekeeping."
- VALUE_TYPE = ISO_TIME_RANGE
- UNITS = "s"
- SI_CONVERSION = "1.0>s"
- SIZES = 1
- SIGNIFICANT_DIGITS = 49
- FILLVAL = 9999-12-31T23:59:59.999Z/9999-12-31T23:59:59.999Z
- FIELDNAM = "Universal Time Range"
- LABLAXIS = "UT"

3.12.8 File Metadata Specification

The CEF file includes a detached dataset header called: **C1/C2/C3/C4_CH_STA_NOTSRP_CAVEATS.ceh** described above.

The CEF contains only the static parameters (file and global metadata).

- The following file **metadata** keywords:

- FILE_NAME =
C1/C2/C3/C4_CQ_STA_NOTSRP_CAVEATS__20010402_V01.cef
- FILE_FORMAT_VERSION = "CEF-2.0"
- END_OF_RECORD_MARKER = "\$"

- And the following **global metadata** keywords:

- FILE_TYPE = "cef"
- LOGICAL_FILE_ID =
"C1/C2/C3/C4_CP_STA_SA_NOTSRP_CAVEATS__20010402_V01"
- DATASET_VERSION = "01"
- VERSION_NUMBER = "01"
- METADATA_TYPE = "CAA"
- METADATA_VERSION = "2.0"
- FILE_TIME_SPAN = ex. 2001-04-02T00:00:00.000Z/2001-04-02T23:59:59.999Z
- GENERATION_DATE = ex. 2009-11-30T17:15:38.000Z
- FILE_CAVEATS = "Produced using software version 2.2 of September 2011 "

3.12.9 Dataset header example

Example: C1_CH_STA_SA_NOTSRP_CAVEATS.ceh

```
!CEH VALIDATION 09 May 2012 by LPP, header V02, (RP)
!
START META = DATASET ID
ENTRY = "C1 CQ STA NOTSRP CAVEATS"
END META = DATASET ID
!
START META = DATA TYPE
ENTRY = "CQ"
END META = DATA TYPE
!
START META = DATASET TITLE
ENTRY = "Time Intervals with no TSRP"
END META = DATASET TITLE
!
START META = CONTACT COORDINATES
ENTRY = "Patrick Canu>PI>patrick.canu@lpp.polytechnique.fr"
ENTRY = "Nicole Cornilleau-Wehrin>Deputy-PI>nicole.cornilleau@lpp.polytechnique.fr"
ENTRY = "Rodrigue Piberne>Archive Manager>rodrique.piberne@lpp.polytechnique.fr"
END META = CONTACT COORDINATES
!
START META = DATASET DESCRIPTION
ENTRY = "This dataset contains caveats for some of the STAFF datasets."
ENTRY = "It provides the users time intervals when"
ENTRY = "no Sun pulse (TSRP) was recorded in the S/C housekeeping data."
ENTRY = "Note that it can be in eclipse period but not especially."
END META = DATASET DESCRIPTION
!
START META = PROCESSING LEVEL
ENTRY = "Auxiliary"
END META = PROCESSING LEVEL
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                                   Variables      !
```



```

!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
START VARIABLE = Time range  C1 CQ STA NOTSRP CAVEATS
VALUE TYPE      = ISO TIME RANGE
CATDESC        = "Time intervals with no TSRP in the S/C housekeeping."
UNITS          = "s"
SI CONVERSION   = "1.0>s"
SIZES          = 1
SIGNIFICANT DIGITS = 49
FILLVAL        = 9999-12-31T23:59:59.999Z/9999-12-31T23:59:59.999Z
FIELDNAM       = "Universal Time Range"
LABLAXIS       = "UT"
END VARIABLE = Time range  C1 CQ STA NOTSRP CAVEATS
!

```

3.12.10 Dataset file example

Version 01: C1_CQ_STA_SA_NOTSRP_CAVEATS__20010401_V01.cef

```

!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                     File Metadata      !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
FILE NAME = "C1 CQ STA SA NOTSRP CAVEATS 20010401 V01.cef"
FILE FORMAT VERSION = "CEF-2.0"
END OF RECORD MARKER = "$"
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                     Global Metadata      !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
INCLUDE= CL CH MISSION.cef             ! Mission level metadata.
!
INCLUDE= C1 CH OBS.cef                 ! Observatory level metadata.
!
INCLUDE= CL CH STA.cef                 ! Experiment level metadata.
!
INCLUDE= C1 CH STA SA.cef              ! Instrument level metadata.
!
INCLUDE= C1 CH STA SA NOTSRP CAVEATS.cef !Dataset Caveat level metadata.
!
START META = DATASET VERSION
ENTRY = "01"
END META = DATASET VERSION
!
START META = LOGICAL FILE ID
ENTRY = "C1 CQ STA SA NOTSRP CAVEATS 20010401 V01"
END META = LOGICAL FILE ID
!
START META = FILE TYPE
ENTRY = "cef"
END META = FILE TYPE
!
START META = VERSION NUMBER
ENTRY = "01"
END META = VERSION NUMBER
!
START META = METADATA TYPE
ENTRY = "CAA"
END META = METADATA TYPE
!
START META = METADATA VERSION
ENTRY = "2.0"
END META = METADATA VERSION
!
START META = FILE TIME SPAN
VALUE TYPE = ISO TIME RANGE
ENTRY = 2001-04-01T00:00.000Z/2001-04-01T23:59:59.999Z
END META = FILE TIME SPAN
!
START META = GENERATION DATE
VALUE TYPE = ISO TIME
ENTRY = 2009-11-30T17:14:15.000Z
END META = GENERATION DATE
!
START META = DATASET CAVEATS
ENTRY = "Produced using software version 2.0 of July 2009"

```

```
END META = DATASET CAVEATS
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
! Data !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
DATA UNTIL = EOF
! No time of the Sun Reference Pulse (TSRP) in the S/C housekeeping
! data during the following time intervals:
2001-04-01T00:30:39.371Z/2001-04-01T00:30:47.384Z $
2001-04-01T01:18:08.175Z/2001-04-01T01:18:16.189Z $
2001-04-01T02:05:36.980Z/2001-04-01T02:05:49.000Z $
2001-04-01T03:40:58.630Z/2001-04-01T03:41:06.644Z $...
!
```

3.13 Auxilliary data –CAVEAT file for STAFF data – CALIBRATION

3.13.1 Format: CEF

3.13.2 Standard: cf 2.2.

3.13.3 Production Procedure: cf 2.3.2.

3.13.4 Quality Control Procedure: cf 2.4.2.

3.13.5 Delivery Procedure

Secured ftp from LPP (lantana.lpp.polytechnique.fr) to ESTEC (caa.estec.esa.int).

3.13.6 Product Specification

One CEF file per day and per satellite.
This CEF file contains the caveats for the STAFF datasets.
This caveats dataset provides the users time where there is an onboard calibration.

3.13.7 Dataset metadata description

The detached dataset header is called:
C1/C2/C3/C4_CH_STA_CALIBRATION_CAVEATS.ceh.

In this header, only the static parameters (global metadata, support data and data themselves description) are included.

- First, the following **global metadata** keywords:

- DATASET_ID = C1/C2/C3/C4_CP_STA_CALIBRATION_CAVEATS
- DATA_TYPE = "CQ"
- DATASET_TITLE = "Information concerning onboard calibration"
- CONTACT_COORDINATES =
"Patrick Canu>PI>patrick.canu@lpp.polytechnique.fr"
"Nicole Cornilleau-Wehrin>Deputy-PI>nicole.cornilleau@lpp.polytechnique.fr"
- DATASET_DESCRIPTION = "This dataset contains caveats indicating when the STAFF instruments are in calibration mode."
- PROCESSING_LEVEL = "Auxilliary"

- Then, the following **Support data**:

& Time which the ISO time of data acquisition (Universal Time). Its properties are:

- PARAMETER_TYPE = "Support_Data"
- CATDESC = "Time tag"
- VALUE_TYPE = ISO_TIME
- UNITS = "s"
- SI_CONVERSION = "1.0>s"
- DELTA_MINUS = 0
- DELTA_PLUS = 0
- SIGNIFICANT_DIGITS = 24
- FILLVAL = 9999-12-31T23:59:99.999Z
- FIELDNAM = "UT Time"
- LABLAXIS = "UT"

& Text to show that it is an onboard calibration

- PARAMETER_TYPE = "Data"
- ENTITY = "Instrument"
- VALUE_TYPE = CHAR
- PROPERTY = "Status"
- CATDESC = "Calibration mode is active"
- UNITS = "unitless"
- SI_CONVERSION = "1>unitless"
- SIGNIFICANT_DIGITS = 18
- FIELDNAM = "Caveats"
- FILLVAL = "NA"
- DEPEND_0 = Time__C1_CQ_STA_CALIBRATION_CAVEATS
- QUALITY = 0

3.13.8 File Metadata Specification

CEF file includes a detached dataset header called:
C1/C2/C3/C4_CH_STA_CALIBRATION_CAVEATS.keh described above.

The CEF file contains only the static parameters (file and global metadata).

- The following file **metadata** keywords:

- FILE_NAME = C1_CQ_STA_CALIBRATION_CAVEATS__20010109_V01.cef
- FILE_FORMAT_VERSION = "CEF-2.0"
- END_OF_RECORD_MARKER = "\$"

- And the following **global metadata** keywords:

- FILE_TYPE = "cef"
- LOGICAL_FILE_ID = "C1/C2/C3/C4_CQ_STA_CALIBRATION_CAVEATS__20010109_V01"
- DATASET_VERSION = "01"
- VERSION_NUMBER = "01"
- METADATA_TYPE = "CAA"
- METADATA_VERSION = "2.0"
- FILE_TIME_SPAN = ex. 2001-01-09T00:00:00.000000Z/2001-01-09T23:59:59.999999Z
- GENERATION_DATE = ex. 2013-05-22T15:41:13.000Z

3.13.9 Dataset header example

Example: C1_CQ_STA_CALIBRATION_CAVEATS.ceh

```
!CEH VALIDATION 15 Jan 2013 by LPP, header V01, (RP)
!
START META = DATASET ID
ENTRY = "C1 CQ STA CALIBRATION CAVEATS"
END META = DATASET ID
!
START META = DATA TYPE
ENTRY = "CQ"
END META = DATA TYPE
!
START META = DATASET TITLE
ENTRY = "Information concerning onboard calibration"
END META = DATASET TITLE
!
START META = CONTACT COORDINATES
ENTRY = "Patrick Canu>PI>patrick.canu@lpp.polytechnique.fr"
ENTRY = "Nicole Cornilleau-Wehrlin>Deputy-PI>nicole.cornilleau@lpp.polytechnique.fr"
END META = CONTACT COORDINATES
!
START META = DATASET DESCRIPTION
ENTRY = "This dataset contains caveats indicating when the STAFF instruments"
ENTRY = "are in calibration mode."
END META = DATASET DESCRIPTION
!
START META = PROCESSING LEVEL
ENTRY = "Auxiliary"
END META = PROCESSING LEVEL
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                 Variables   !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
START VARIABLE = Time  C1 CQ STA CALIBRATION CAVEATS
PARAMETER TYPE      = "Support Data"
CATDESC             = "Time tag"
VALUE TYPE          = ISO TIME
UNITS                = "s"
SI CONVERSION       = "1.0>s"
DELTA MINUS         = 0.0
```

```
DELTA PLUS = 0.0
SIGNIFICANT DIGITS = 27
FILLVAL = 9999-12-31T23:59:59.999Z
FIELDNAM = "UT Time"
LABLAXIS = "UT"
END VARIABLE = Time C1 CQ STA CALIBRATION CAVEATS
!
START VARIABLE = Text C1 CQ STA CALIBRATION CAVEATS
PARAMETER TYPE = "Data"
ENTITY = "Instrument"
VALUE TYPE = CHAR
PROPERTY = "Status"
CATDESC = "Calibration mode is active"
UNITS = "unitless"
SI CONVERSION = "1>unitless"
SIGNIFICANT DIGITS = 18
FIELDNAM = "Caveats"
FILLVAL = "NA"
DEPEND 0 = Time C1 CQ STA CALIBRATION CAVEATS
QUALITY = 0
END VARIABLE = Text C1 CQ STA CALIBRATION CAVEATS
!
```

3.13.10 Dataset file example

Ex: C1_CQ_STA_CALIBRATION_CAVEATS__20010109_V01.cef

```
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                 File Metadata !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
FILE NAME = "C1 CQ STA CALIBRATION CAVEATS 20010109 V01.cef"
FILE FORMAT VERSION = "CEF-2.0"
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!                                                                 Global Metadata !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
INCLUDE= CL CH MISSION.ceh                ! Mission level metadata.
!
INCLUDE= C1 CH OBS.ceh                    ! Observatory level metadata.
!
INCLUDE= CL CH STA.ceh                    ! Experiment level metadata.
!
INCLUDE= C1 CH STA SC.ceh                 ! Instrument level metadata.
!
INCLUDE= C1 CQ STA CALIBRATION CAVEATS.ceh ! Data level metadata.
!
START META = FILE TYPE
ENTRY = "cef"
END META = FILE TYPE
!
START META = DATASET VERSION
ENTRY = "01"
END META = DATASET VERSION
!
START META = LOGICAL FILE ID
ENTRY = "C1 CQ STA CALIBRATION CAVEATS 20010109 V01"
END META = LOGICAL FILE ID
!
START META = VERSION NUMBER
ENTRY = "01"
END META = VERSION NUMBER
!
START META = METADATA TYPE
ENTRY = "CAA"
END META = METADATA TYPE
!
START META = METADATA VERSION
ENTRY = "2.0"
END META = METADATA VERSION
!
START META = FILE TIME SPAN
VALUE TYPE = ISO TIME RANGE
ENTRY = "2001-01-09T00:00.000000Z/2001-01-09T23:59:59.999999Z"
END META = FILE TIME SPAN
!
```

```
START META = GENERATION DATE
VALUE TYPE = ISO TIME
ENTRY = "2013-05-22T15:41:13.000Z"
END META = GENERATION DATE
!
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
! Data !
!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!!
!
DATA UNTIL = "END OF FILE"
2001-01-09T15:17:11.038718Z, "Calibration data"
2001-01-09T15:17:11.078717Z, "Calibration data"
2001-01-09T15:17:11.118716Z, "Calibration data"
2001-01-09T15:17:11.158715Z, "Calibration data"
```

APPENDIX A - REFERENCES FOR STAFF DESCRIPTION

- [1] ESA-SP1159
- [2] CLU-CP-122-2021-CET “DECOMMUTATION STAFF-SC”
- [3] CLU-CP-122-2021-CET “DECOMMUTATION STAFF-SA”
- [4] DDID – CL-ESC-ID-2001.”Data Delivery Interface document”.
- [5] ftp://ftp.lpp.polytechnique.fr/robert/keep/Transfert/RCL_V2.pdf
- [6] Santolik, O.: PPropagation Analysis of STAFF-SA Data with COherency tests (PRASSADCO),
http://aurora2.troja.mff.cuni.cz/~santolik/PRASSADCO/staff_sa/guide.pdf
(2003)
- [7] DS-QMW-TN-0010 “Cluster Exchange Format – Data File Syntax”

APPENDIX B – LIST OF ACRONYMS

AGC	Automated Gain Control
ASCII	American Standard Code for Information Interchange
CAA	Cluster Active Archive
CCSDS	Consultative Committee on Space Data System
CEF	Cluster Exchange Format
CS	Complex Spectra
CETP	Centre d'étude des Environnements Terrestre et Planétaires
Co-I	Co-Investigator
DWF	Decommutated Wave Form
DWP	Digital Wave Processing
EFW	Electric Field and Wave
ESA	European Space Agency
ESTEC	European Space Research and Technology Centre
FGM	Flux Gate Magnetometer
FTP	File Transfer Protocol
GEI	Geocentric Equatorial Inertial reference frame
GSE	Geocentric Solar Ecliptic reference frame
HBR	High Bit rate
IDL	Interactive Data Language
ISR2	Inverted SR2
LESIA	Laboratoire d'Etudes Spatiales et d'Instrumentation en Astrophysique
LPP	Laboratoire de Physique des Plasmas
MFA	Magnetic Field Aligned reference frame
NBR	Normal Bit Rate
PI	Principal Investigator
PDF	Portable Document Format
PNG	Portable Network Graphics
PPP	Polarization and Propagation Parameters
PRASSADCO	Propagation Analysis of STAFF-SA data with Coherency tests
PSD	Power Spectral Density
RCL	Roproc Command Language
RFF	Roproc File Format
Roproc	Robert's procedures
SFTP	Secured-FTP
SM	Spectral Matrix
SR2	Spin Reference frame 2
SSW6RF	STAFF Sensor WEC6 Reference Frame
STAFF	Spatio-Temporal Analysis of Field Fluctuations
STAFF-SA	STAFF digital Spectrum Analyser
STAFF-SC	STAFF on-board waveform unit (SC stands for Search Coil)
SVD	Singular Value Decomposition
TED	Telemetry Extraction and Decommutation package
WEC	Wave Experiment Consortium
WECSS	WEC Sample Sync
WHISPER	Waves of High frequency and Sounder for Probing the Electron density by Relaxation