

Preparation and validation of WEC time corrections 2011

Keith Yearby, 7 March 2012

Contents

1	Introduction	2
2	Data and references	3
3	Preparation of the Point Valid DIFF measurements	4
3.1	Introduction	4
3.2	Making the file lists and obtaining the ESOC DIFFs	4
3.3	Obtaining WBD DIFFs.....	4
3.4	Summary of PVD files manually modified	4
3.5	Merging of ESOC and WBD DIFFs.....	5
3.6	Validation using 'tcaltrend'	5
3.7	Validation using 'wbdtcor'	5
4	Generation of the ASCII TCOR files	6
5	Validation of the TCOR files.....	7
6	Production of the CEF files	11
7	Caveats	11

1 Introduction

For precise time stamping of Cluster science data it is necessary to accurately determine the UT time at which each VC0 reset pulse occurs onboard. This pulse is time correlated with the transmission of the first bit of the housekeeping virtual channel (VC0) and the contents of the onboard time counter at this time is recorded in the On-board Time (OBT) field of the VC0 transfer frame (EID-A section 3.3.1.3.1 and 3.3.7.2.2). The time of the pulse is called the Spacecraft Event Time or SCET, and is given to a standard accuracy of ± 2 ms.

However for inter-spacecraft comparisons of EFW and STAFF waveform data a much higher accuracy is needed. This is achieved by preparing time correction (TCOR) files. The process is described in general in the document 'Precise reconstitution of the Spacecraft Event Time (SCET)'.

The purpose of the present document is to describe the precise procedure used for 2011. The data for January to July inclusive have already been delivered once, but an improved validation procedure resulted in some corrections being required. These data have therefore been reprocessed and are delivered together with the data for August to December as single version 2 files.

The procedure used is the same as for 2009 and 2010, with only some minor updates to software tools.

2 Data and references

Source data:

WBD online level one data.
Cluster RDM for January to July 2011.

Documents:

Precise reconstitution of the Spacecraft Event Time (SCET), Keith Yearby, 2004 July 7

Software:

Software	Version	Date
readtcal	2.6	2010-07-15
wbddiff2	2.4	2011-05-18
wbdtcor	1.3	2011-05-18
tcaltrend	1.3	2011-04-11
maketcor	5.3	2011-05-24
veritcor	1.13	2012-02-22
tcorcomp	1.4	2012-02-23
tcor2cef	1.8	2012-01-26
diffmer	1.4	2010-06-24

RDM file lists:

File name	Last modified date
11_1_shla_files.txt	2012-03-01
11_2_shla_files.txt	2012-03-01
11_3_shla_files.txt	2012-03-01
11_4_shla_files.txt	2012-03-01

Ground Station Offset file: gsotable.txt

```
# Ground station offset table for DIFFMER etc.  
# This version sets offsets for DSN and Panska Ves  
# GSID1 GSID2 OFFSET (us)  
0 79 -5  
46 46 -15  
80 81 -30  
#
```

Point Valid DIFF files:

File name	Last modified date
1108_1_diffmer.txt	2012-03-01 15:54
1108_2_diffmer.txt	2012-03-01 15:54
1108_3_diffmer.txt	2012-03-01 15:54
1108_4_diffmer.txt	2012-03-01 15:54

ASCII TCOR files:

File name	Last modified date
11_1_tcor_v.txt	2012/03/02 15:29
11_2_tcor_v.txt	2012/03/02 11:31
11_3_tcor_v.txt	2012/03/06 14:21
11_4_tcor_v.txt	2012/03/02 12:02

3 Preparation of the Point Valid DIFF measurements

3.1 Introduction

The Point Valid DIFF measurements give the difference between the actual UTC and that determined using the current time calibration (TCAL) at specific points in time. DIFF values are obtained from two sources, ESOC and WBD.

From 2007-11-24 onwards ESOC determine the time calibration during every nominal pass. This process is called a time correlation as it involves the correlation of the On Board Time with UTC. The DIFF usually remains small, typically less than 20 μ s. A linear interpolation between one time correlation and the next is normally quite sufficient to obtain DIFF to an acceptable accuracy. The DIFF value just after each time correlation can normally be assumed to be zero - this is what the time correlation achieves. The DIFF just before the same time correlation can be calculated using coefficients of the previous time correlation.

3.2 Making the file lists and obtaining the ESOC DIFFs

Many of the TCOR preparation software tools require as input a list of the full path names of the spacecraft HK (sh) and TCAL (la) files. These also include the files for the last two days of 2010 and the first two days of 2012 to ensure that time corrections can be calculated for the whole of 2011.

The ESOC DIFF values are extracted from the TCAL files on the RDM. This is done automatically using the software tool 'readtcal'. The current version also returns the identification of the ground station used for the measurement.

The TCAL summary files (11_*_tcal.txt) contain the raw TCAL SCET, OBT and TICK values. See the Cluster Data Delivery Interface Document (DDID) for more information. This TCAL information is needed by several subsequent software tools. The 11_*_tcaldiff.txt files contain the ESOC DIFF measurements derived by assuming the DIFF to be zero immediately after each new time correlation. These files contain DIFFs for the whole of 2011, but those from August to December are validated and used for this delivery.

All the above processing was automated using the batch file 'tcal2011.bat'.

3.3 Obtaining WBD DIFFs

WBD DIFFs are obtained by processing the WBD level 1 files with the software tool WBDDIFF2. As before, the accuracy of the DIFFs are checked by comparing each WBD measurement with a linear interpolation between the nearest validated ESOC (TCAL) measurements before and after. This interpolation is now done in SCET/OBT values rather than directly in DIFF.

3.4 Summary of PVD files manually modified

All the DIFF files were manually modified to remove errors found during validation. DIFF measurements at the following times were removed.

Spacecraft	Time	GSID
1	2011-09-03T23:53:34	3
1	2011-09-03T23:54:34	3
1	2011-12-05T14:43:22	8
1	2011-12-05T14:44:22	8
2	2011-12-06T18:43:01	8
2	2011-12-06T18:44:01	8
3	2011-12-08T19:03:14	8
3	2011-12-08T19:04:14	8

3	2011-12-09T16:52:45	8
3	2011-12-09T16:53:45	8
3	2011-12-11T17:35:57	8
3	2011-12-11T17:36:57	8
4	2011-12-10T19:29:20	8
4	2011-12-10T19:30:20	8

On spacecraft 1, the following DIFF measurements were inserted.

Manually inserted from WBD				
2011-12-15T05:09:55	13	1	24	80229552

Manually inserted from quadratic interpolation				
2011-12-15T18:00:00	10	1	99	-1

3.5 Merging of ESOC and WBD DIFFs

The ESOC and WBD DIFF measurements are merged together. The output files (1108_*_diffmer.txt) contain mainly ESOC measurements with WBD points inserted only when they are separated by more than 8 hours in time (0.1 hours for SC4) from the nearest ESOC point, and differ by more than 10 μ s from a linear interpolation of the ESOC points.

3.6 Validation using 'tcaltrend'

The long term trends of the clock drifts, as measured by the merged ESOC and WBD DIFFs together with the corresponding time calibrations (TCAL) are computed using 'tcaltrend'. This calculates what the DIFF would be with respect to an optimum time correlation performed at most every 30 days, and allows long term trends in the clock drift to be seen.

3.7 Validation using 'wbdtcor'

The WBD DIFFs are compared to the merged DIFF using 'wbdtcor'. The current version of this software allows for the known timing offsets of the DSN stations (specified in `gsotable.txt`), so ideally the differences reported should be zero. Following the manual correction of the ESOC DIFFs above, all differences (WBD-ESOC) are under 10 μ s.

4 Generation of the ASCII TCOR files

The generation of the ASCII TCOR files is performed on the Sun network where direct access to the Cluster RDM is available. 'maketcor' is used to generate the ASCII TCOR files. For this period version 5.3 was used. This uses the Sun Reference Pulse to track OBTM changes, rather than the WEC clock. This has the advantages that the short term stability is better, and it is available even when WEC is off.

The following commands were used:

```
../maketcor5 -o 1108_1_tcor.txt -d 1108_1_diffmer.txt -f 11_1_shla_files.txt \  
-s 110801 -e 111231 -w 1108_1_wbdiff.txt  
../maketcor5 -o 1108_2_tcor.txt -d 1108_2_diffmer.txt -f 11_2_shla_files.txt \  
-s 110801 -e 111231 -w 1108_2_wbdiff.txt  
../maketcor5 -o 1108_3_tcor.txt -d 1108_3_diffmer.txt -f 11_3_shla_files.txt \  
-s 110801 -e 111231 -w 1108_3_wbdiff.txt  
../maketcor5 -o 1108_4_tcor.txt -d 1108_4_diffmer.txt -f 11_4_shla_files.txt \  
-s 110801 -e 111231 -w 1108_4_wbdiff.txt
```

The resulting ASCII TCOR files were then concatenated with the January to July files produced last year, and the resulting year long files validated.

5 Validation of the TCOR files

The software tool 'maketcor' performs some automatic validation as the files are produced. Data that fails automatic validation are not included in the output files.

Further validation of the TCOR files is performed by generating version 0 CEF files, using these to apply time corrections, then analysing the time tags of the corrected data. The time tags are analysed using 'veritcor'. This takes the time increment between each pair of records in the file, subtracts the nominal value (by default 5.15222168 seconds), and accumulates the minimum, maximum, mean and standard deviation over each 24 hour period. On SC1, 3 and 4 it is known that time jumps of $-125.9\ \mu\text{s}$ occur occasionally. These are counted and removed before further analysis. Gaps in the file are allowed for, and by default 'veritcor' only processes records that are time corrected.

It uses the same HK+TCAL file list file as 'maketcor', although only the HK files are used. 'veritcor' includes the same code module used by TED to apply the TCOR corrections, and requires CEF TCOR files to be installed with the same index files. The '-T .' option specifies that the TCOR files (and the index files) are located in the default directory.

The current version also checks the increment of the WEC master clock pulse as measured by the EW5SSOFF parameter in the WEC HK. This provides an independent check that the phase jumps in the VC0 reset pulse cycle have been correctly identified. The WEC master clock pulse is measured once every telemetry format (5.15222168 seconds). The clock pulses occur every 1.1111 milliseconds, so the time difference between two consecutive measurements should be a multiple of 1.1111 milliseconds. The deviation between each actual measured time and a prediction based on previous pulses is plotted as the 'WECd' parameter in the charts below. The plotted quantity is the maximum deviation at any point in the day. The value typically around $40\ \mu\text{s}$ represents the maximum error of the validated WEC clock measurements. The large value of $460\ \mu\text{s}$ on SC2 is a measurement error.

The initial validation of the data indicated a number of jumps apparently due to incorrect tracking of the VC0 phase. The ASCII TCOR files for all spacecraft were manually modified to correct these. The modified files were called 11_*_tcor_v.txt.


Records removed or modified in the previously delivered files (SC1 and SC3 only) are listed below.

Start	End	SC	Offset	Diff1	Diff2
2011-01-01T18:45:09	2011-01-01T18:45:55	1	-146	0	0
2011-01-18T20:42:08	2011-01-18T20:59:59	1	-819	4	5
2011-01-18T21:00:10	2011-01-19T03:26:55	1	-37	5	20
2011-02-19T03:41:41	2011-02-19T04:33:48	1	0	0	0
2011-02-19T04:33:53	2011-02-19T04:36:48	1	0	0	0
2011-03-20T13:41:13	2011-03-20T15:18:00	1	117	2	3
2011-03-29T09:38:07	2011-03-29T09:38:58	1	-169	-2	-2
2011-04-01T12:46:07	2011-04-01T12:46:59	1	-174	14	14
2011-05-04T20:33:07	2011-05-04T20:33:58	1	-32	1	1
2011-05-06T03:35:11	2011-05-06T03:53:59	1	88	0	-0
2011-05-16T11:25:19	2011-05-16T12:29:59	1	-1134	1	2
2011-05-16T12:30:09	2011-05-16T13:49:56	1	-300	2	4
2011-05-18T03:18:21	2011-05-18T06:33:58	1	89	0	0
2011-01-21T02:35:15	2011-01-21T03:59:56	3	-818	-0	-1
2011-01-21T04:00:06	2011-01-21T13:37:55	3	-37	-1	-5
2011-02-10T12:05:27	2011-02-10T12:14:59	3	-2575859	0	0
2011-02-12T18:24:01	2011-02-12T18:35:00	3	2576236	-0	-0
2011-02-14T23:11:38	2011-02-14T23:19:53	3	-2575859	-0	-1
2011-02-17T09:04:53	2011-02-17T09:29:57	3	2576236	-1	-1
2011-02-21T19:11:04	2011-02-21T19:30:03	3	2576236	-0	-0
2011-02-23T23:58:39	2011-02-24T00:09:59	3	-2575859	-1	-1
2011-02-28T15:23:02	2011-02-28T16:26:40	3	0	0	2
2011-02-28T16:26:53	2011-02-28T16:40:01	3	2576237	2	2
2011-02-28T16:45:18	2011-02-28T16:59:59	3	-881	2	2
2011-02-28T17:00:10	2011-02-28T20:12:56	3	-255	2	7
2011-03-02T19:52:32	2011-03-02T21:04:25	3	0	0	0
2011-03-02T21:04:37	2011-03-02T21:15:01	3	-2575859	0	0
2011-03-02T21:20:18	2011-03-02T21:30:00	3	-755	0	0
2011-03-02T21:30:10	2011-03-02T22:12:56	3	-32	0	0


Veritcor is run using the following commands:

```
../veritcor -f 11_1_shla_files.txt -T . -v 4 -i 5.152221 > 11_1_veri.txt  
../veritcor -f 11_2_shla_files.txt -T . -v 4 -i 5.152221 > 11_2_veri.txt  
../veritcor -f 11_3_shla_files.txt -T . -v 4 -i 5.152221 > 11_3_veri.txt  
../veritcor -f 11_4_shla_files.txt -T . -v 4 -i 5.152221 > 11_4_veri.txt
```


Cluster SC1 timing analysis, 2011

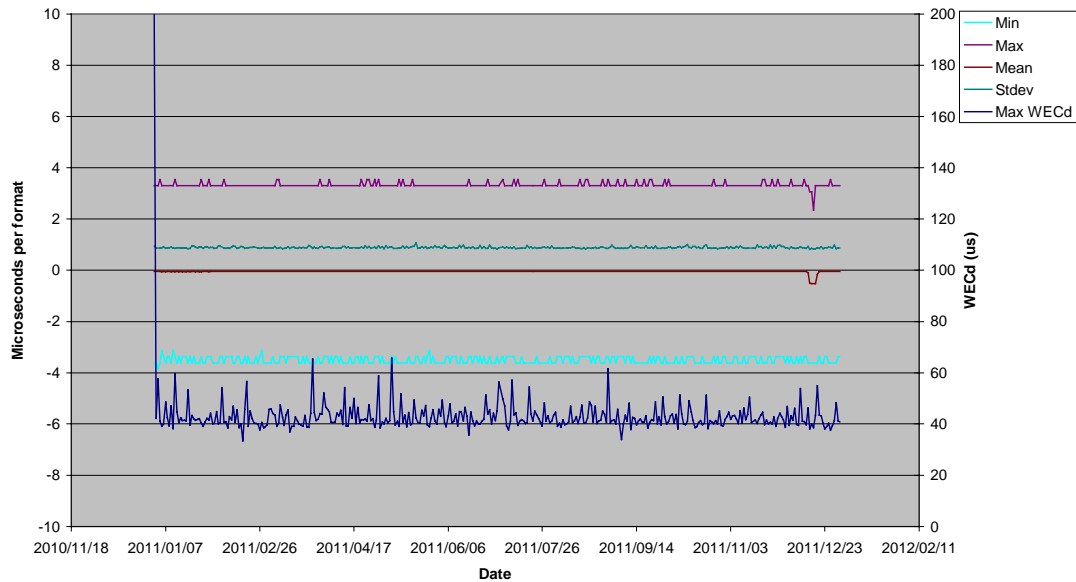


Cluster SC2 timing analysis, 2011

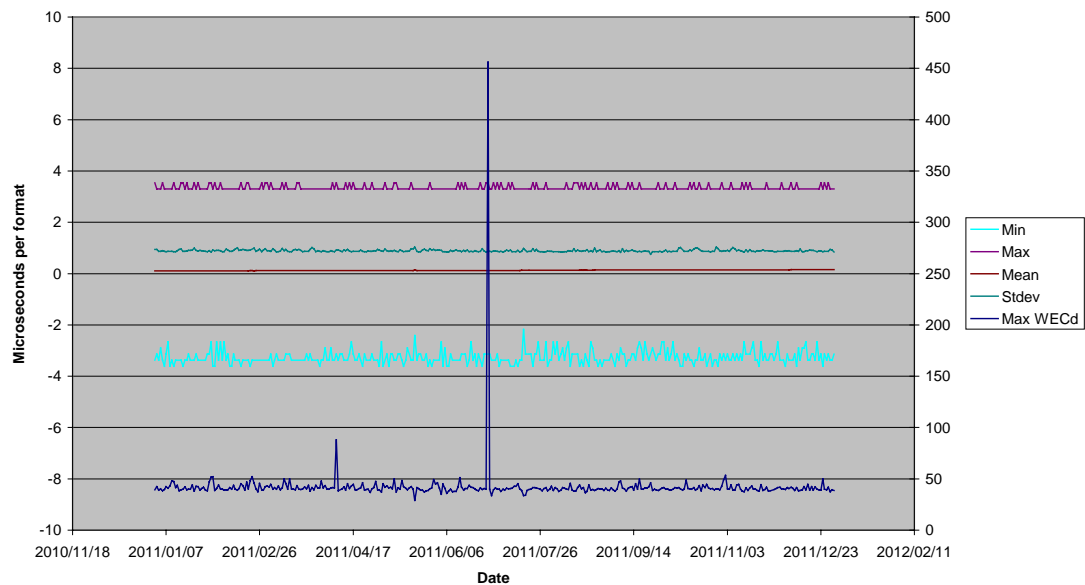

Cluster SC3 timing analysis, 2011

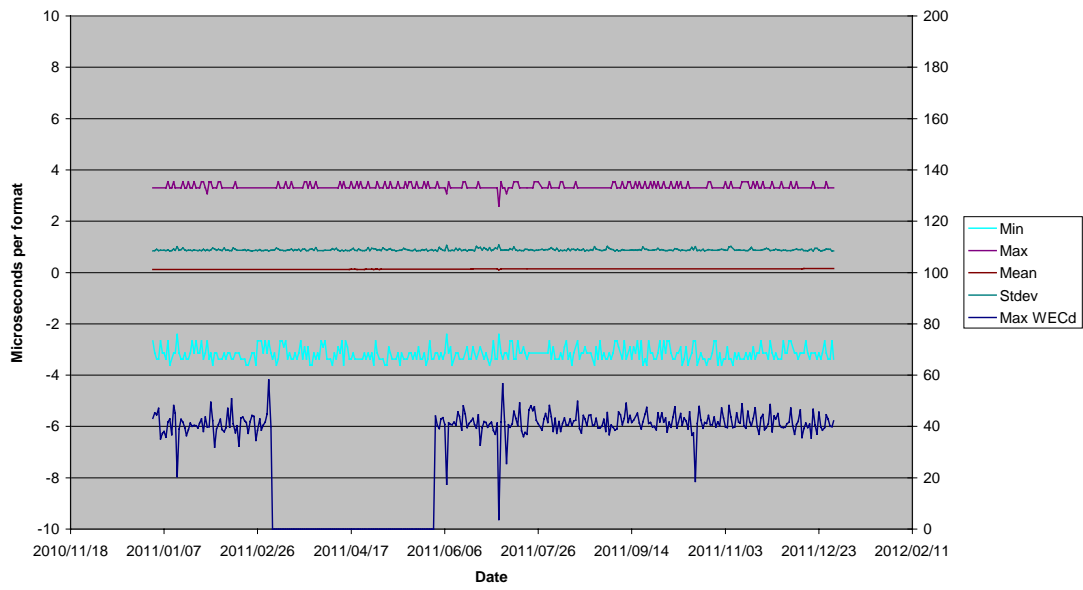

Cluster SC4 timing analysis, 2011

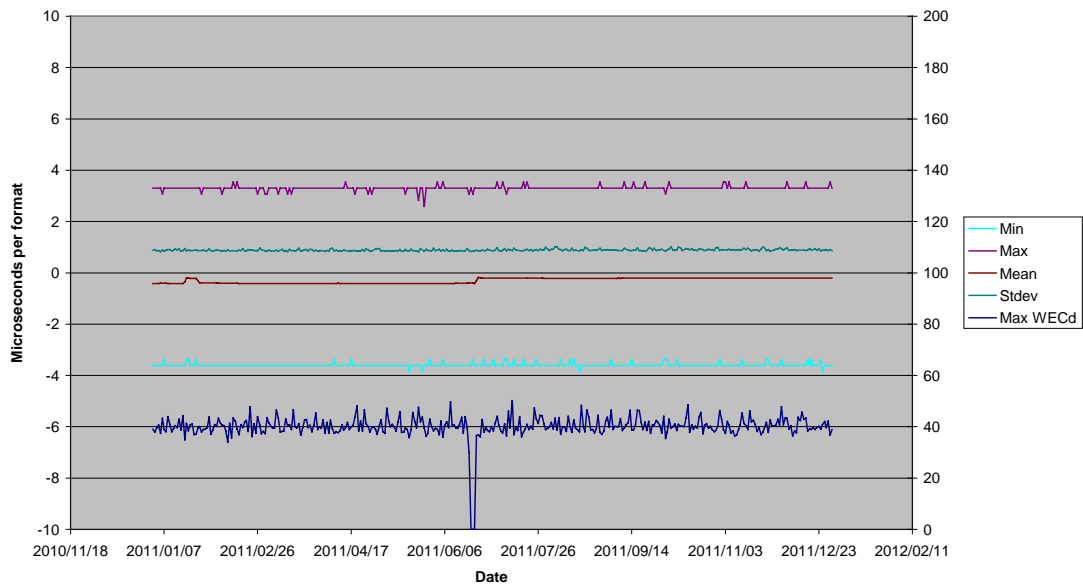

6 Production of the CEF files

The final CEF files were produced by running TCOR2CEF on the validated ASCII format TCOR files, with version number 2 specified.

```
../tcor2cef -t 11_1_tcor_v.txt -v 02
../tcor2cef -t 11_2_tcor_v.txt -v 02
../tcor2cef -t 11_3_tcor_v.txt -v 02
../tcor2cef -t 11_4_tcor_v.txt -v 02
```

The file comparison utility (diff) was used to check that the only changes between the version 0 files used for validation, and the final version, are in the filenames, version numbers, and generation date.

```
diff C1_CP_DWP_TCOR__20110101_V00.cef \
    C1_CP_DWP_TCOR__20110101_V02.cef
diff C2_CP_DWP_TCOR__20110101_V00.cef \
    C2_CP_DWP_TCOR__20110101_V02.cef
diff C3_CP_DWP_TCOR__20110101_V00.cef \
    C3_CP_DWP_TCOR__20110101_V02.cef
diff C4_CP_DWP_TCOR__20110101_V00.cef \
    C4_CP_DWP_TCOR__20110101_V02.cef
```

Finally, the CEF files are checked using CEFpass.

```
setenv CEFPATH ~/CAA/headers
~/CAAtools/CEFPass C1_CP_DWP_TCOR__20110101_V02.cef
~/CAAtools/CEFPass C2_CP_DWP_TCOR__20110101_V02.cef
~/CAAtools/CEFPass C3_CP_DWP_TCOR__20110101_V02.cef
~/CAAtools/CEFPass C4_CP_DWP_TCOR__20110101_V02.cef
```

7 Caveats

The following general caveats apply to 2011 TCOR data.

TCOR data is not available at all times. For this period, TCOR coverage is around 83% to 98%. The reasons for lack of availability are usually:

- The discontinuity in the On Board Time at 'power down' or 'decoder only' eclipses, or CTU reboots, leading to non-availability of the DIFF measurements.
- It should be noted however, that in many cases missing TCOR data occurs when the payload is off, so is of no consequence.

Interpolation between TCOR records in CEF files is only permitted in limited circumstances. The time corrections are provided at the start and end times of each period of the same telemetry mode.

The OFFSET is constant throughout each period, and the same value will be written in the records at the start and end of the period. If the OFFSET values before and after the required time are different, or either has the fill value of -1e31, then OFFSET is not available for that period. No interpolation between different OFFSET values is allowed.

The DIFF may be obtained by linear interpolation of the DIFF values immediately before and after the required time. However, if either DIFF has the fill value of -1e31, then DIFF is not available for that period. It is not allowed to interpolate over a fill value.